


MEATON

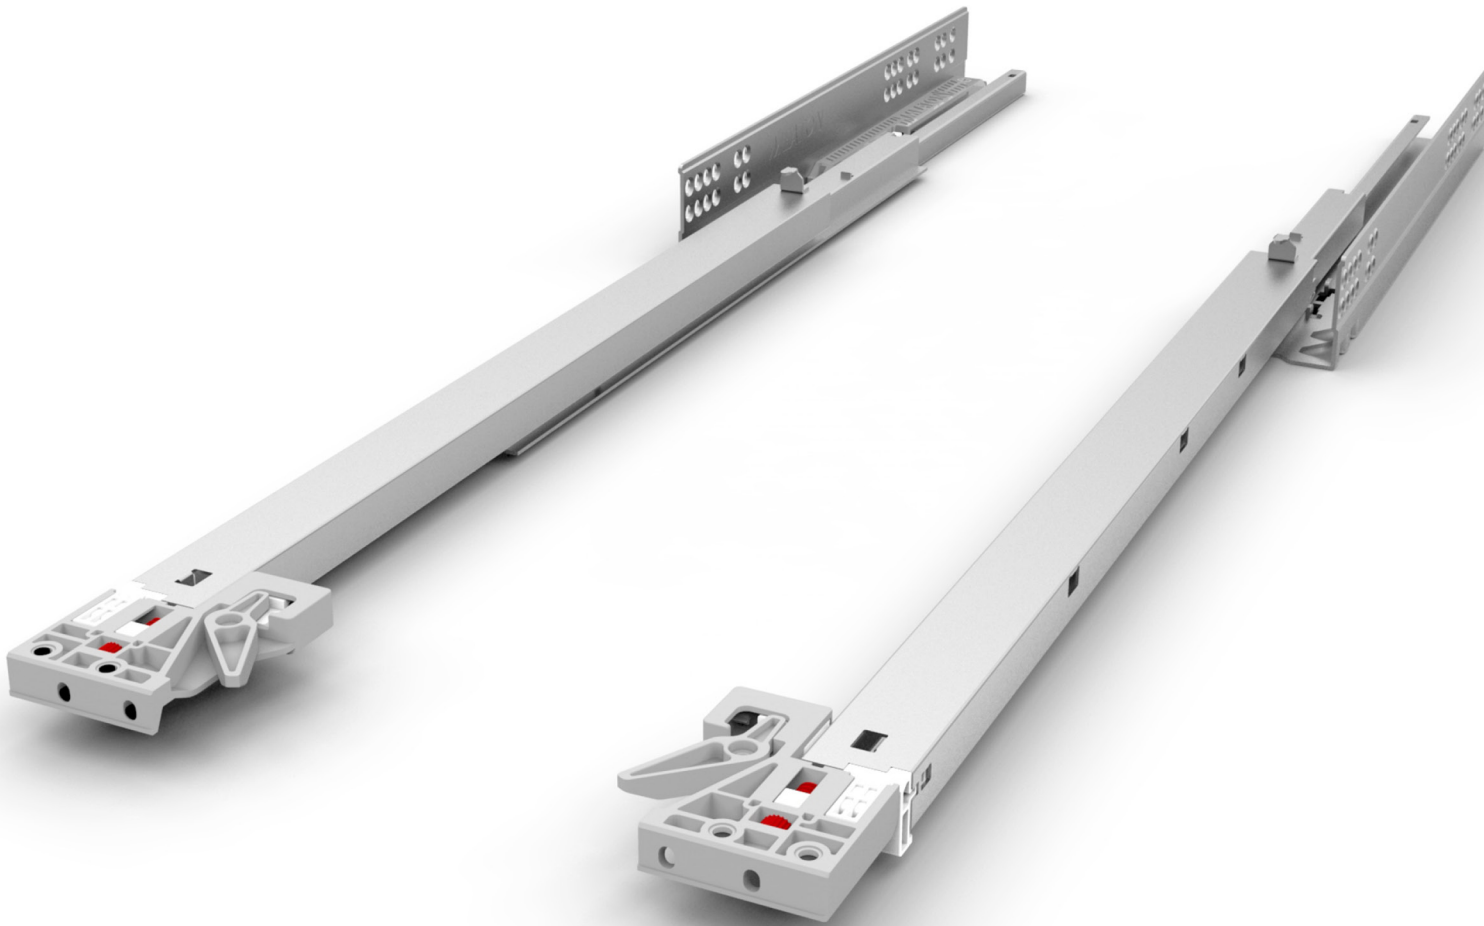

Slide Series

Slide series

- **DY2201 & DY4201**

2-Fold concealed soft-closing drawer slide(16/19mm with bolt locking)

-----C.4



- **DY2221 & DY4221**

2-Fold concealed soft-closing drawer slide(16/19mm with bolt locking)

-----C.6



- **DY2331 & DY4331**

2-Fold concealed soft-closing drawer slide(16/19mm with handle)

-----C.8



- **DY2341 & DY4341**

2-Fold concealed soft-closing drawer slide(16/19mm with handle)

-----C.10



- **DY3201 & DH3201(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with bolt locking)

-----C.12



- **DY5201 & DH5201(Synchronized)**

3-Fold concealed soft-closing drawer slide(19mm with bolt locking)

-----C.14



- **DY3221 & DH3221(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with bolt locking)

-----C.16



- **DY5221 & DH5221(Synchronized)**

3-Fold concealed soft-closing drawer slide(19mm with bolt locking)

-----C.18



- **DY3331 & DH3331(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with handle)

-----C.20



- **DY5331 & DH5331(Synchronized)**

3-Fold concealed soft-closing drawer slide(19mm with handle)

-----C.22



- **DY3341 & DH3341(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with handle)

-----C.24



- **DY5341 & DH5341(Synchronized)**

3-Fold concealed soft-closing drawer slide(19mm with handle)

-----C.26



- **DY3326 & DH3326(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with handle) - American type

-----C.28



- **DY5326 & DH5326(Synchronized)**

3-Fold concealed soft-closing drawer slide(16mm with handle) - American type

-----C.30



- **DY6201**

2-Fold light concealed soft-closing drawer slider (16mm with bolt locking)

-----C.3



- **DY6331**

2-Fold light concealed soft-closing drawer slider (16mm with handle)

-----C.34



• **DP2201 & DP4201**

2-Fold concealed push-open drawer slide(16/19mm with bolt locking)

-----C.32



• **DP2221 & DP4221**

2-Fold concealed push-open drawer slide(16/19mm with bolt locking)

-----C.34



• **DP2331 & DP4331**

2-Fold concealed push-open drawer slide(16/19mm with handle)

-----C.36



• **DP2341 & DP4341**

2-Fold concealed push-open drawer slide(16/19mm with handle)

-----C.38



• **DP3201 & DT3201(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with bolt locking)

-----C.40



• **DP5201 & DT5201(Synchronized)**

3-Fold concealed push-open drawer slide(19mm with bolt locking)

-----C.42



• **DP3221 & DT3221(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with bolt locking)

-----C.44



• **DP5221 & DT5221(Synchronized)**

3-Fold concealed push-open drawer slide(19mm with bolt locking)

-----C.46



• **DP3331 & DT3331(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with handle)

-----C.48



• **DP5331 & DT5331(Synchronized)**

3-Fold concealed push-open drawer slide(19mm with handle)

-----C.50



• **DP3341 & DT3341(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with handle)

-----C.52



• **DP5341 & DT5341(Synchronized)**

3-Fold concealed push-open drawer slide(19mm with handle)

-----C.54



• **DP3326 & DT3326(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with handle) - American type

-----C.56



• **DP5326 & DT5326(Synchronized)**

3-Fold concealed push-open drawer slide(16mm with handle) - American type

-----C.30



• **DP6201**

2-Fold light concealed push-open drawer slider (16mm with bolt locking)

-----C.3



• **DP6331**

2-Fold light concealed push-open drawer slider (16mm with handle)

-----C.34



2-Fold concealed drawer slide(with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 80,000 cycles.
- Thickness of board: DY2201: $\leq 16\text{mm}$
DY4201: $\leq 19\text{mm}$
- Adjustable opening and closing strength: +25%
- Partial extension, bolt front fixing, easy height adjustment, economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- Opening and closing strength can be adjusted with eccentric screw on the damper.





Length	Item No. DY2201	Item No. DY4201
	16mm with bolt	19mm with bolt
250mm	522.240.000	522.240.020
270mm	522.240.001	522.240.021
300mm	522.240.002	522.240.022
350mm	522.240.003	522.240.023
400mm	522.240.004	522.240.024
450mm	522.240.005	522.240.025
500mm	522.240.006	522.240.026
550mm	522.240.007	522.240.027
600mm	522.240.008	522.240.028


Installation dimensions

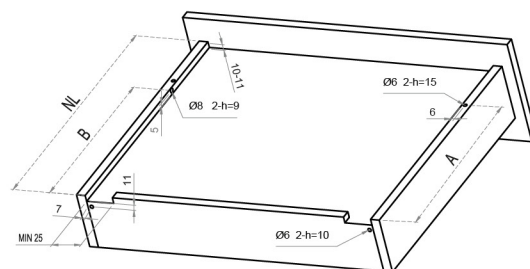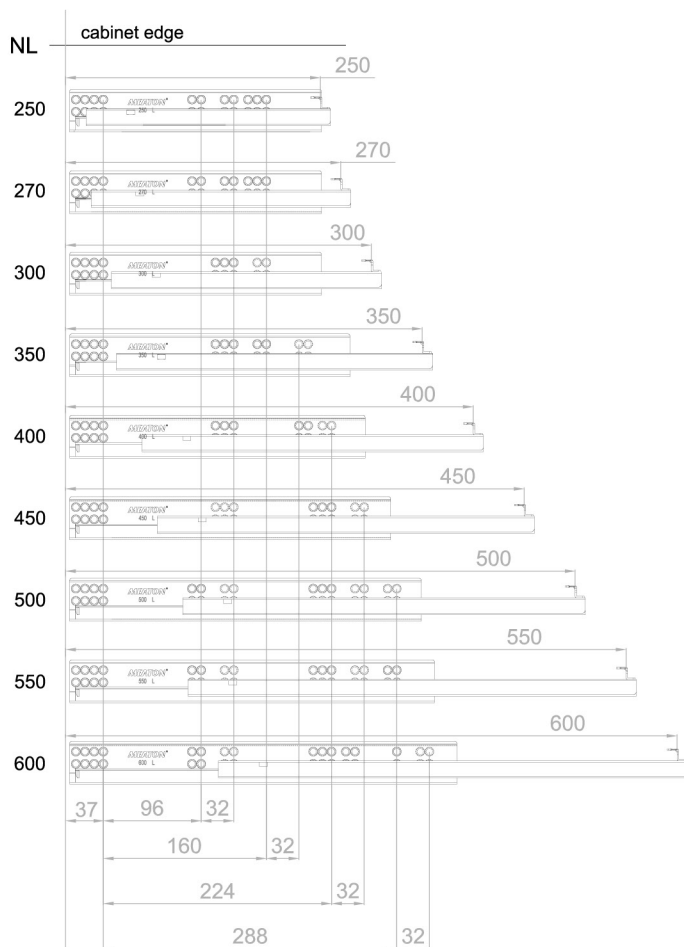

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	186	201	211	256	281	316	341	386	406

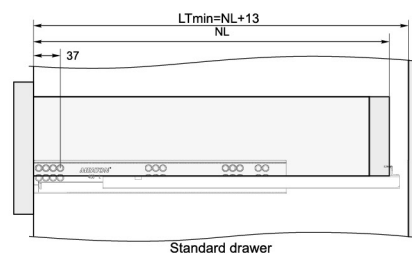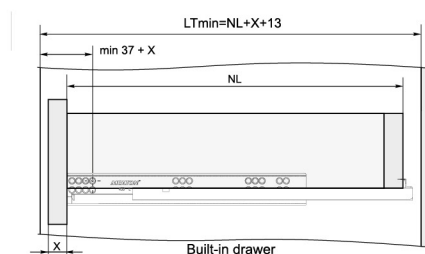


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

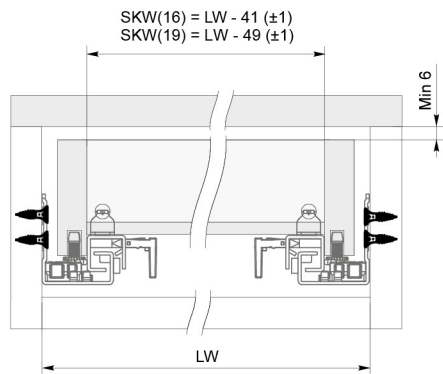DY2201 & DY4201 2-Fold soft-closing concealed drawer slide(with bolt locking)


LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

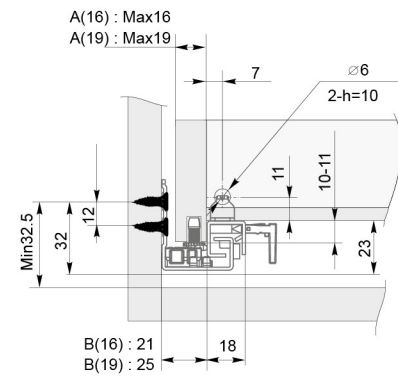

A(16) Be used for slide rails with a drawer side A(19) thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side B(19) thickness no thinner than 19mm.

1. Install the slides on the cabinet



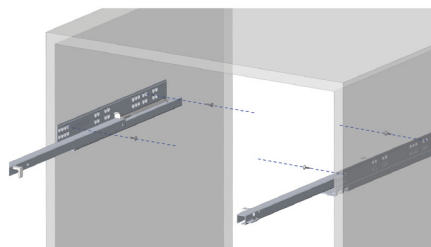


2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall



2.3 Adjust the left/right screw to make the drawer horizontal

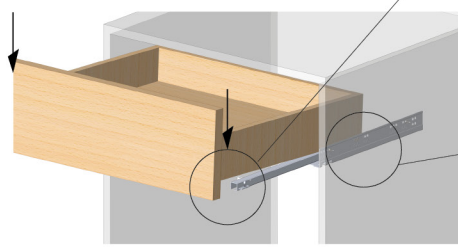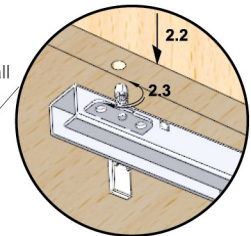

3. Fix the drawer and slides


3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls

3.2 Close the drawer

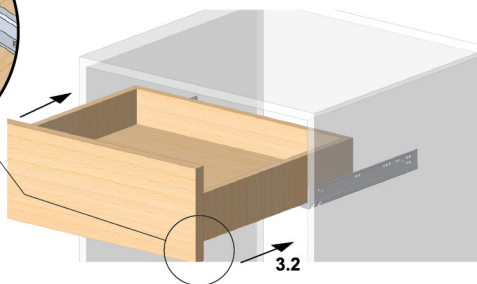

4. Adjustable opening and closing mechanism:

When the drawer takes more than 20kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.


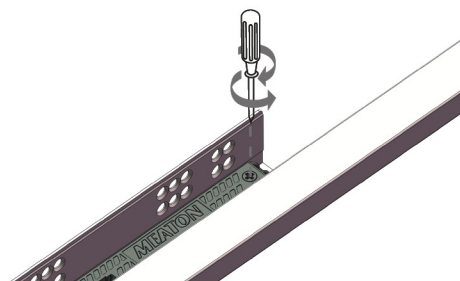


5. Disassembly of the drawer

5.1 Take out the plastic pin to separate the drawer from the slides

5.2 Take up the drawer

5.3 Draw out the drawer

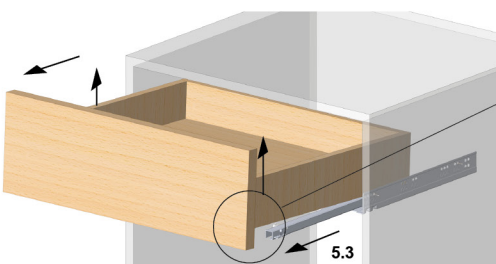

2-Fold concealed drawer slide(with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 80,000 cycles.
- Thickness of board: DY2221: $\leq 16\text{mm}$
DY4221: $\leq 19\text{mm}$
- Adjustable opening and closing strength: +25%
- Partial extension, bolt front fixing, easy height adjustment, economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- Opening and closing strength can be adjusted with eccentric screw on the damper.





Length	Item No. DY2221	Item No. DY4221
	16mm with bolt	19mm with bolt
240mm	522.240.010	522.240.030
260mm	522.240.011	522.240.031
290mm	522.240.012	522.240.032
340mm	522.240.013	522.240.033
390mm	522.240.014	522.240.034
440mm	522.240.015	522.240.035
490mm	522.240.016	522.240.036
540mm	522.240.017	522.240.037
590mm	522.240.018	522.240.038


Installation dimensions

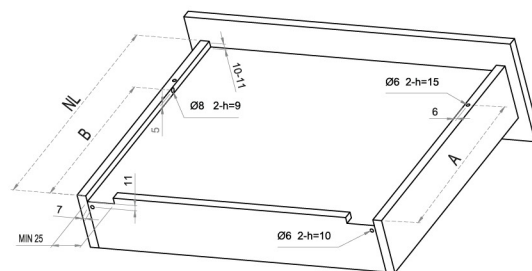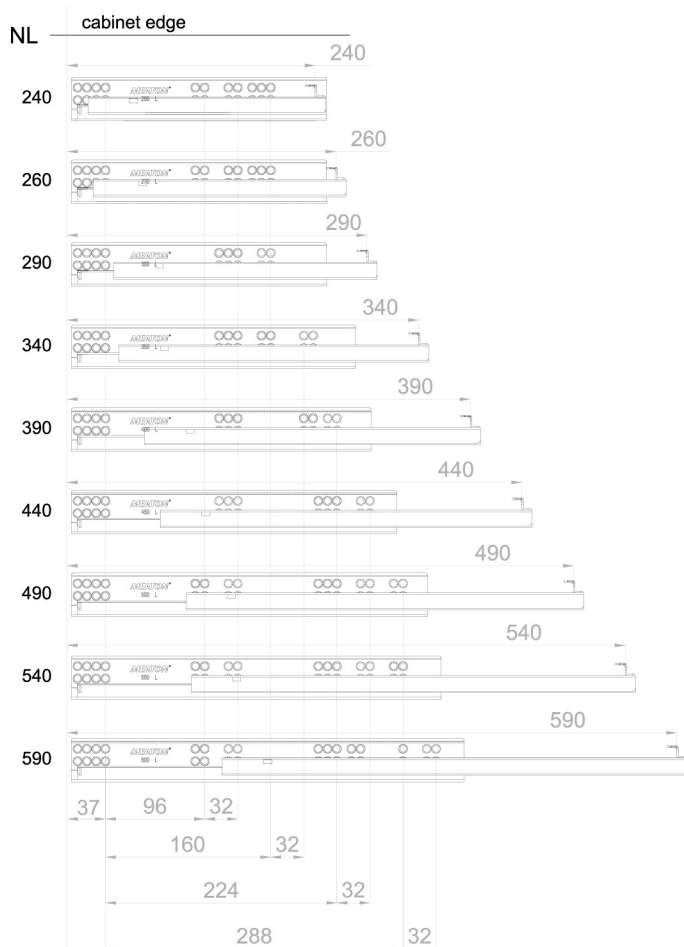

NL	240	260	290	340	390	440	490	540	590
A	220	230	245	270	305	330	355	390	415
B	188	198	213	238	273	298	323	358	383

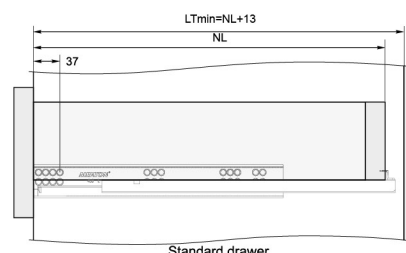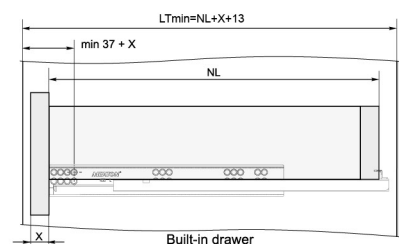


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

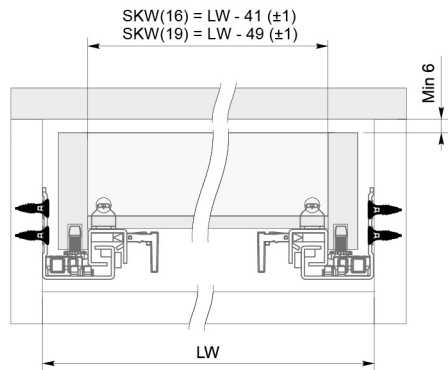DY2221 & DY4221 2-Fold soft-closing concealed drawer slide(with bolt locking)


LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

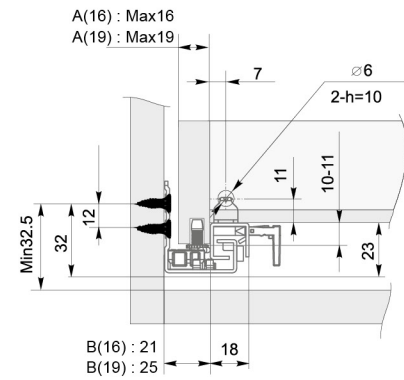

A(16) Be used for slide rails with a drawer side A(19) thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side B(19) thickness no thinner than 19mm.

1. Install the slides on the cabinet



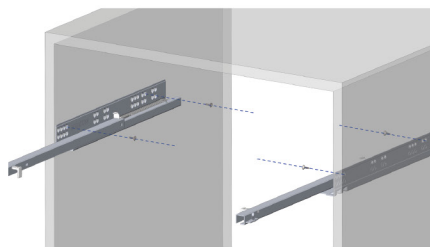


2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall


2.3 Adjust the left/right screw to make the drawer horizontal

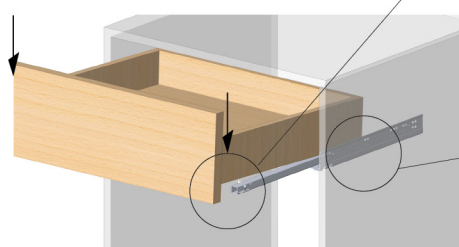

3. Fix the drawer and slides


3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls

3.2 Close the drawer

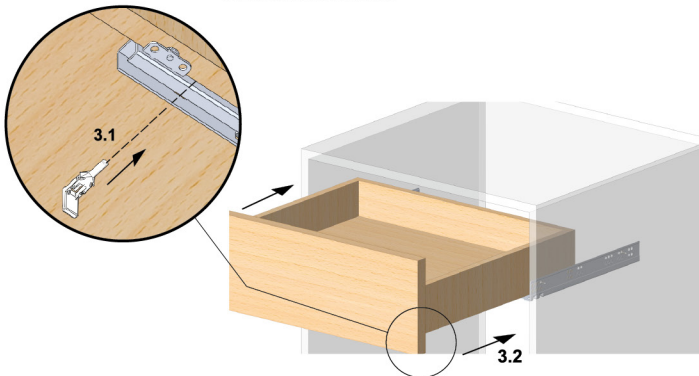

4. Adjustable opening and closing mechanism:

When the drawer takes more than 20kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.


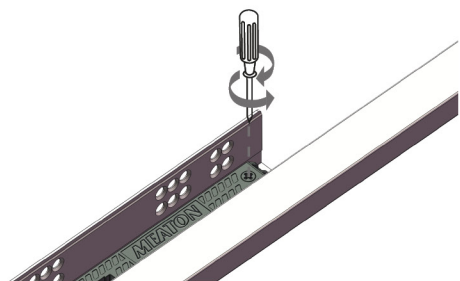


5. Disassembly of the drawer

5.1 Take out the plastic pin to separate the drawer from the slides

5.2 Take up the drawer


5.3 Draw out the drawer

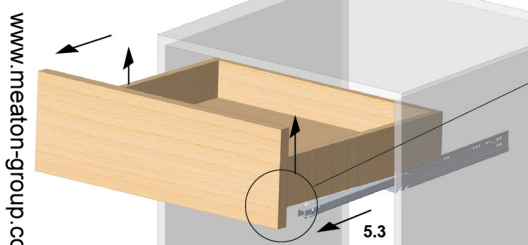

2-Fold concealed drawer slide(with handle)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 80,000 cycles.
- Thickness of board: DY2331: $\leq 16\text{mm}$
DY4331: $\leq 19\text{mm}$
- Adjustable opening and closing strength: +25%
- Partial extension, handle front fixing device, easy height adjustment
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- Opening and closing strength can be adjusted with eccentric screw on the damper.

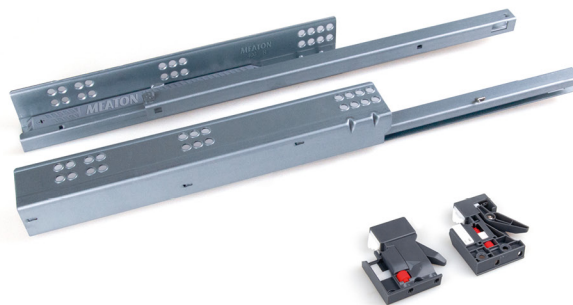


Length	Item No. DY2331 16mm with handle	Item No. DY4331 19mm with handle
250mm	522.210.000	522.240.020
270mm	522.210.001	522.240.021
300mm	522.210.002	522.240.022
350mm	522.210.003	522.240.023
400mm	522.210.004	522.240.024
450mm	522.210.005	522.240.025
500mm	522.210.006	522.240.026
550mm	522.210.007	522.240.027
600mm	522.210.008	522.240.028

Installation dimensions

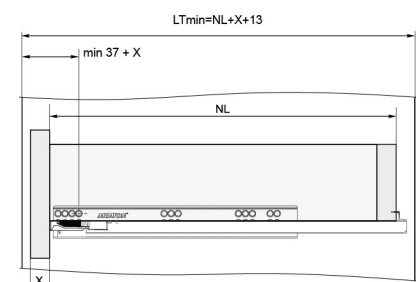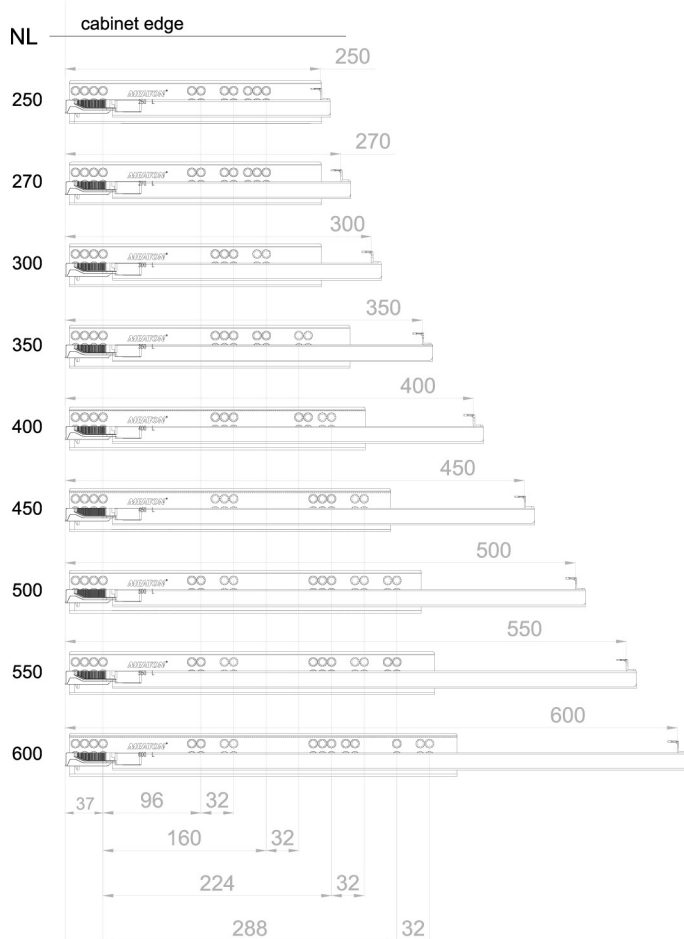


Built-in drawer

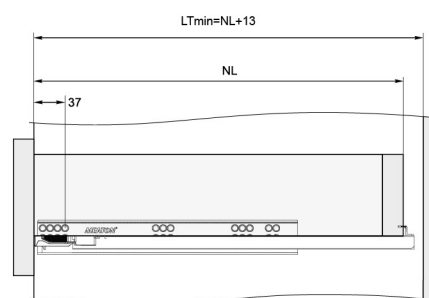

Standard drawer


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

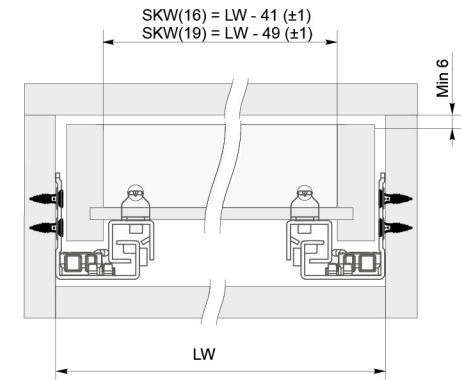DY2331 & DY4331 2-Fold concealed soft-closing drawer slide(with handle)


LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

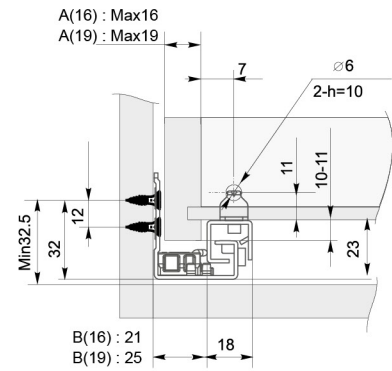


A(16) Be used for slide rails with a drawer side A(19) thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side B(19) thickness no thinner than 19mm.


1. Install the slides on the cabinet

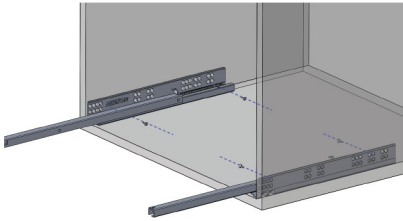


2. Install left/ right handle in the front of the drawer

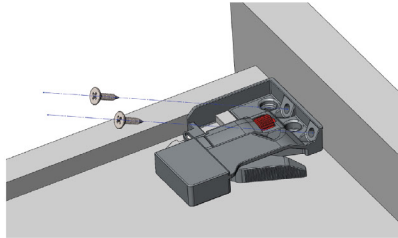

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

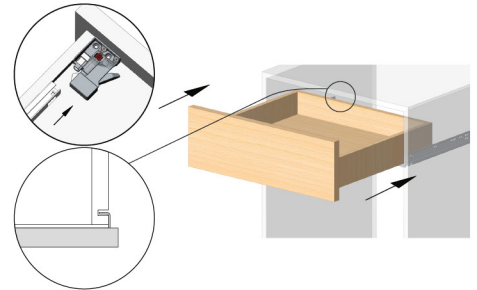


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm


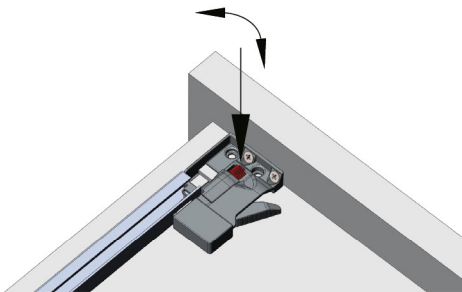


5. Adjustable opening and closing mechanism:

When the drawer takes more than 20kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

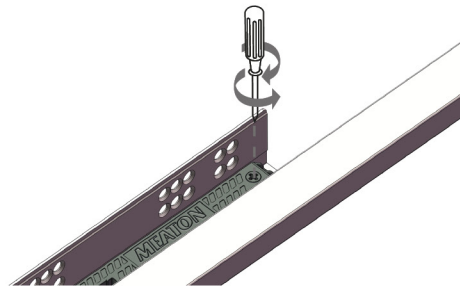


6. Push the handle lever to unlock the drawer, then pull out the drawer

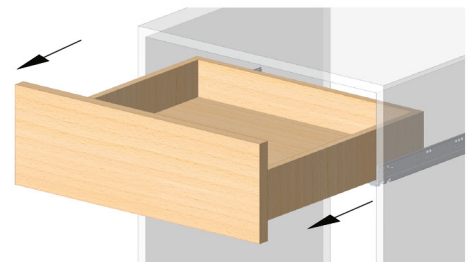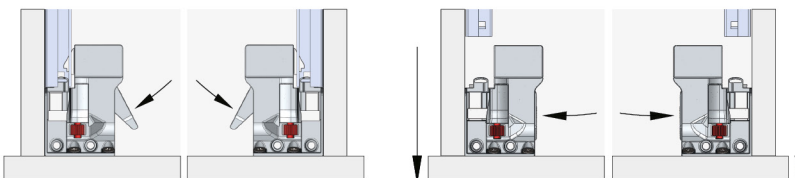

2-Fold concealed drawer slide(with handle)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 80,000 cycles.
- Thickness of board: DY2341: $\leq 16\text{mm}$
DY4341: $\leq 19\text{mm}$
- Adjustable opening and closing strength: +25%
- Partial extension, handle front fixing device, easy height adjustment
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- Opening and closing strength can be adjusted with eccentric screw on the damper.

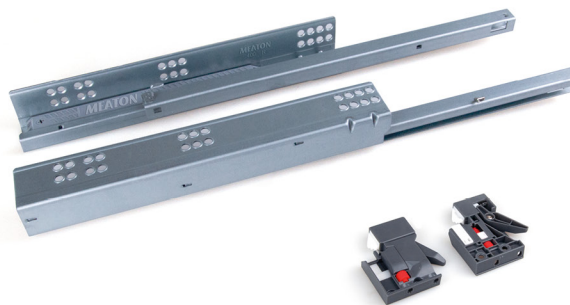


Length	Item No. DY2341	Item No. DY4341
	16mm with handle	19mm with handle
240mm	522.210.010	522.240.030
260mm	522.210.011	522.240.031
290mm	522.210.012	522.240.032
340mm	522.210.013	522.240.033
390mm	522.210.014	522.240.034
440mm	522.210.015	522.240.035
490mm	522.210.016	522.240.036
540mm	522.210.017	522.240.037
590mm	522.210.018	522.240.038

Installation dimensions

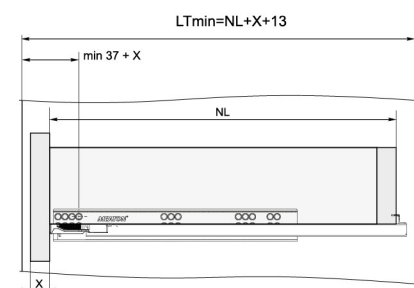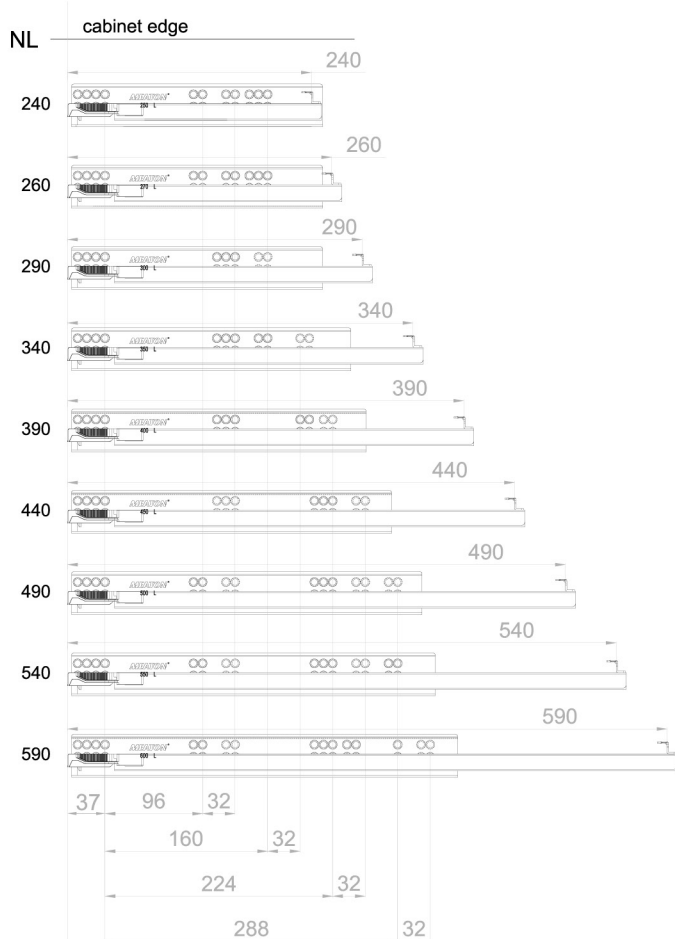


Built-in drawer

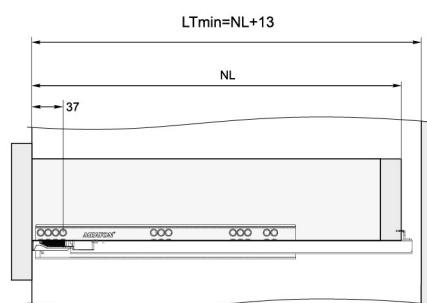

Standard drawer


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

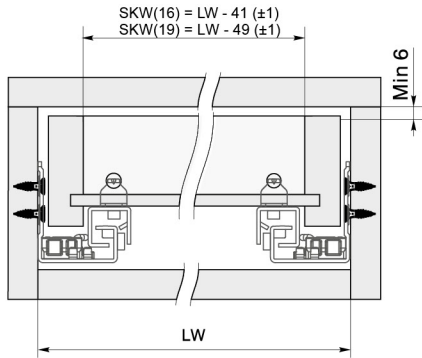DY2341 & DY4341 2-Fold soft-closing concealed drawer slide(with handle)


LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

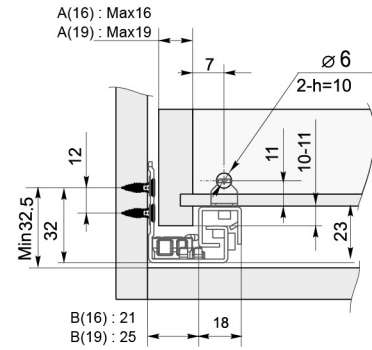


A(16) Be used for slide rails with a drawer side A(19) thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side B(19) thickness no thinner than 19mm.


1. Install the slides on the cabinet

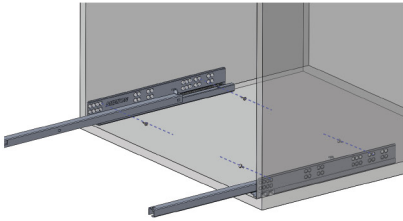


2. Install left/ right handle in the front of the drawer

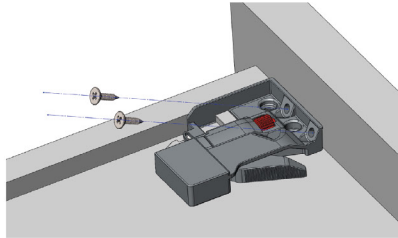

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

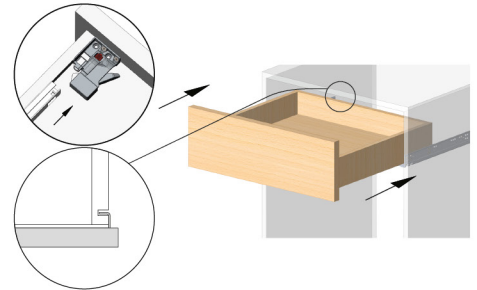


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm


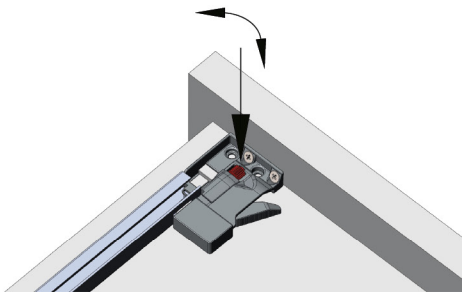


5. Adjustable opening and closing mechanism:

When the drawer takes more than 20kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

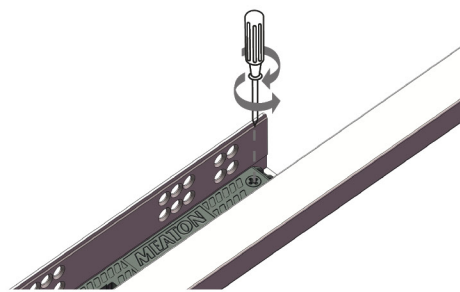


6. Push the handle lever to unlock the drawer, then pull out the drawer

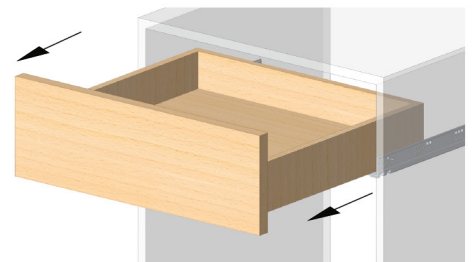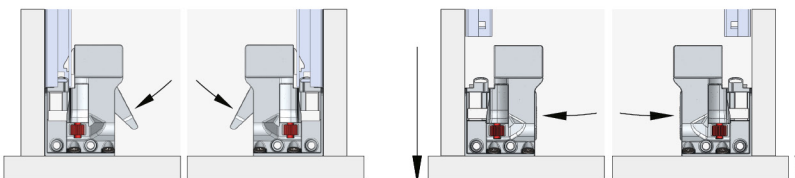

3-Fold concealed drawer slide(16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
 - Adjustable opening and closing strength: +25%
- Full extension, bolt front fixing, easy height adjustment, economical solution for industry.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH3201 bear the synchronized system function.


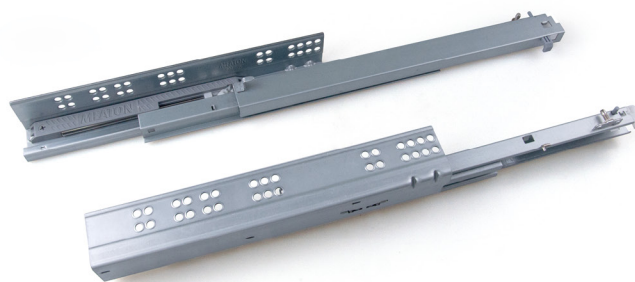


Length	Item No. DY3201	Item No. DH3201
	Soft-closing	Synchronized
250mm	522.340.000	522.340.040
270mm	522.340.001	522.340.041
300mm	522.340.002	522.340.042
350mm	522.340.003	522.340.043
400mm	522.340.004	522.340.044
450mm	522.340.005	522.340.045
500mm	522.340.006	522.340.046
550mm	522.340.007	522.340.047
600mm	522.340.008	522.340.048


Installation dimensions

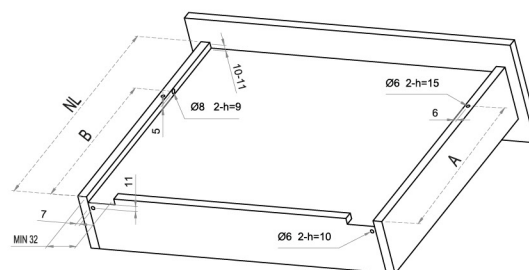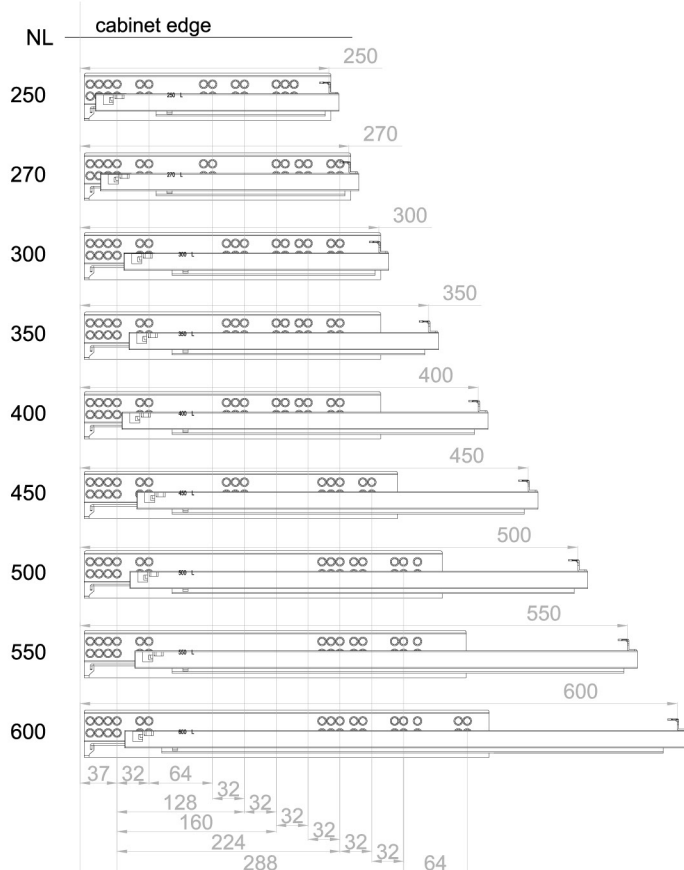

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	220.5	235.5	242	287	344	379	436	481	531

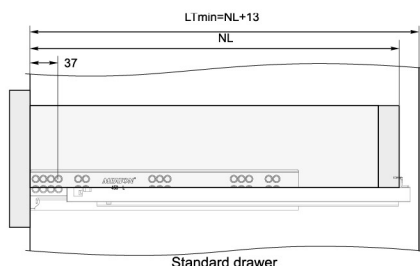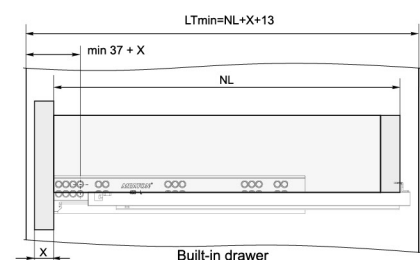


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

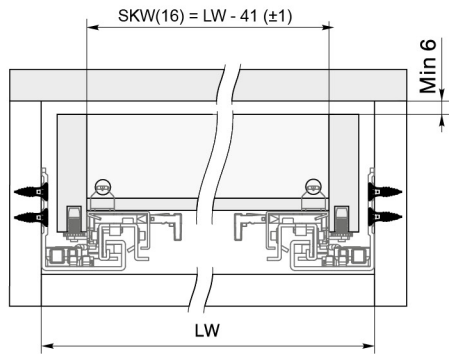
DY3201 & DH3201 3-Fold concealed drawer slide(16mm with bolt locking)


LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)



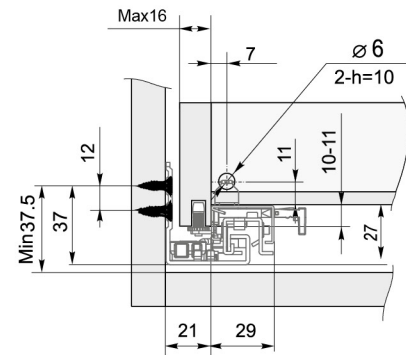


1. Install the slides on the cabinet

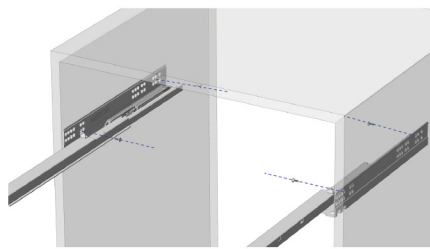



2. Set the drawer on the slides

- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal

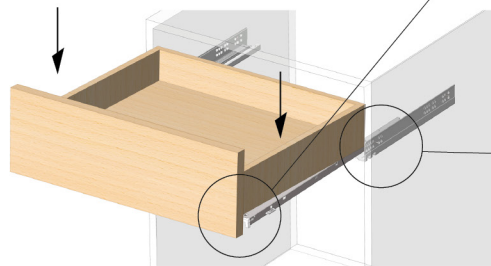


3. Fix the drawer and slides

- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer

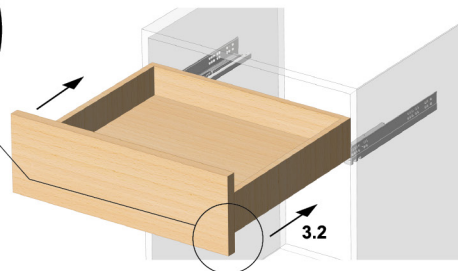



4. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

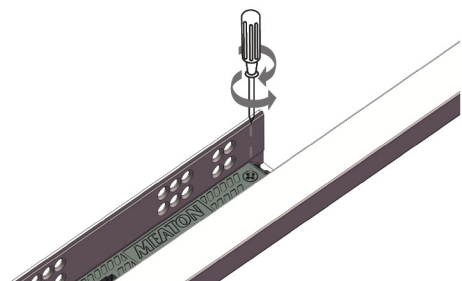

5. Disassembly of the drawer


- 5.1 Take out the plastic pin to separate the drawer from the slides
- 5.2 Take up the drawer
- 5.3 Draw out the drawer

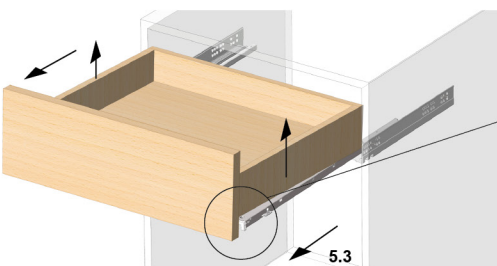

3-Fold concealed drawer slide(19mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 19\text{mm}$.
 - Adjustable opening and closing strength: +25%
-
- Full extension, bolt front fixing, easy height adjustment, economical solution for industry.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH5201 bear the synchronized system function.


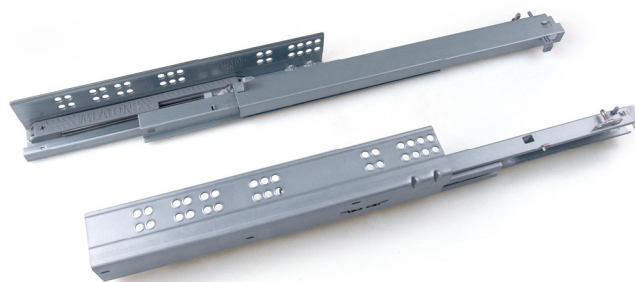


Length	Item No. DY5201	Item No. DH5201
	Soft-closing	Synchronized
250mm	522.340.020	522.340.060
270mm	522.340.021	522.340.061
300mm	522.340.022	522.340.062
350mm	522.340.023	522.340.063
400mm	522.340.024	522.340.064
450mm	522.340.025	522.340.065
500mm	522.340.026	522.340.066
550mm	522.340.027	522.340.067
600mm	522.340.028	522.340.068


Installation dimensions

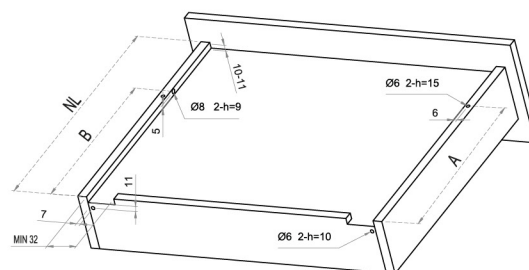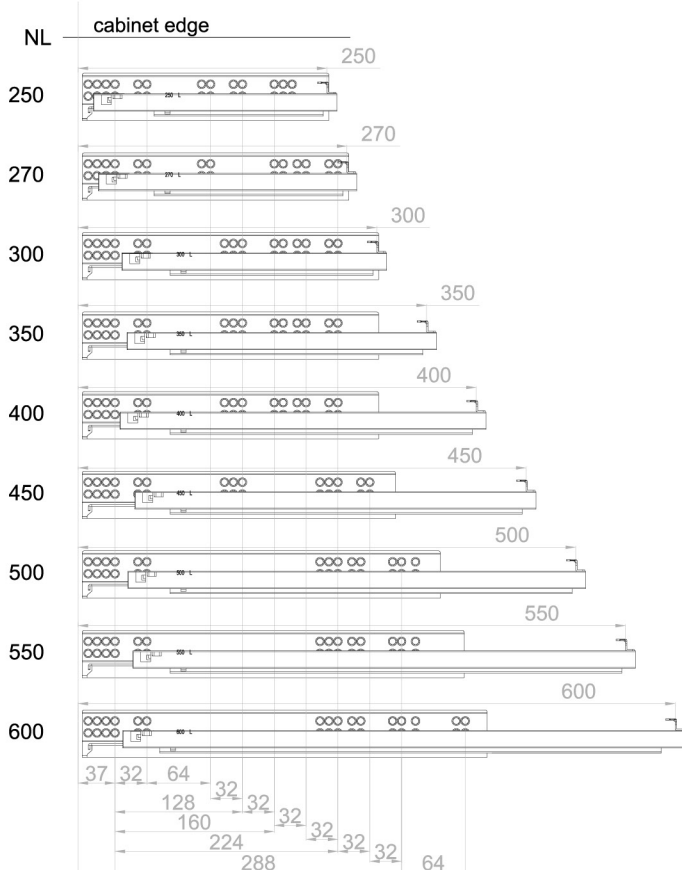

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	220.5	235.5	242	287	344	379	436	481	531

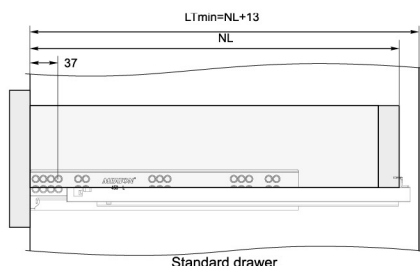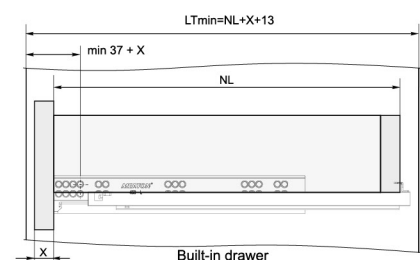


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

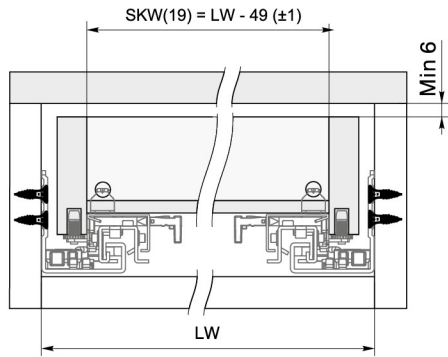
DY5201 & DH5201 3-Fold concealed drawer slide(19mm with bolt locking)


LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)

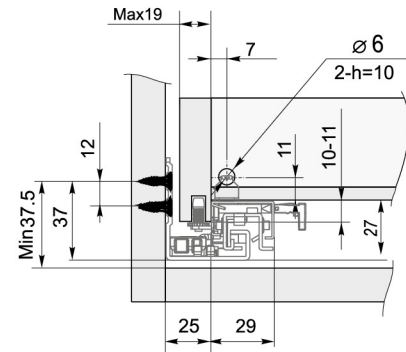

1. Install the slides on the cabinet



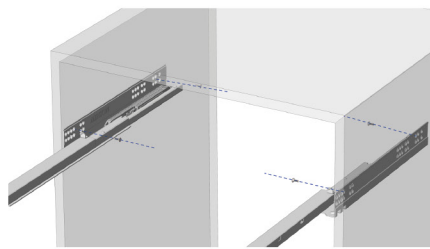


2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall



2.3 Adjust the left/right screw to make the drawer horizontal

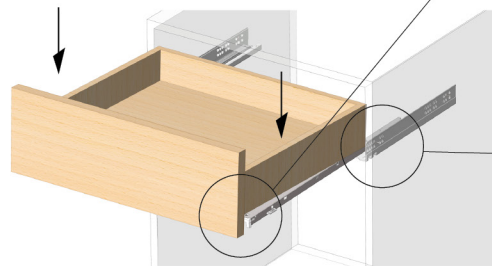

3. Fix the drawer and slides


3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls

3.2 Close the drawer

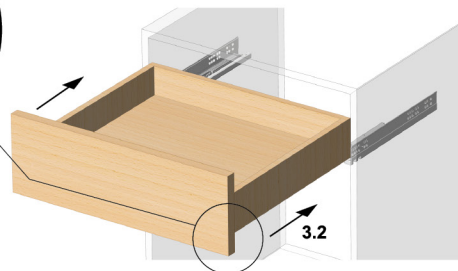

4. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.


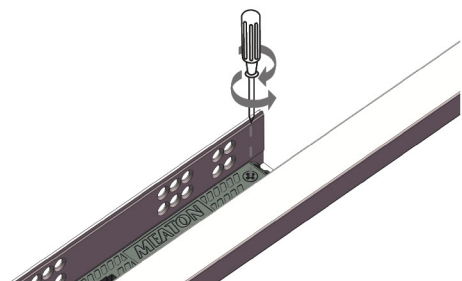


5. Disassembly of the drawer

5.1 Take out the plastic pin to separate the drawer from the slides

5.2 Take up the drawer


5.3 Draw out the drawer

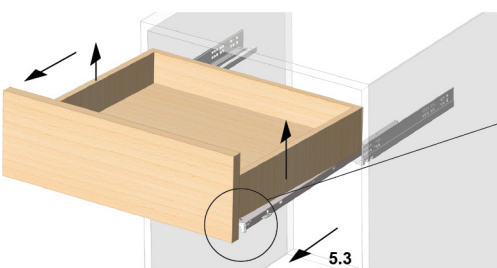

3-Fold concealed drawer slide(16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
 - Adjustable opening and closing strength: +25%
- Full extension, bolt front fixing, easy height adjustment, economical solution for industry.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH3221 bear the synchronized system function.


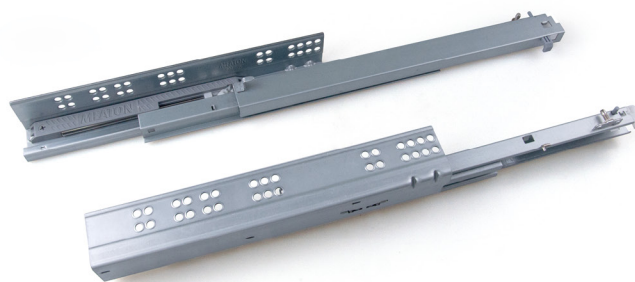


Length	Item No. DY3221	Item No. DH3221
	Soft-closing	Synchronized
240mm	522.340.010	522.340.050
260mm	522.340.011	522.340.051
290mm	522.340.012	522.340.052
340mm	522.340.013	522.340.053
390mm	522.340.014	522.340.054
440mm	522.340.015	522.340.055
490mm	522.340.016	522.340.056
540mm	522.340.017	522.340.057
590mm	522.340.018	522.340.058


Installation dimensions

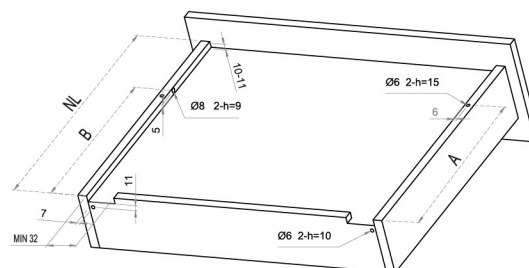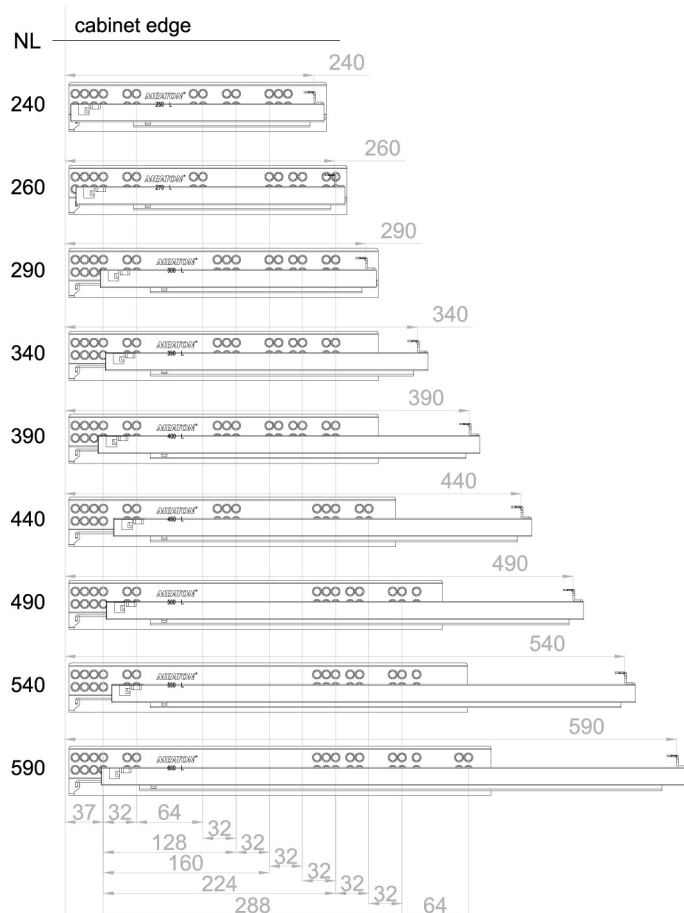

NL	240	260	290	340	390	440	490	540	590
A	190	205	245	270	305	330	355	390	415
B	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5

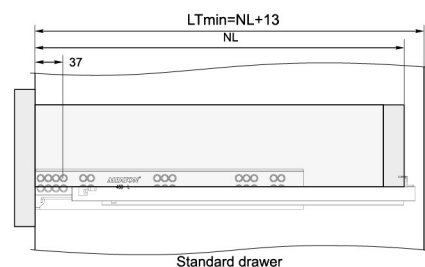
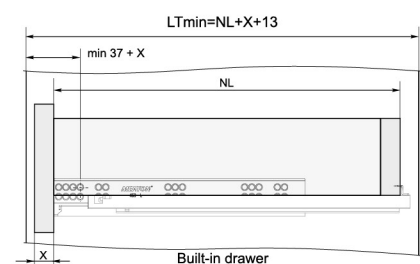


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness



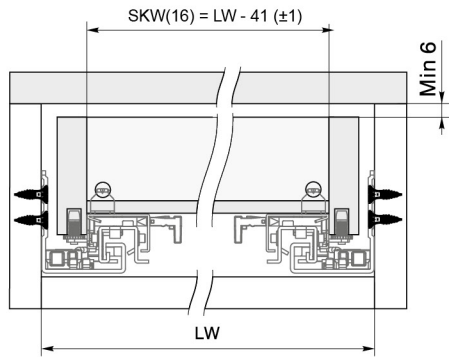
DY3221&DH3221 3-Fold concealed drawer slide(16mm with bolt locking)


LW - Cabinet inner width



SKW(16) - Drawer inner width(≤16mm drawer side thickness)

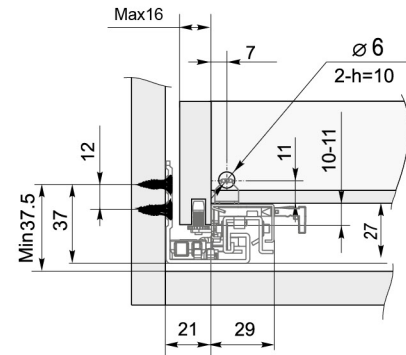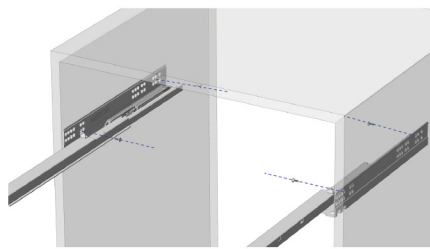
1. Install the slides on the cabinet

2. Set the drawer on the slides

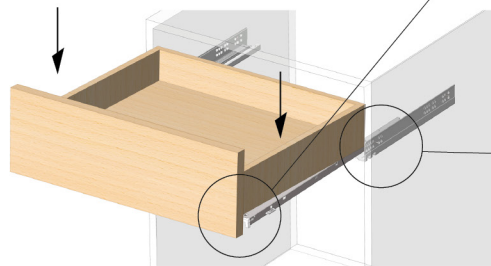
- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

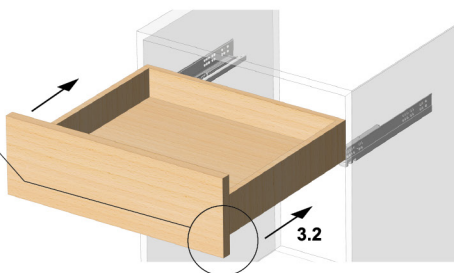
- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer


4. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

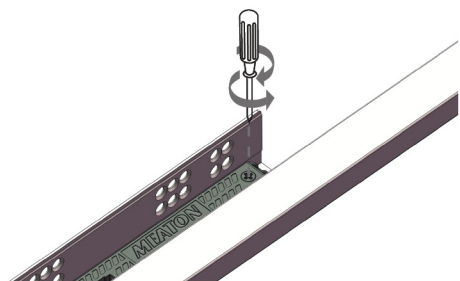
5. Disassembly of the drawer


- 5.1 Take out the plastic pin to separate the drawer from the slides
- 5.2 Take up the drawer
- 5.3 Draw out the drawer

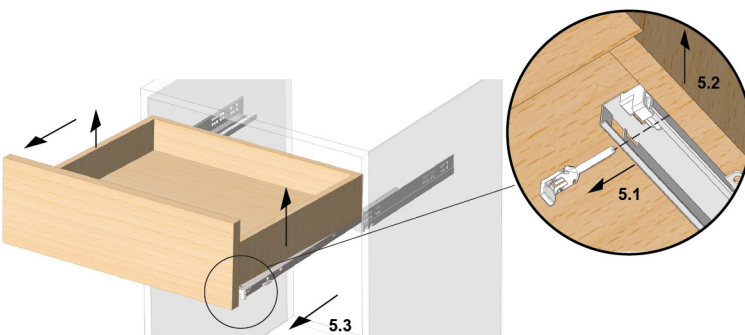

3-Fold concealed drawer slide(19mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 19\text{mm}$.
 - Adjustable opening and closing strength: +25%
- Full extension, bolt front fixing, easy height adjustment, economical solution for industry.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH5221 bear the synchronized system function.


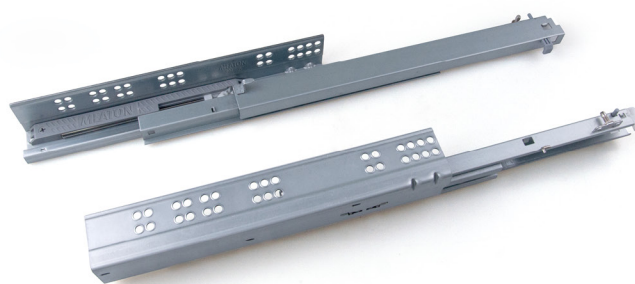


Length	Item No. DY5221	Item No. DH5221
	Soft-closing	Synchronized
240mm	522.340.030	522.340.070
260mm	522.340.031	522.340.071
290mm	522.340.032	522.340.072
340mm	522.340.033	522.340.073
390mm	522.340.034	522.340.074
440mm	522.340.035	522.340.075
490mm	522.340.036	522.340.076
540mm	522.340.037	522.340.077
590mm	522.340.038	522.340.078


Installation dimensions

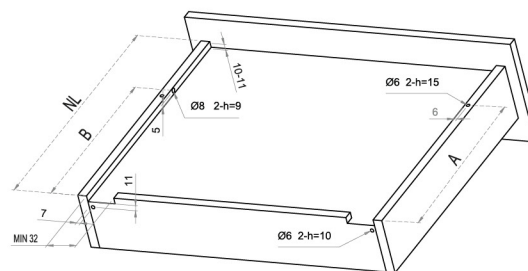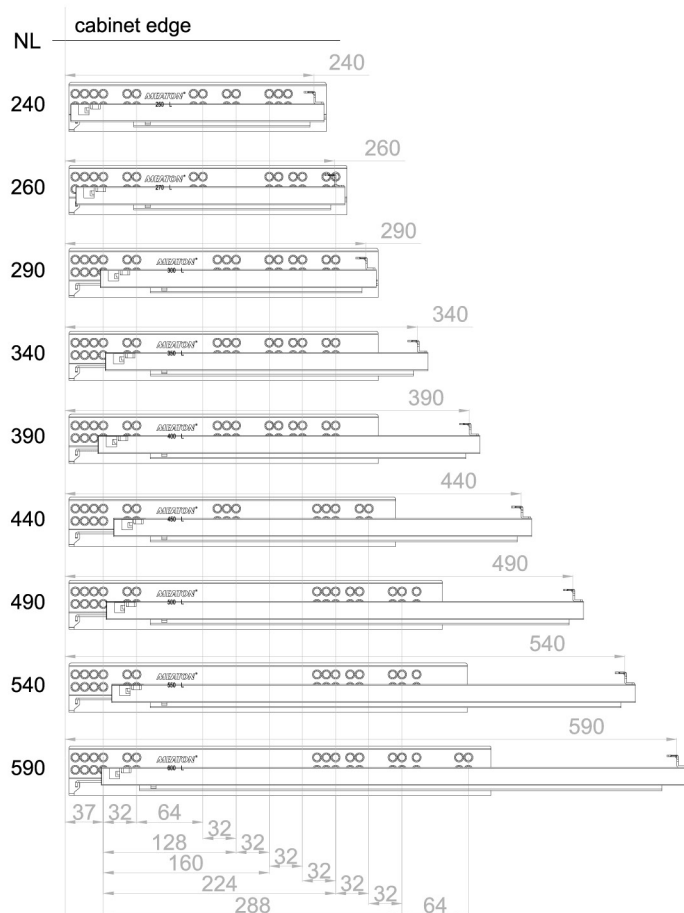

NL	240	260	290	340	390	440	490	540	590
A	190	205	245	270	305	330	355	390	415
B	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5

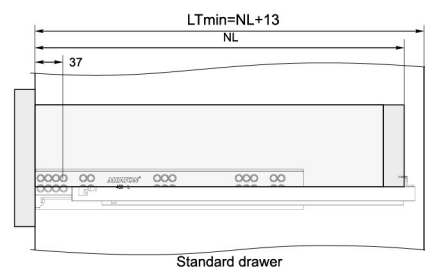
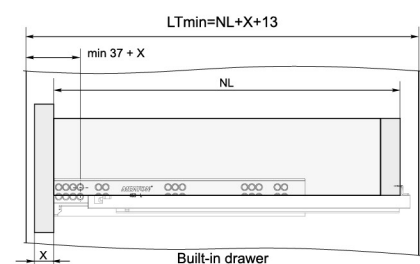


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness



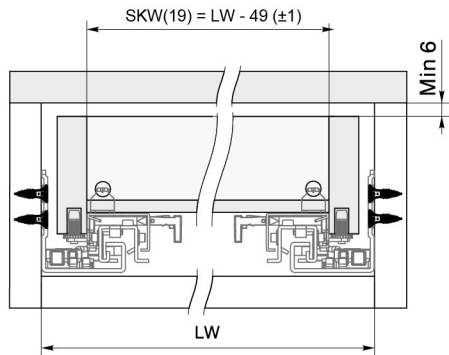
DY5221&DH5221 3-Fold concealed drawer slide(19mm with bolt locking)


LW - Cabinet inner width



SKW(19) - Drawer inner width(≤19mm drawer side thickness)

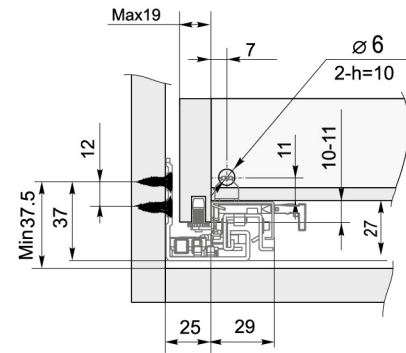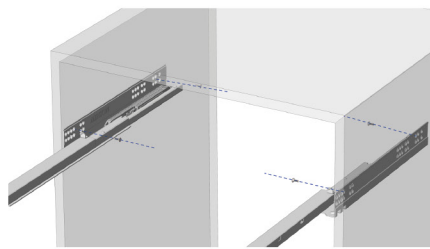
1. Install the slides on the cabinet

2. Set the drawer on the slides

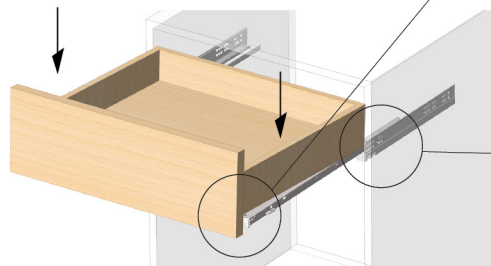
- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

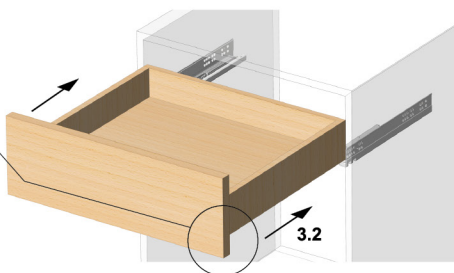

- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer


4. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

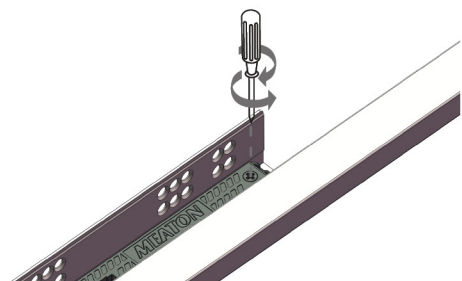
5. Disassembly of the drawer

- 5.1 Take out the plastic pin to separate the drawer from the slides
- 5.2 Take up the drawer
- 5.3 Draw out the drawer

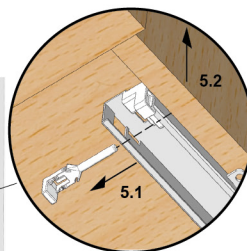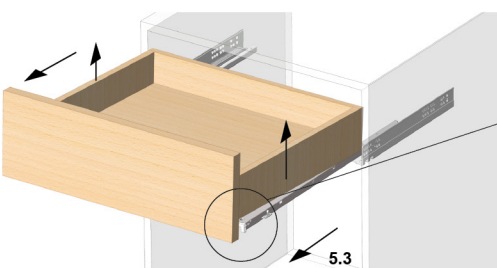

3-Fold concealed drawer slide(16mm with handle)

Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
 - Adjustable opening and closing strength: +25%
-
- Full extension, handle front fixing device, easy height adjustment.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH3331 bear the synchronized system function.





PN with this handle DY3305&DH3305


PN with this handle DY3331&DH3331

Length	Item No. DY3331	Item No. DH3331
	Soft-closing	Synchronized
250mm	522.310.000	522.310.040
270mm	522.310.001	522.310.041
300mm	522.310.002	522.310.042
350mm	522.310.003	522.310.043
400mm	522.310.004	522.310.044
450mm	522.310.005	522.310.045
500mm	522.310.006	522.310.046
550mm	522.310.007	522.310.047
600mm	522.310.008	522.310.048

Installation dimensions

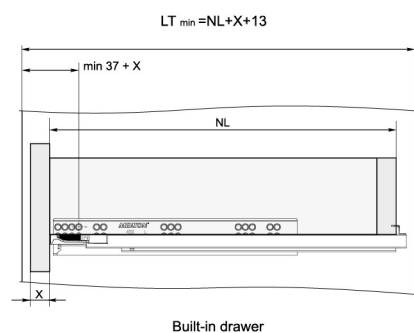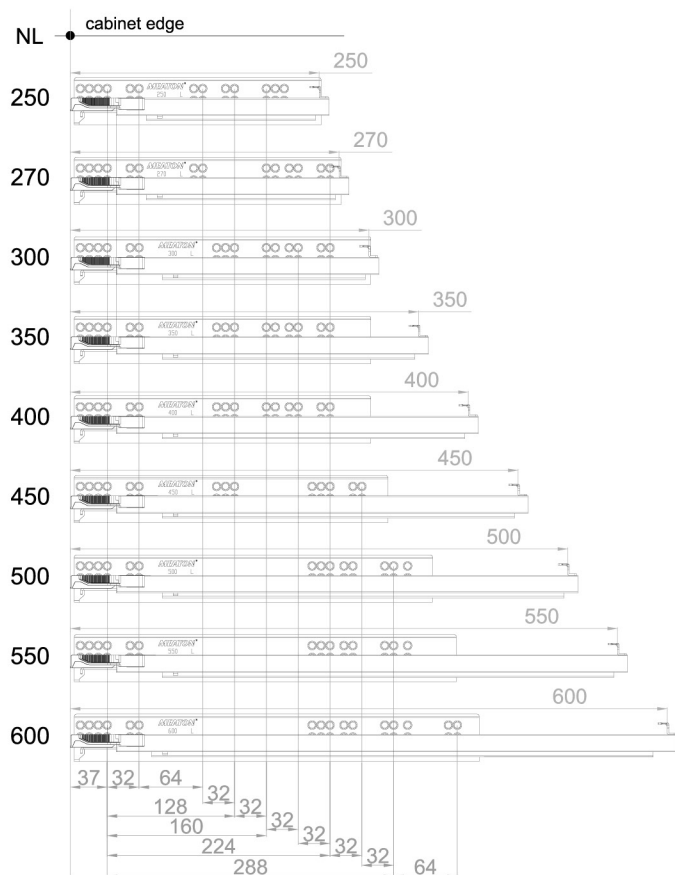

Built-in drawer

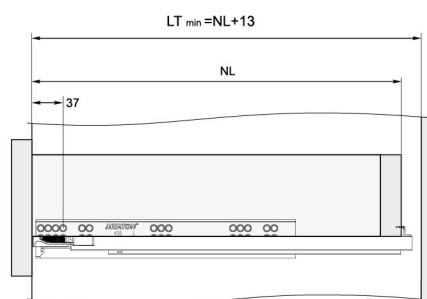


Standard drawer

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

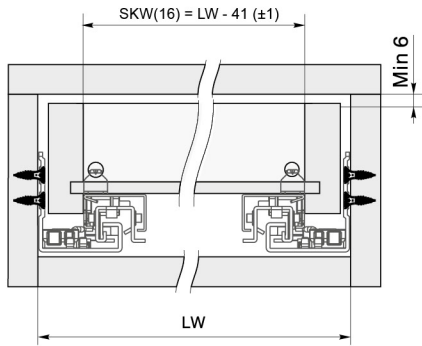DY3331&DH3331 3-Fold concealed drawer slide(16mm with handle)


LW - Cabinet inner width




SKW(16) - Drawer inner width(≤16mm drawer side thickness)

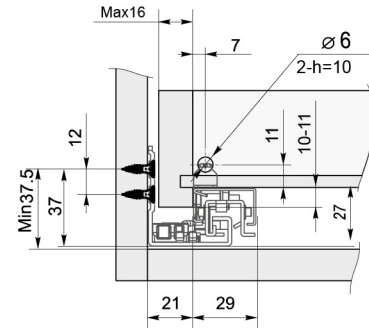

1. Install the slides on the cabinet



2. Install left/ right handle in the front of the drawer

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

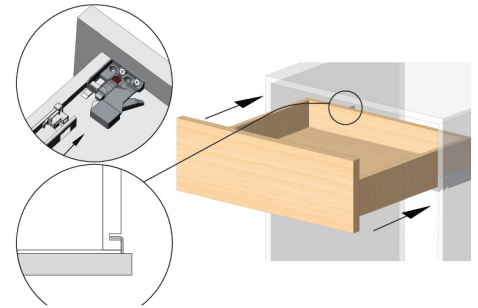
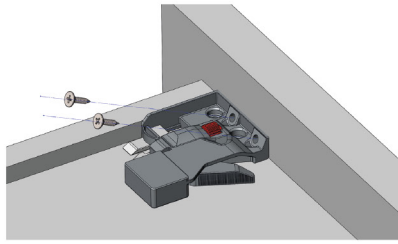
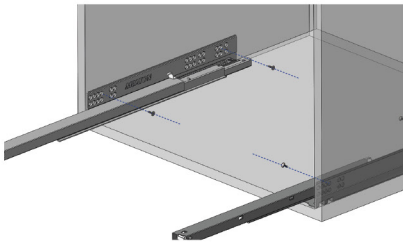


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

5. Adjustable opening and closing mechanism:
When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

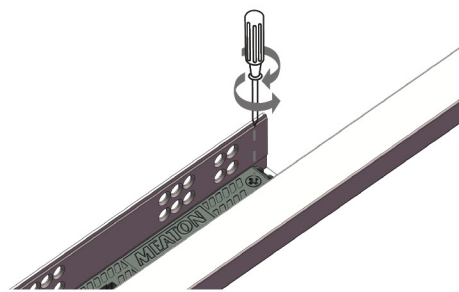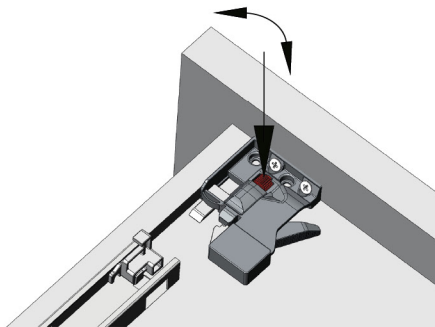

6. Push the handle lever to unlock the drawer, then pull out the drawer

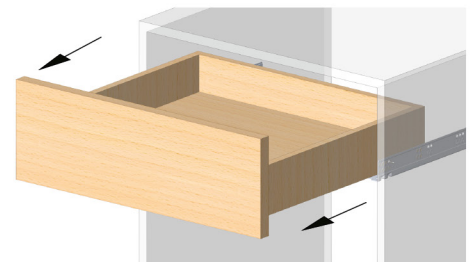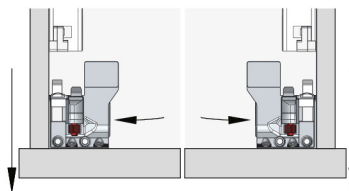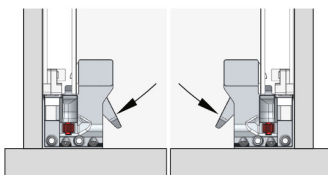

3-Fold concealed drawer slide(19mm with handle)

Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 19\text{mm}$.
 - Adjustable opening and closing strength: +25%
-
- Full extension, handle front fixing device, easy height adjustment.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH5331 bear the synchronized system function.





PN with this handle DY5305&DH5305


PN with this handle DY5331&DH5331

Length	Item No. DY5331	Item No. DH5331
	Soft-closing	Synchronized
250mm	522.310.020	522.310.060
270mm	522.310.021	522.310.061
300mm	522.310.022	522.310.062
350mm	522.310.023	522.310.063
400mm	522.310.024	522.310.064
450mm	522.310.025	522.310.065
500mm	522.310.026	522.310.066
550mm	522.310.027	522.310.067
600mm	522.310.028	522.310.068

Installation dimensions

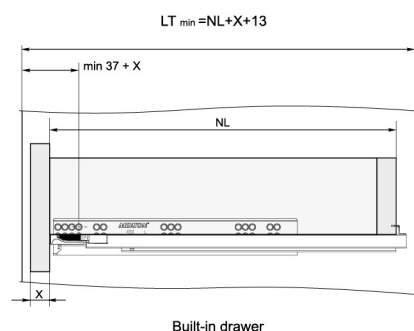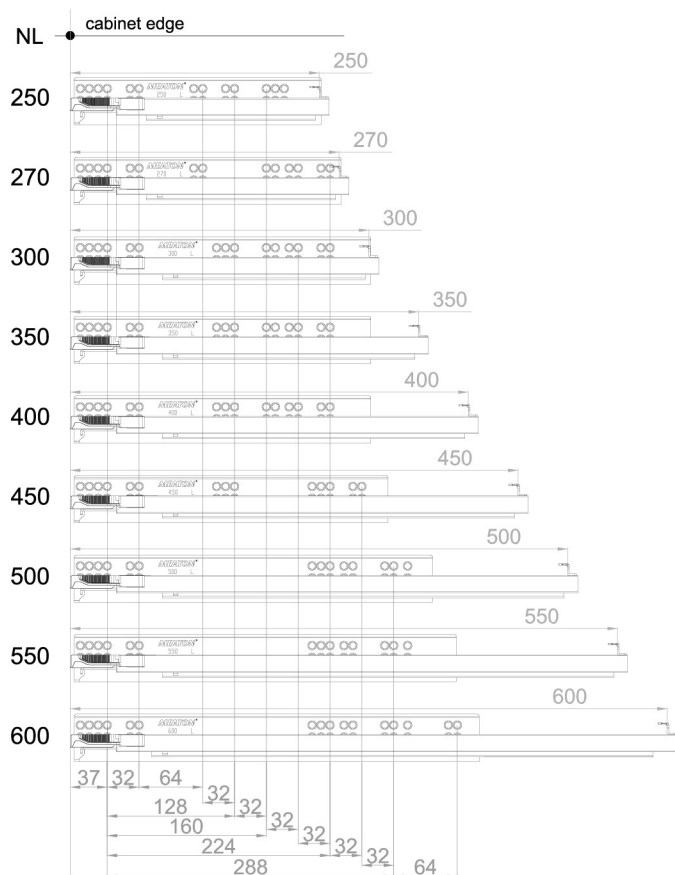

Built-in drawer


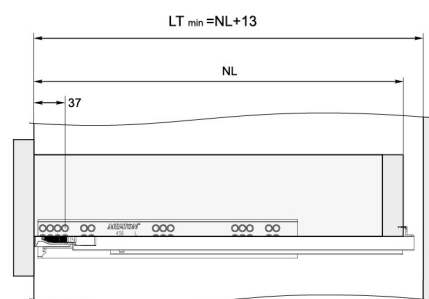


Standard drawer

LT - Cabinet inner depth

NL - Nominal slide length


X - Board thickness

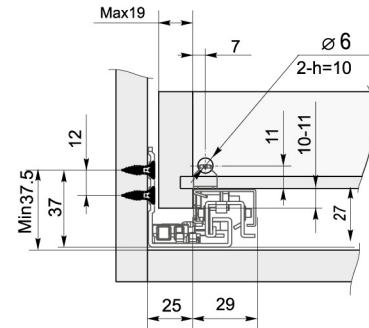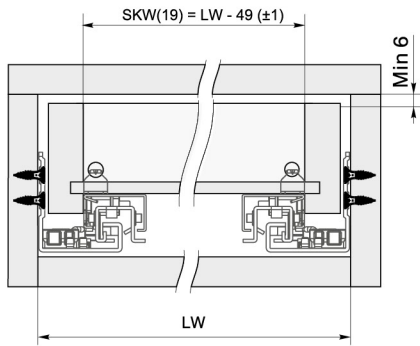DY5331&DH5331 3-Fold concealed drawer slide(19mm with handle)


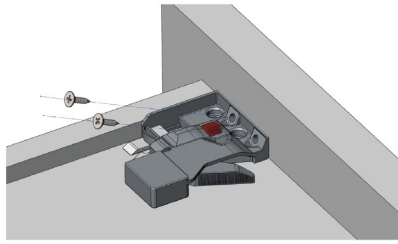
LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)


1. Install the slides on the cabinet

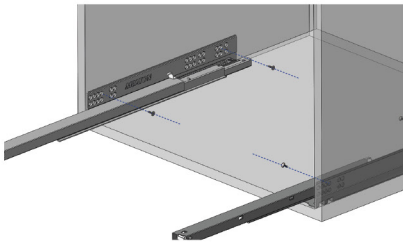


2. Install left/ right handle in the front of the drawer



3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

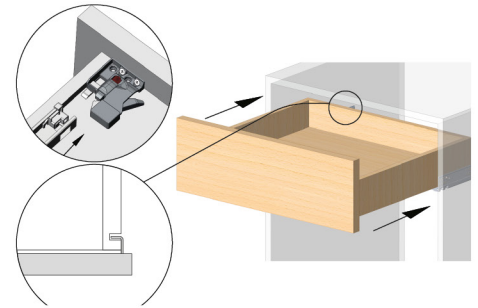


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm



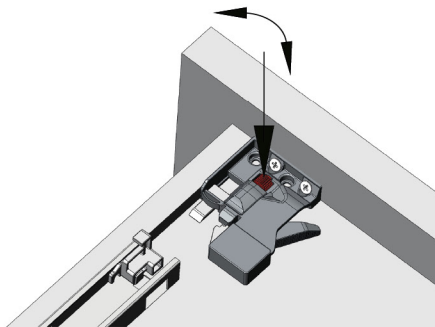


5. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

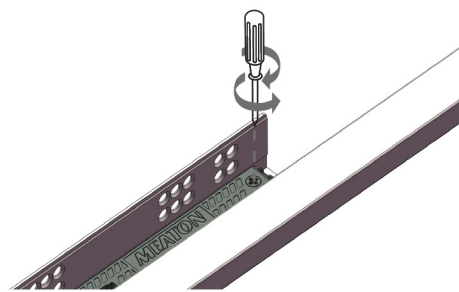

6. Push the handle lever to unlock the drawer, then pull out the drawer

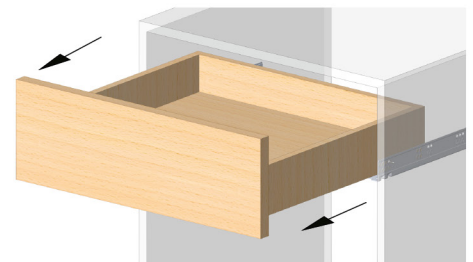

3-Fold concealed drawer slide(16mm with handle)

Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
 - Adjustable opening and closing strength: +25%
- Full extension, handle front fixing device, easy height adjustment.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH3341 bear the synchronized system function.





PN with this handle DY3325&DH3325


PN with this handle DY3341&DH3341

Length	Item No. DY3341	Item No. DH3341
	Soft-closing	Synchronized
240mm	522.310.010	522.310.050
260mm	522.310.011	522.310.051
290mm	522.310.012	522.310.052
340mm	522.310.013	522.310.053
390mm	522.310.014	522.310.054
440mm	522.310.015	522.310.055
490mm	522.310.016	522.310.056
540mm	522.310.017	522.310.057
590mm	522.310.018	522.310.058

Installation dimensions

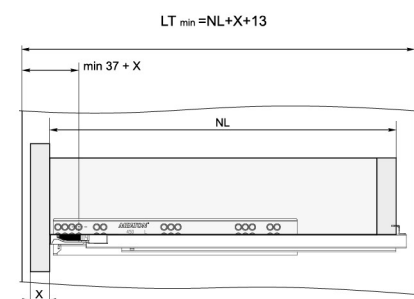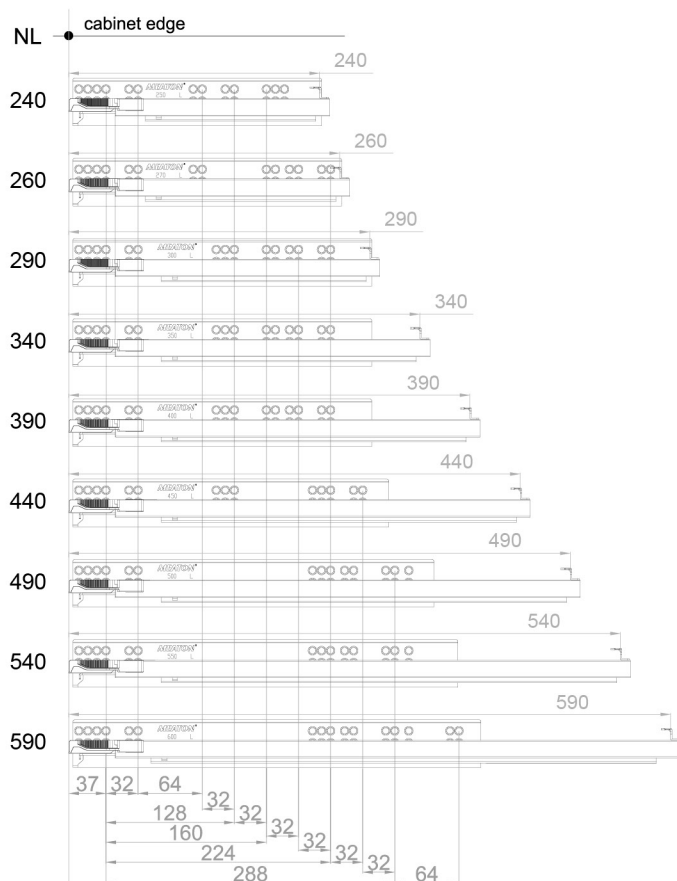

Built-in drawer

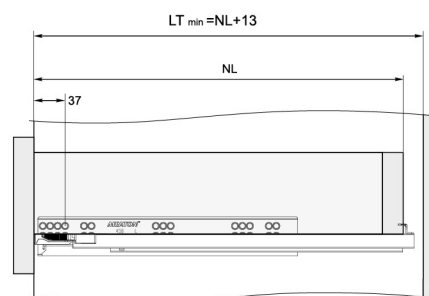


Standard drawer

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

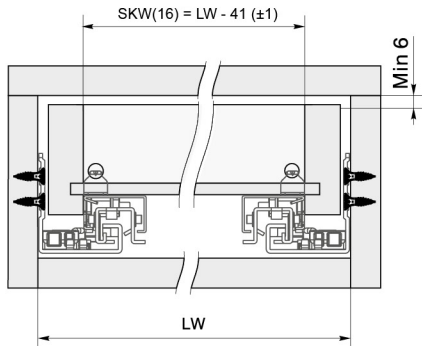DY3341&DH3341 3-Fold concealed drawer slide(16mm with handle)


LW - Cabinet inner width




SKW(16) - Drawer inner width(≤16mm drawer side thickness)

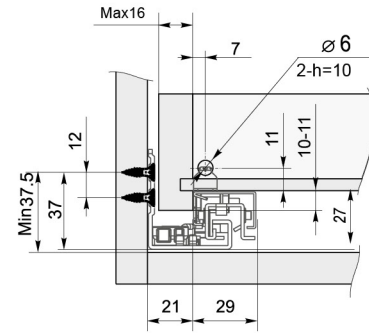

1. Install the slides on the cabinet



2. Install left/ right handle in the front of the drawer

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

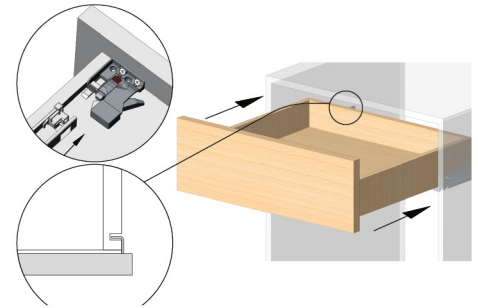
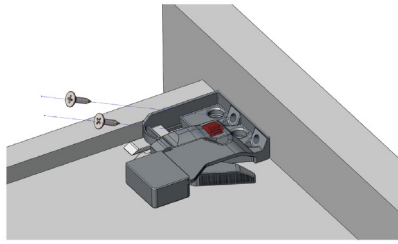
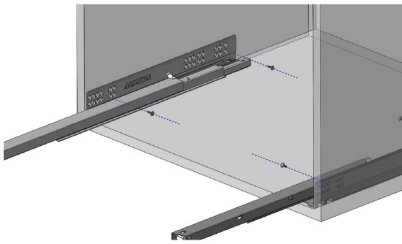


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

5. Adjustable opening and closing mechanism:
When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

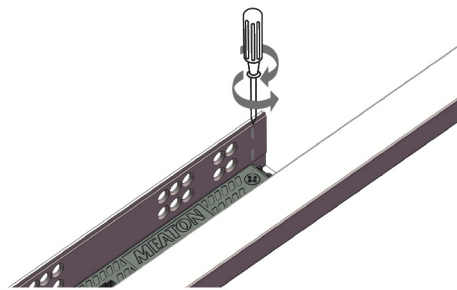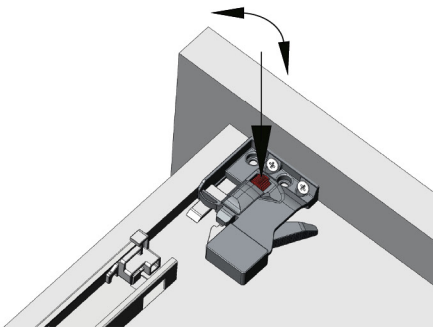

6. Push the handle lever to unlock the drawer, then pull out the drawer

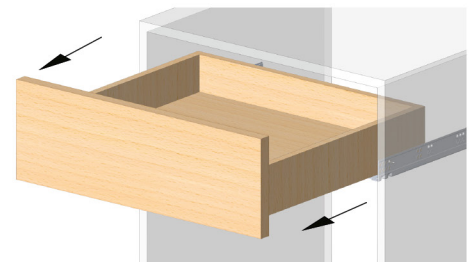

3-Fold concealed drawer slide(19mm with handle)

Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 19\text{mm}$.
 - Adjustable opening and closing strength: +25%
- Full extension, handle front fixing device, easy height adjustment.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH5341 bear the synchronized system function.





PN with this handle DY5325&DH5325


PN with this handle DY5341&DH5341

Length	Item No. DY5341	Item No. DH5341
	Soft-closing	Synchronized
240mm	522.310.030	522.310.070
260mm	522.310.031	522.310.071
290mm	522.310.032	522.310.072
340mm	522.310.033	522.310.073
390mm	522.310.034	522.310.074
440mm	522.310.035	522.310.075
490mm	522.310.036	522.310.076
540mm	522.310.037	522.310.077
590mm	522.310.038	522.310.078

Installation dimensions

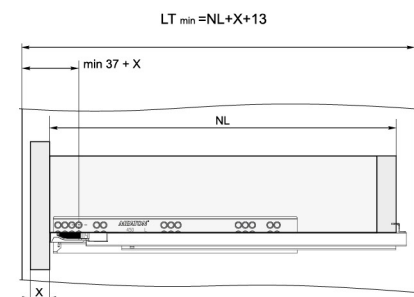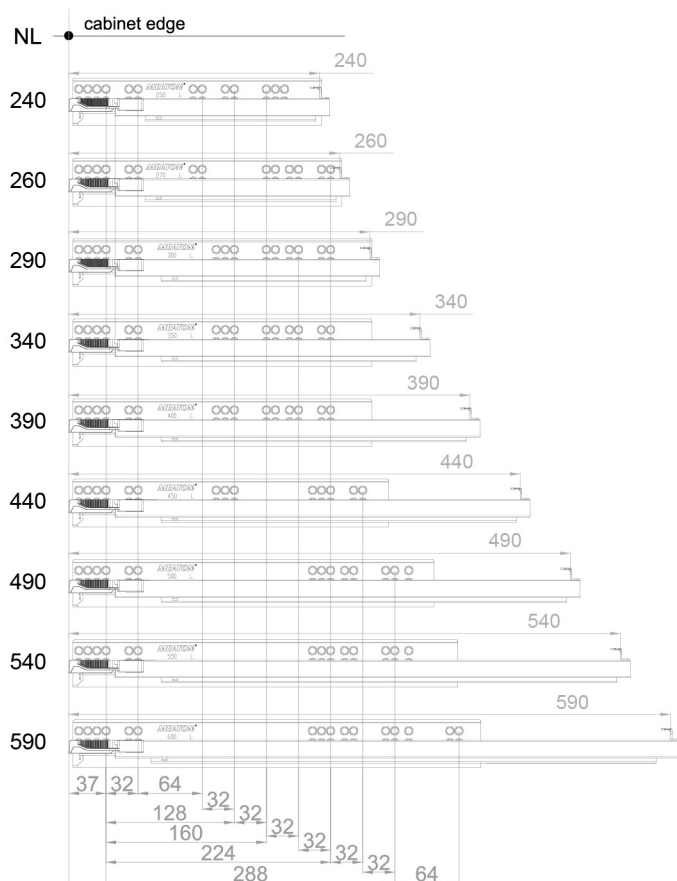

Built-in drawer


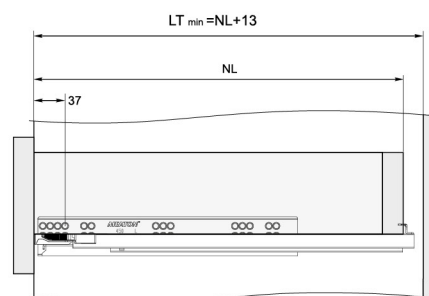


Standard drawer

LT - Cabinet inner depth

NL - Nominal slide length

X - Board thickness

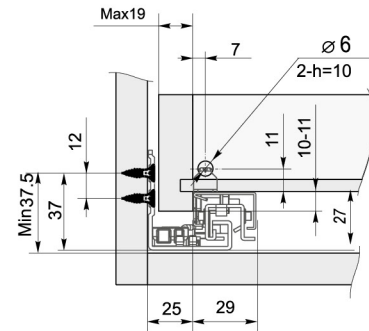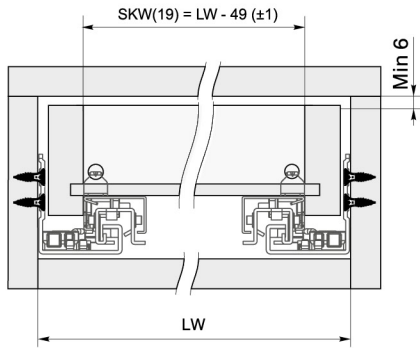DY5341&DH5341 3-Fold concealed drawer slide(19mm with handle)


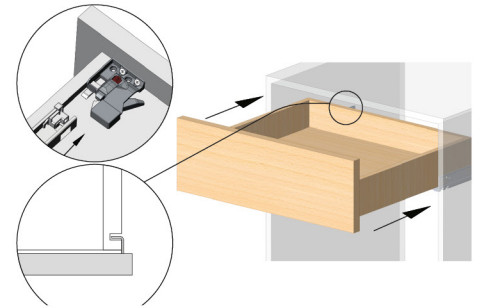
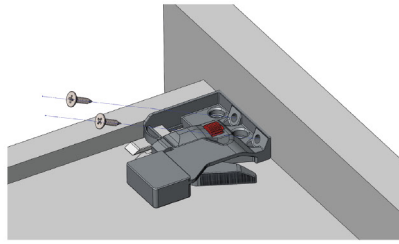
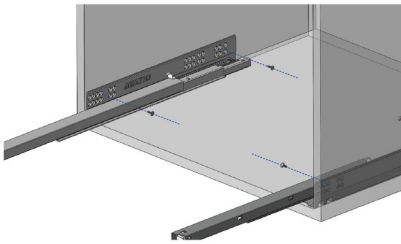
LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)

1. Install the slides on the cabinet



2. Install left/ right handle in the front of the drawer

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel






4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

5. Adjustable opening and closing mechanism:
When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

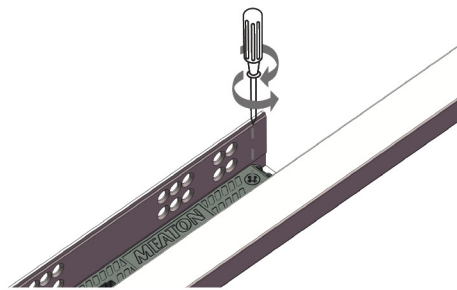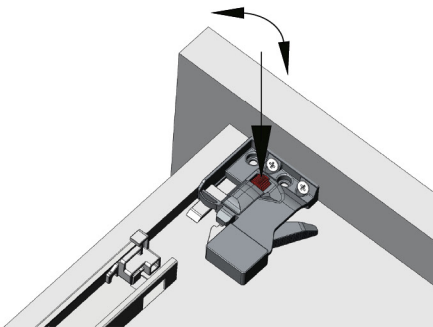

6. Push the handle lever to unlock the drawer, then pull out the drawer

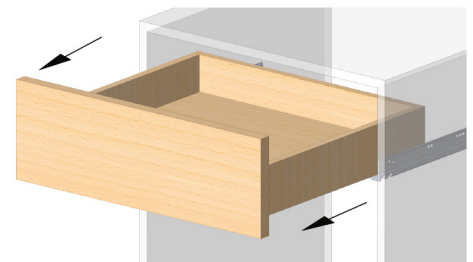

3-Fold concealed drawer slide(16mm with handle) - American type

Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 30kg.
 - Life guarantee: 50,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
 - Adjustable opening and closing strength: +25%
-
- Full extension, handle front fixing device, easy height adjustment.
 - Outstanding sliding stability.
 - Easy and safe mounting and dismounting for drawers.
 - Opening and closing strength can be adjusted with eccentric screw on the damper.
 - DH3326 bear the synchronized system function.




PN with this handle DY3317 & DH3317


PN with this handle DY3326 & DH3326

Length	Item No. DY3326	Item No. DH3326
	Soft-closing	Synchronized
305mm	522.310.080	522.310.090
381mm	522.310.081	522.310.091
457mm	522.310.082	522.310.092
533mm	522.310.083	522.310.093

Installation dimensions

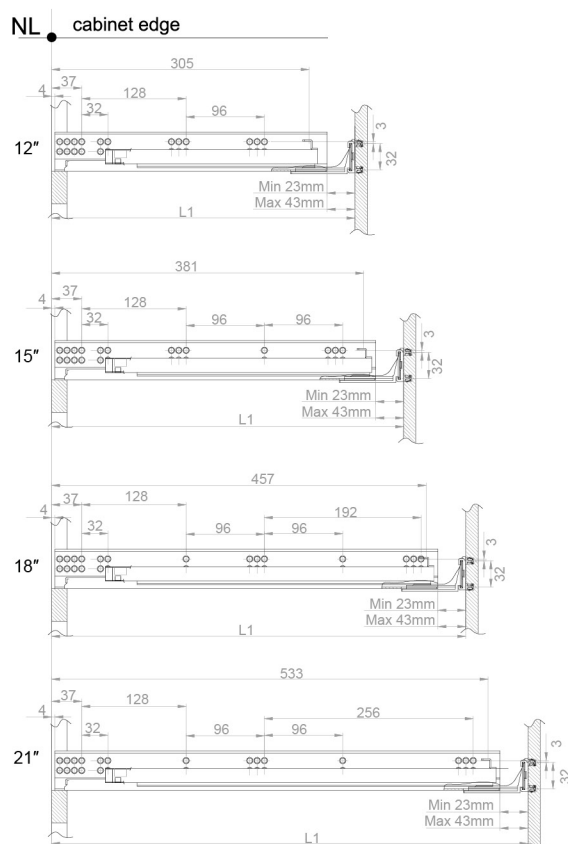


NL	NL	Min L1	Max L1
12"	305	338	358
15"	381	416	436
18"	457	494	514
21"	533	568	588

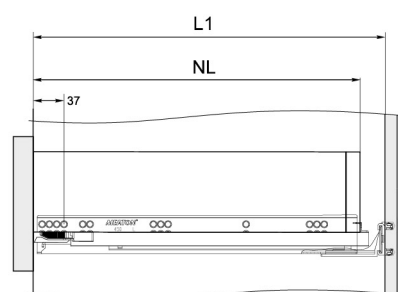

Standard drawer


NL - nominal slide length

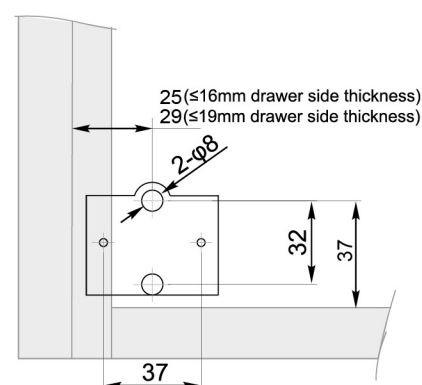

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

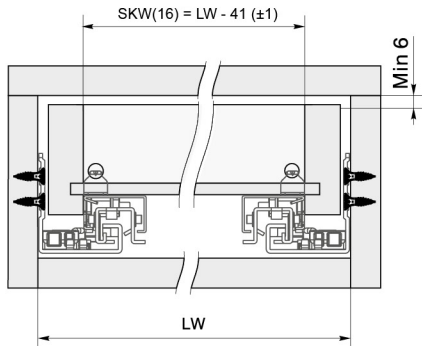
DY3326&DH3326 3-Fold concealed drawer slide(16mm with handle) - American type


LW - Cabinet inner width


SKW(16) - Drawer inner width(≤16mm drawer side thickness)

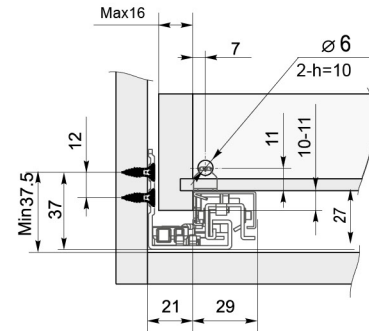


1. Install the slides on the cabinet

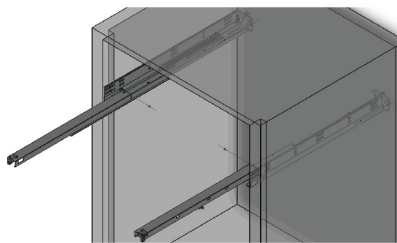


2. Install left/ right handle in the front of the drawer

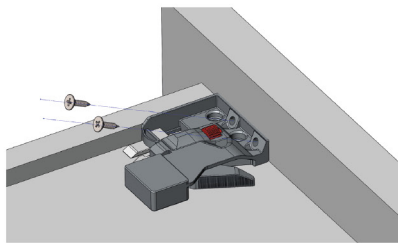

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

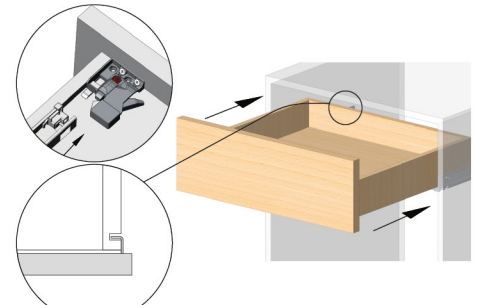


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm



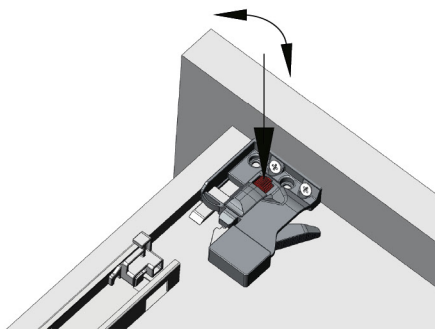


5. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

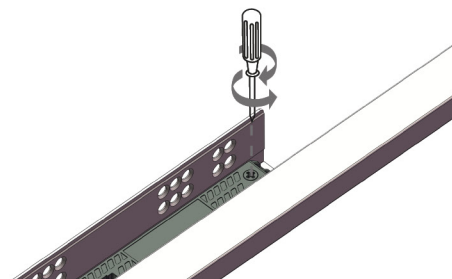

6. Push the handle lever to unlock the drawer, then pull out the drawer

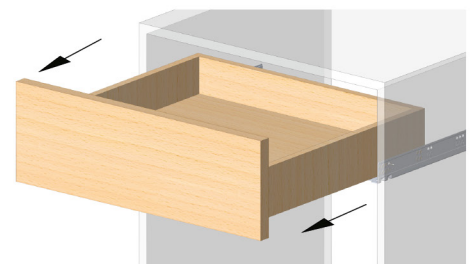

3-Fold concealed drawer slide(19mm with handle) - American type

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Thickness of board: $\leq 19\text{mm}$.
- Adjustable opening and closing strength: +25%
- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- Opening and closing strength can be adjusted with eccentric screw on the damper.
- DH5326 bear the synchronized system function.




PN with this handle DY5317&DH5317


PN with this handle DY5326&DH5326

Length	Item No. DY5326	Item No. DH5326
	Soft-closing	Synchronized
305mm	522.310.100	522.310.110
381mm	522.310.101	522.310.111
457mm	522.310.102	522.310.112
533mm	522.310.103	522.310.113

Installation dimensions

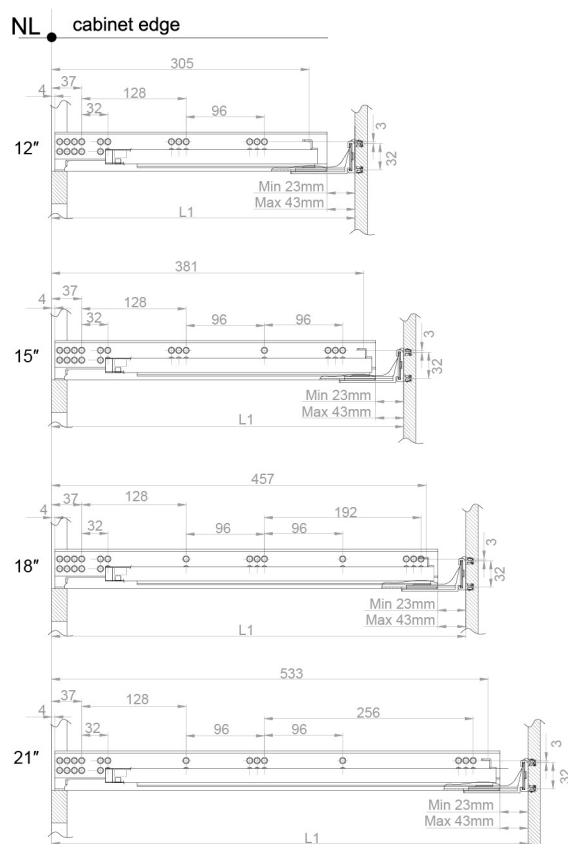


NL	NL	Min L1	Max L1
12"	305	338	358
15"	381	416	436
18"	457	494	514
21"	533	568	588

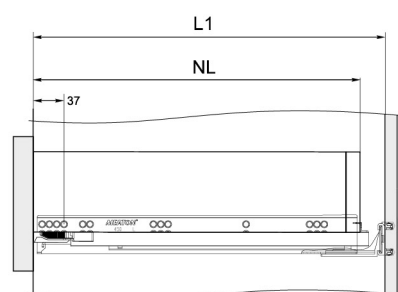

Standard drawer


NL - nominal slide length

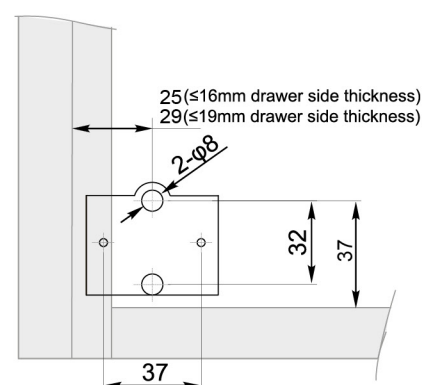

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

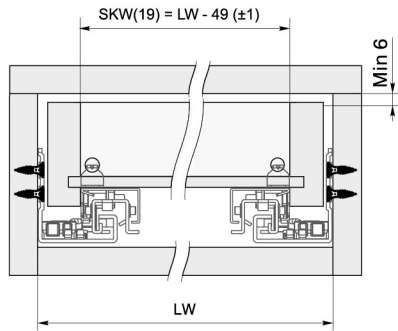
DY5326&DH5326 3-Fold concealed drawer slide(19mm with handle) - American type


LW - Cabinet inner width


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

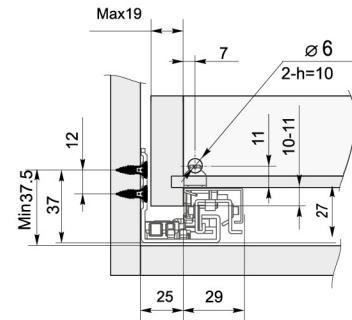


1. Install the slides on the cabinet

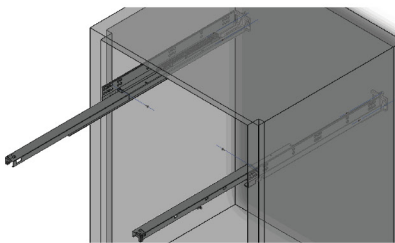


2. Install left/ right handle in the front of the drawer

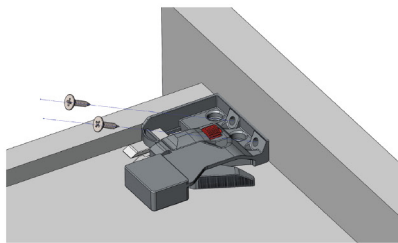

3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

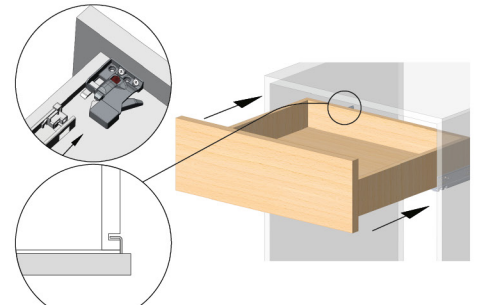


4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm



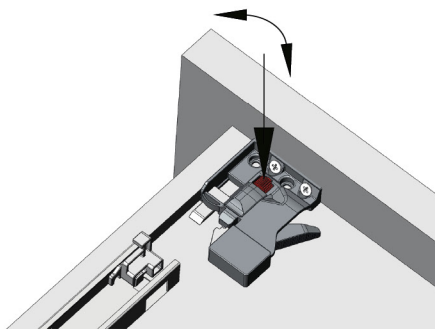


5. Adjustable opening and closing mechanism:

When the drawer takes more than 25kg, adjust the eccentric screw on the damper, max 25% more strength will be applied, so that make the movement smooth.

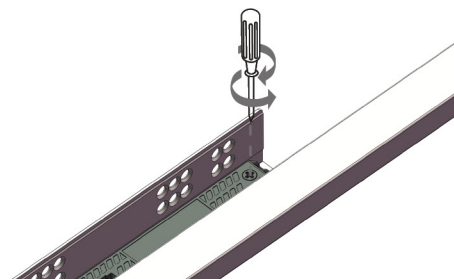


6. Push the handle lever to unlock the drawer, then pull out the drawer

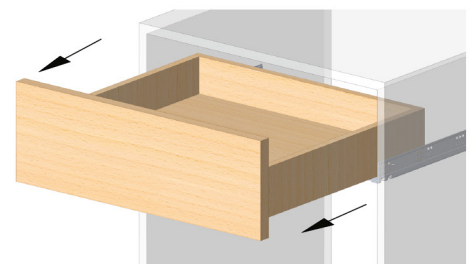

2-Fold light concealed drawer slider (16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 20kg.
- Life guarantee: 40,000 cycles.
- Thickness of board: $\leq 16\text{mm}$.
- Partial extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
- Excellent stability and silence effect.
- Special installation method to meet the needs of specific customer installation habits.
- Gently opening and closing for comfortable lifestyle.

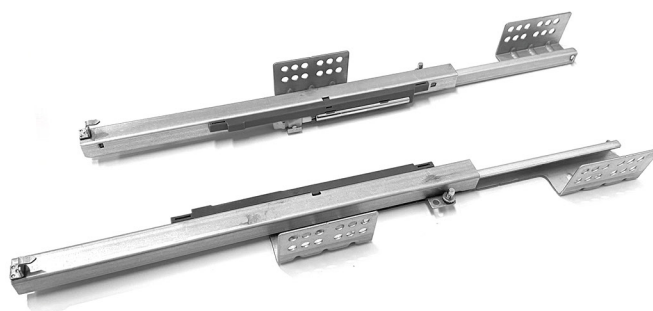


Length	Item No. DY6201
	Soft-closing
250mm	522.240.040
300mm	522.240.042
350mm	522.240.043
400mm	522.240.044
450mm	522.240.045
500mm	522.240.046


Installation dimensions

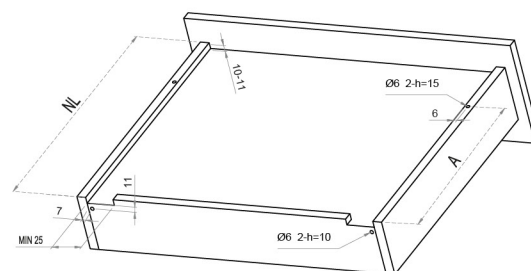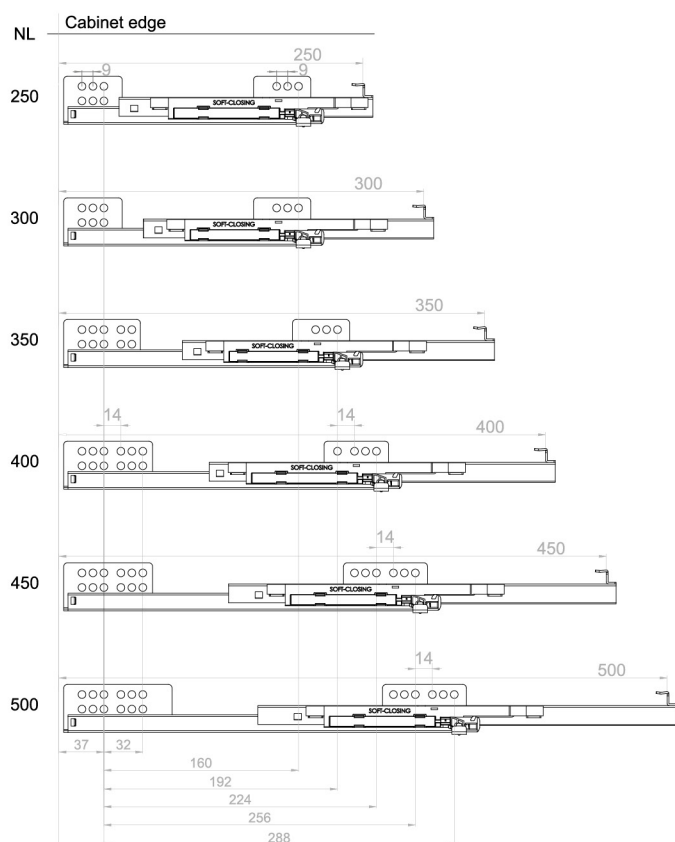

NL	250	300	350	400	450	500
A	188.5	188.5	221.5	249.5	283.5	309.5

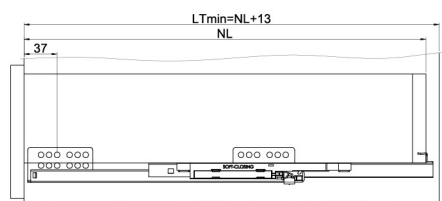


Standard drawer

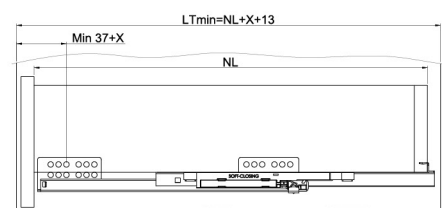


Built-in drawer

LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

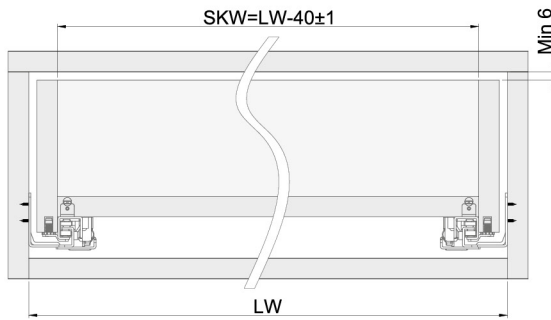
DY6201 2-Fold light concealed drawer slider (16mm with bolt locking)


LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)

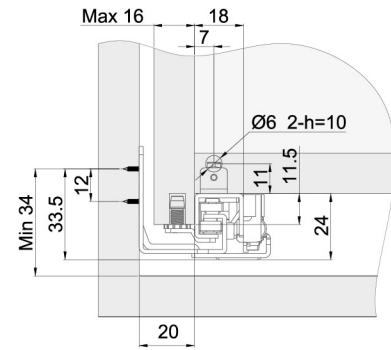

1. Insert the slides into the cabinet

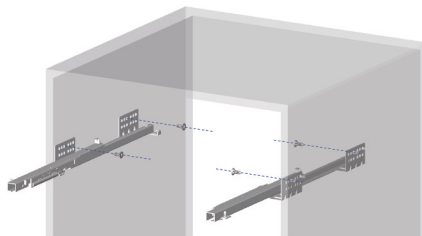


2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall


2.3 Adjust the left / right screw to make the drawer horizontal

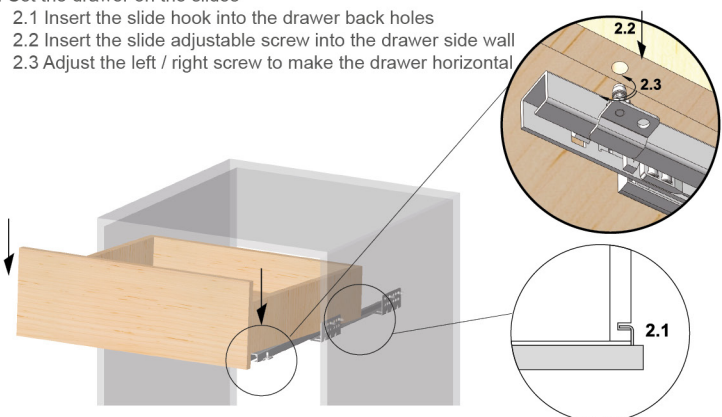

3. Fixing the drawer and slides

3.1 Insert the tapping screws into the corresponding holes on the left / right slides and tap into the drawer

3.2 Close the drawer

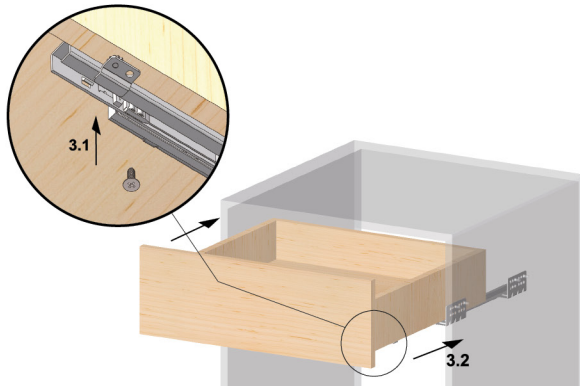


4. Disassembly of the drawer

4.1 Take out the tapping screw to separate the drawer from the slides

4.2 Take up the drawer


4.3 Draw out the drawer

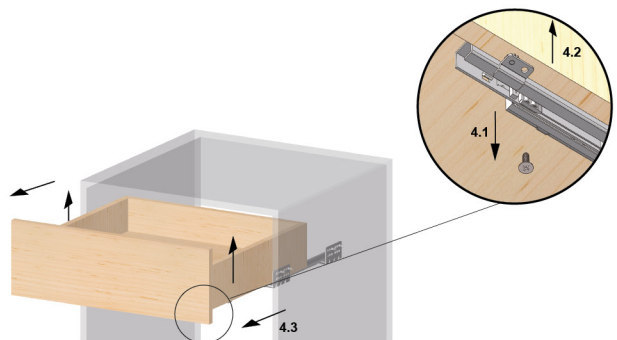

2-Fold light concealed drawer slider (16mm with handle)




Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 20kg.
 - Life guarantee: 40,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
-
- Partial extension, handle front fixing device, easy height adjustment, make an economical solution for industry.
 - Excellent stability and silence effect.
 - Special installation method to meet the needs of specific customer installation habits.
 - Gently opening and closing for comfortable lifestyle.

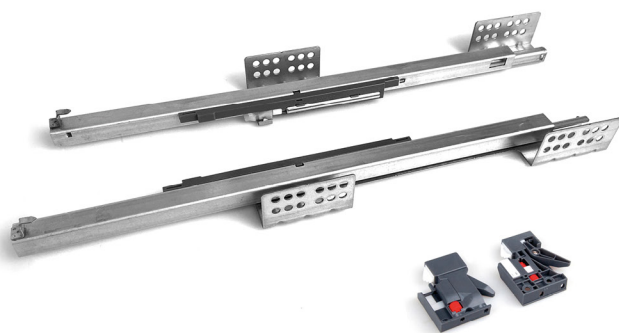



Length	Item No. DY6331
	Soft-closing
250mm	522.210.040
300mm	522.210.042
350mm	522.210.043
400mm	522.210.044
450mm	522.210.045
500mm	522.210.046

Installation dimensions

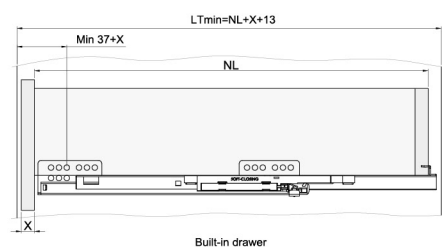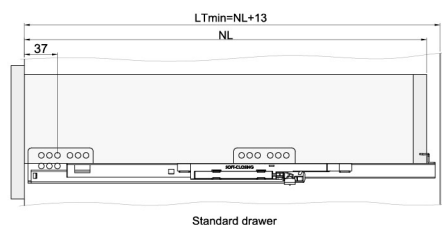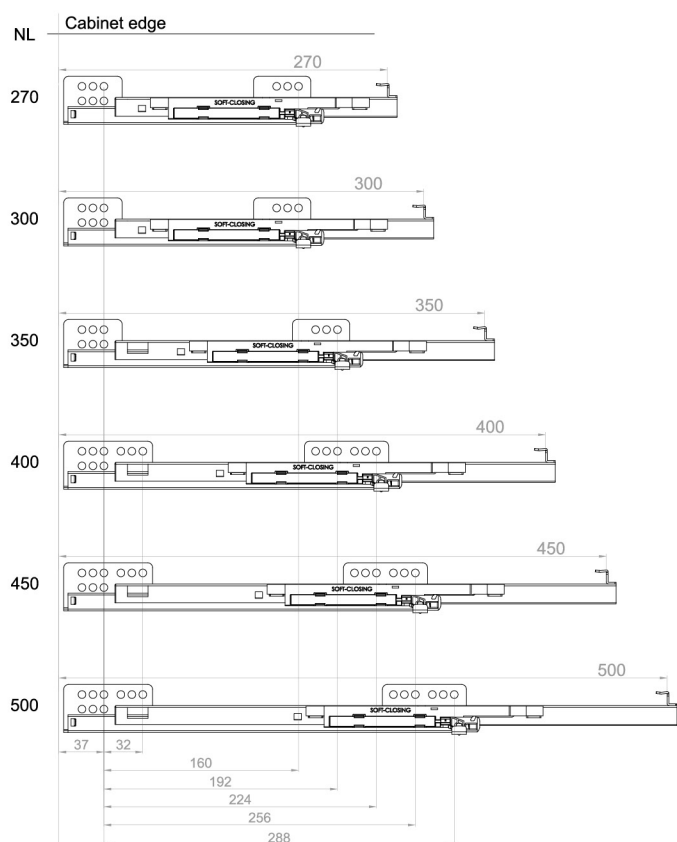

LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

DY6331 2-Fold light concealed drawer slider (16mm with handle)

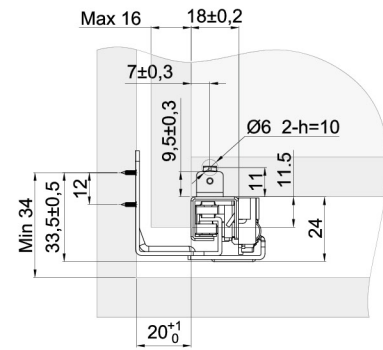
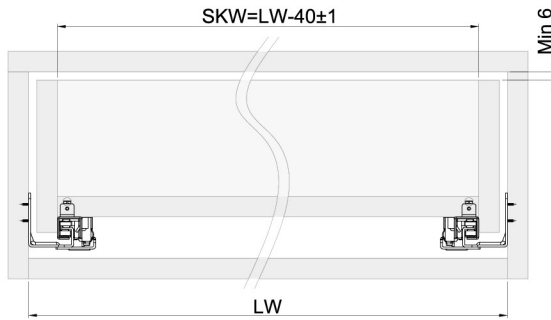


LW - Cabinet inner width

SKW(19) - Drawer inner width(≤ 19 mm drawer side thickness)



1. Install the slides on the cabinet

2. Install left/ right handle in the front of the drawer

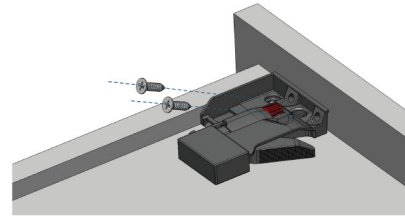
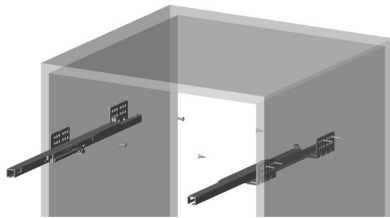


3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

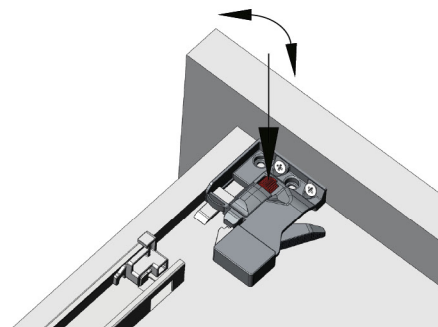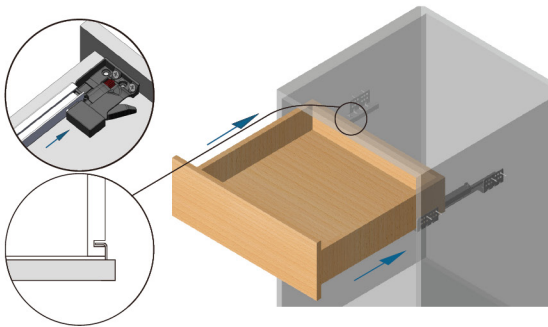


6. Push the handle lever to unlock the drawer, then pull out the drawer

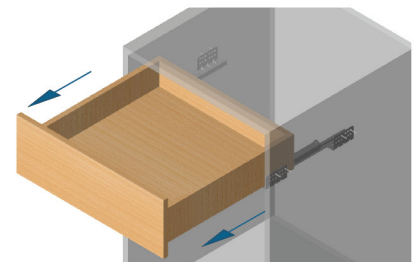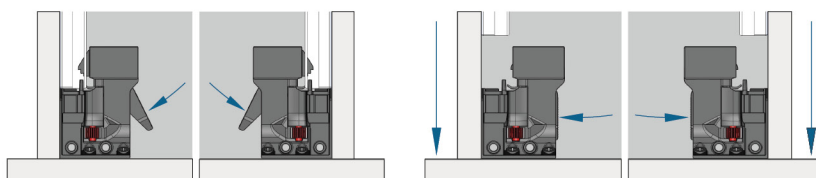

2-Fold concealed drawer slide(with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: DP2201: $\leq 16\text{mm}$
DP4201: $\leq 19\text{mm}$
- Partial extension, bolt front fixing, easy height adjustment, economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.

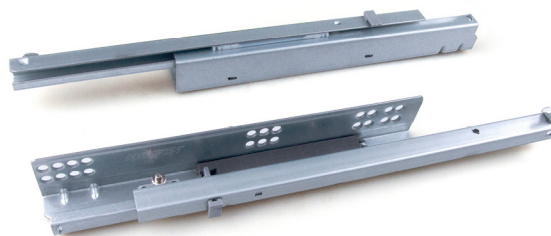


Length	Item No. DP2201	Item No. DP4201
	16mm with bolt	19mm with bolt
250mm	523.240.000	523.240.020
270mm	523.240.001	523.240.021
300mm	523.240.002	523.240.022
350mm	523.240.003	523.240.023
400mm	523.240.004	523.240.024
450mm	523.240.005	523.240.025
500mm	523.240.006	523.240.026
550mm	523.240.007	523.240.027
600mm	523.240.008	523.240.028


Installation dimensions

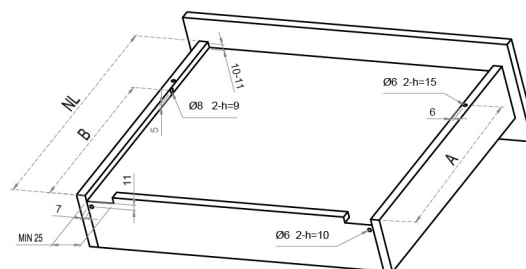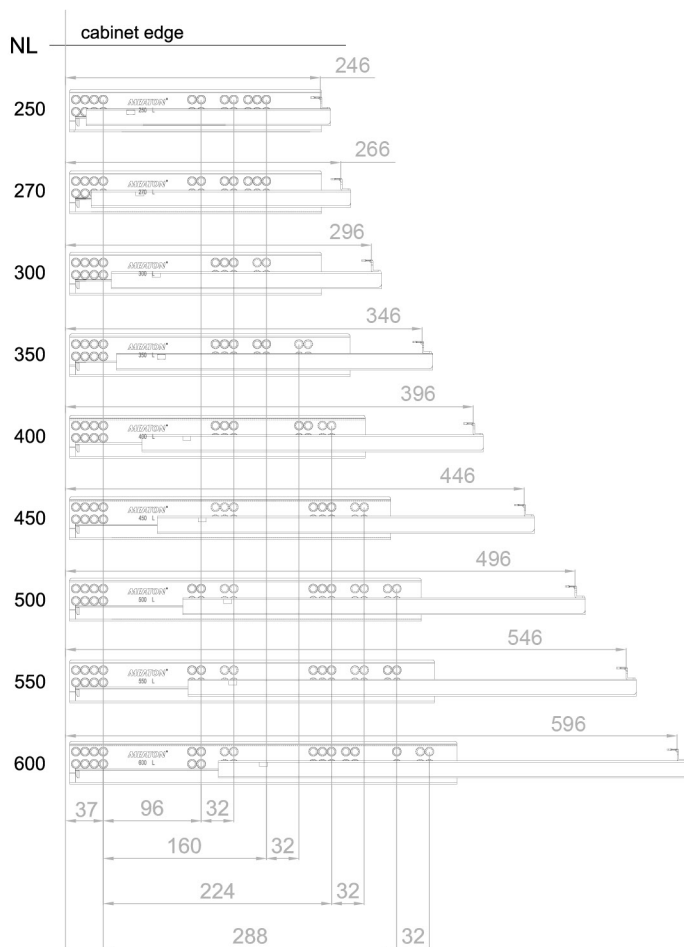

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	186	201	211	256	281	316	341	386	406

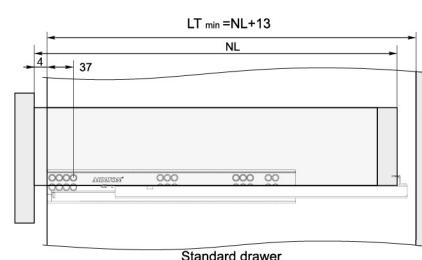


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

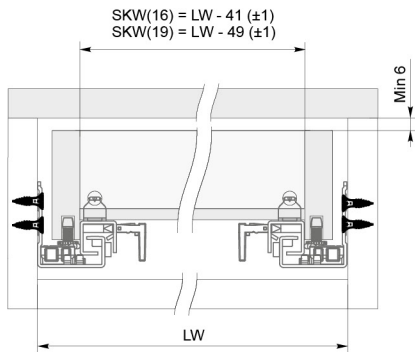DP2201 & DP4201 2-Fold concealed push-open drawer slide(with bolt locking)


LW - Cabinet inner width


SKW(16) - Drawer inner width(≤16mm drawer side thickness)

SKW(19) - Drawer inner width(≤19mm drawer side thickness)

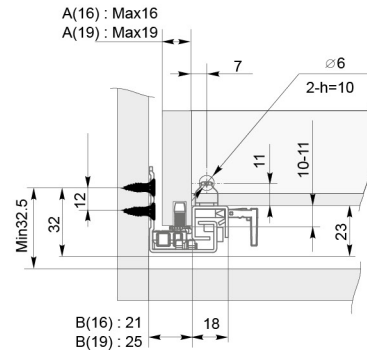

A(16) Be used for slide rails with a drawer side
A(19) thickness no thinner than 16mm.





B(16) Be used for slide rails with a drawer side
B(19) thickness no thinner than 19mm.

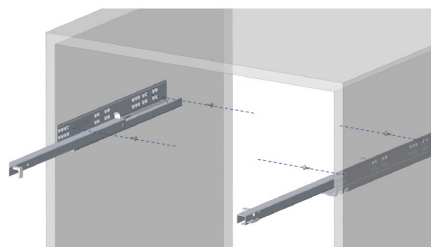1. Install the slides on the cabinet

2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall

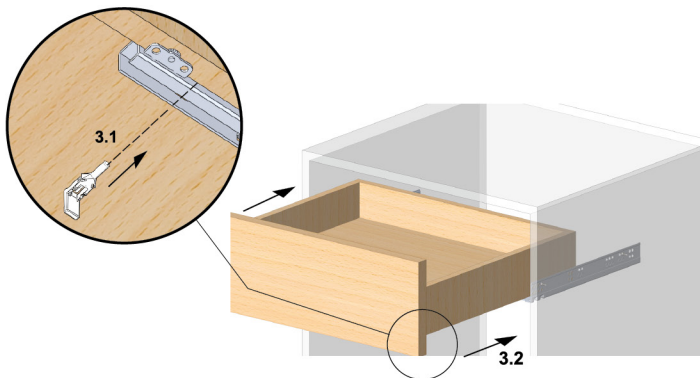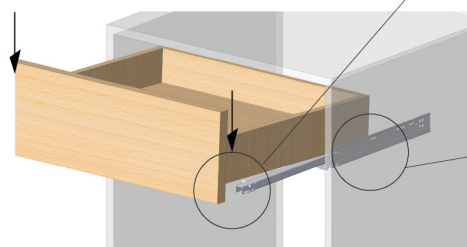2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

3.1 insert the left/right plastic pins into the pre-drilled
holes on the drawer side walls


3.2 Close the drawer

4. Disassembly of the drawer

4.1 Take out the plastic pin to separate the drawer from the slides

4.2 Take up the drawer


4.3 Draw out the drawer

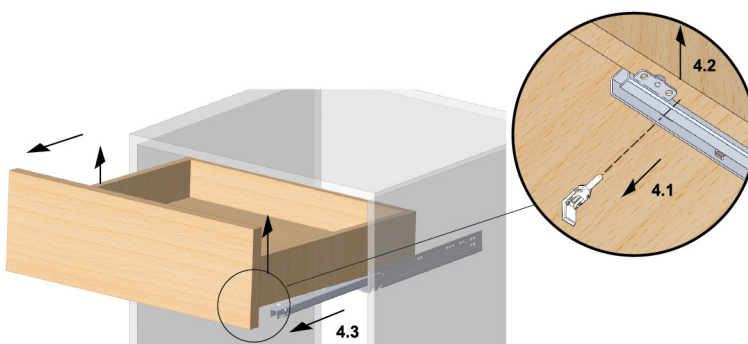

2-Fold concealed drawer slide (with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: DP2221: $\leq 16\text{mm}$
DP4221: $\leq 19\text{mm}$
- Partial extension, bolt front fixing, easy height adjustment, economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.

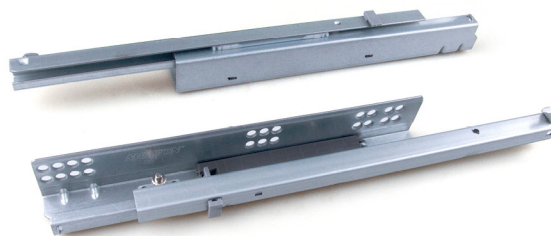


Length	Item No. DP2221	Item No. DP4221
	16mm with bolt	19mm with bolt
240mm	523.240.010	523.240.030
260mm	523.240.011	523.240.031
290mm	523.240.012	523.240.032
340mm	523.240.013	523.240.033
390mm	523.240.014	523.240.034
440mm	523.240.015	523.240.035
490mm	523.240.016	523.240.036
540mm	523.240.017	523.240.037
590mm	523.240.018	523.240.038


Installation dimensions

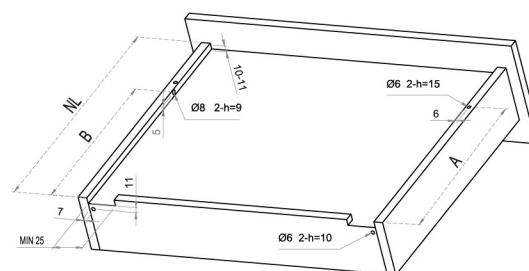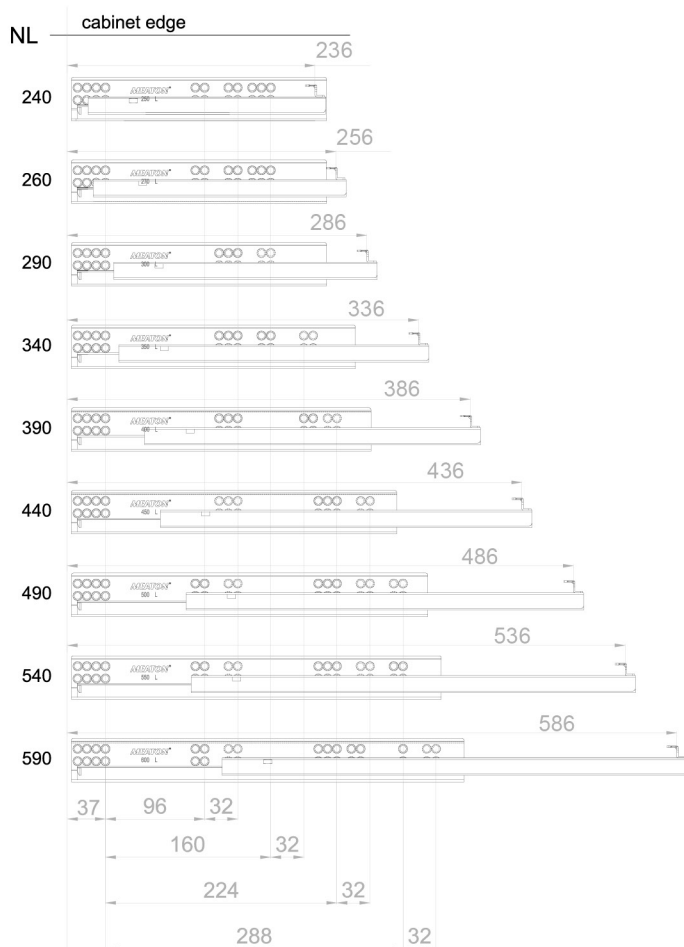

NL	240	260	290	340	390	440	490	540	590
A	220	230	245	270	305	330	355	390	415
B	188	198	213	238	273	298	323	358	383

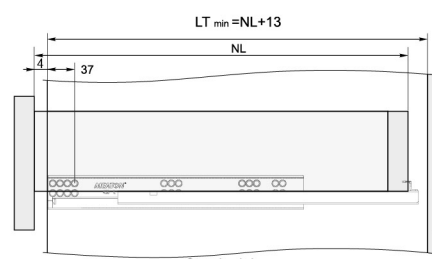


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

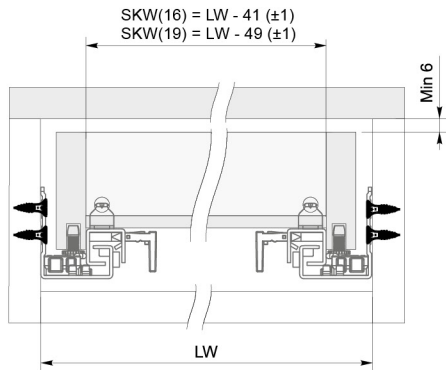DP2221 & DP4221 2-Fold concealed push-open drawer slide (with bolt locking)


SKW(16) - Drawer inner width (≤16mm drawer side thickness)


SKW(19) - Drawer inner width (≤19mm drawer side thickness)

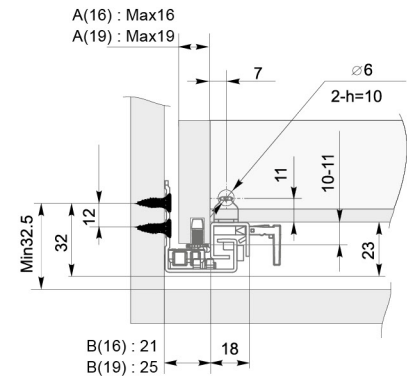




A(16) Be used for slide rails with a drawer side thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side thickness no thinner than 16mm.


B(19) thickness no thinner than 19mm.

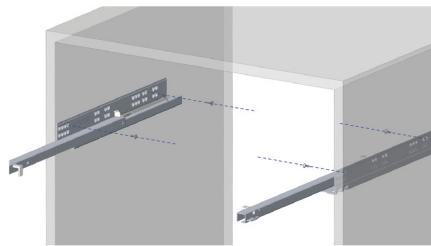1. Install the slides on the cabinet

2. Set the drawer on the slides

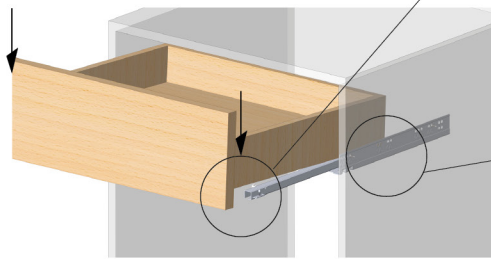
- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

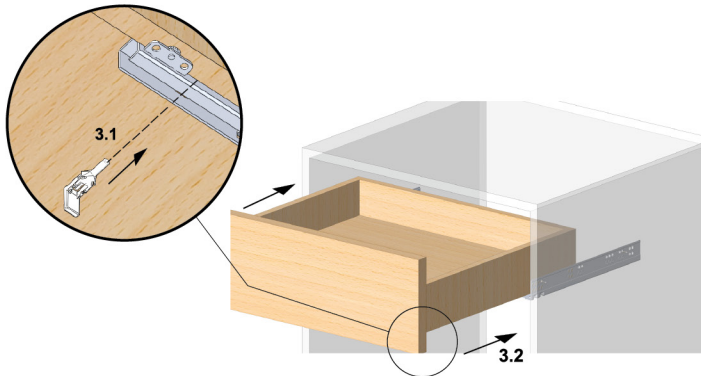- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer


4. Disassembly of the drawer


- 4.1 Take out the plastic pin to separate the drawer from the slides
- 4.2 Take up the drawer
- 4.3 Draw out the drawer

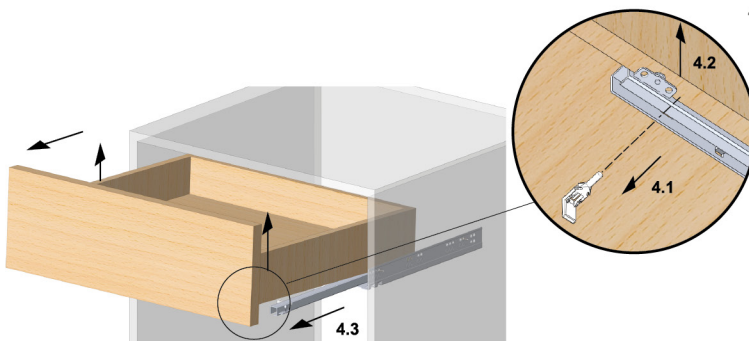

2-Fold concealed drawer slide(with handle)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: DP2331: ≤16mm
DP4331: ≤19mm
- Partial extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.

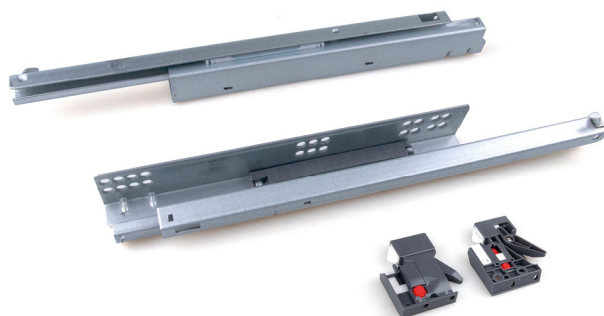


Length	Item No. DP2331	Item No. DP4331
	16mm with handle	19mm with handle
250mm	523.210.000	523.210.020
270mm	523.210.001	523.210.021
300mm	523.210.002	523.210.022
350mm	523.210.003	523.210.023
400mm	523.210.004	523.210.024
450mm	523.210.005	523.210.025
500mm	523.210.006	523.210.026
550mm	523.210.007	523.210.027
600mm	523.210.008	523.210.028

Installation dimensions

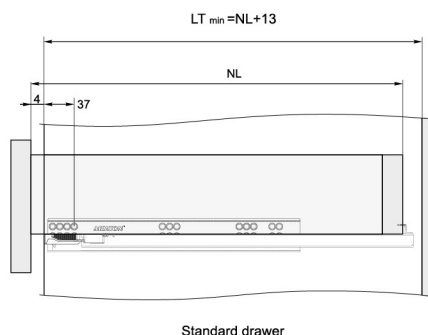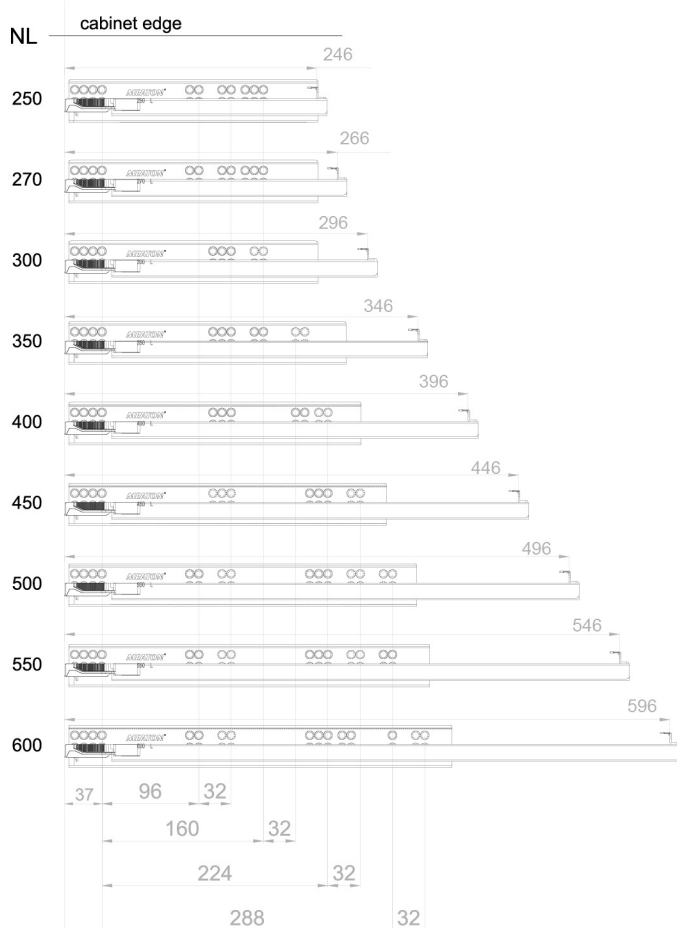


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

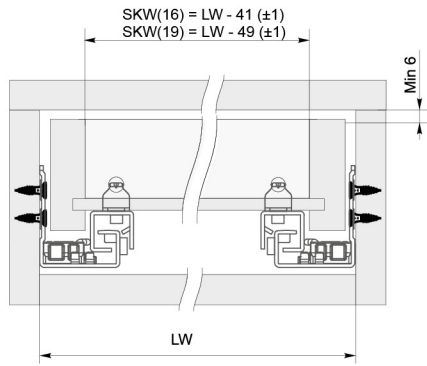DP2331 & DP4331 2-Fold concealed push-open drawer slide(with handle)


SKW(16) - Drawer inner width(≤16mm drawer side thickness)


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

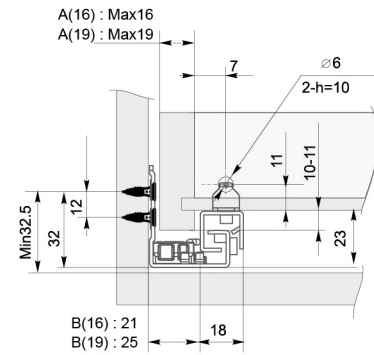


A(16) Be used for slide rails with a drawer side thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side thickness no thinner than 19mm.


1. Install the slides on the cabinet

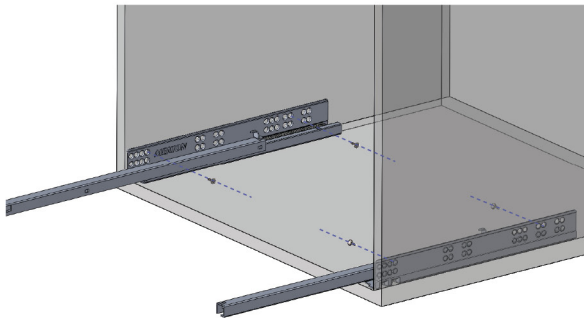


2. Install left/ right handle in the front of the drawer

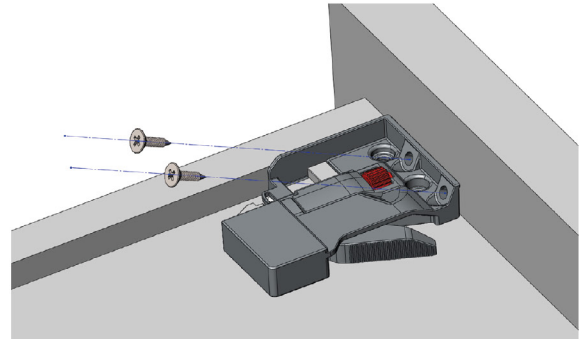




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

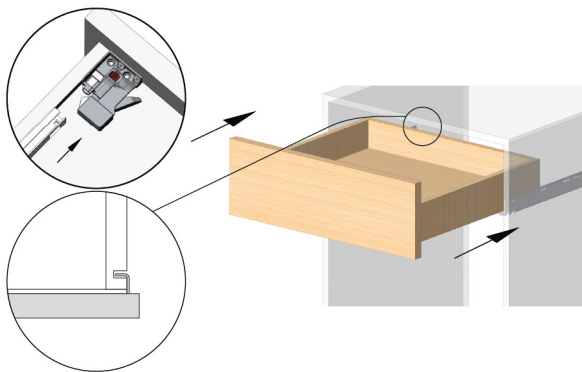

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

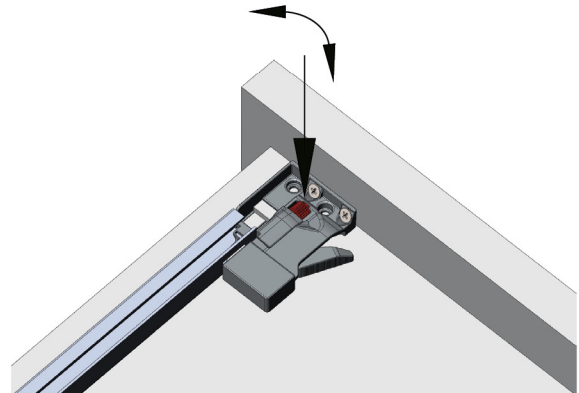


5. Push the handle lever to unlock the drawer, then pull out the drawer

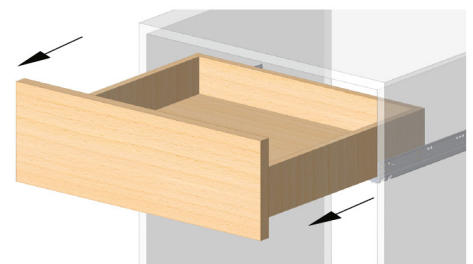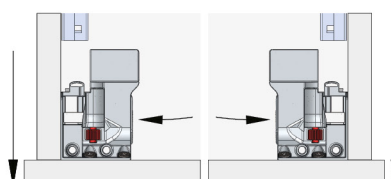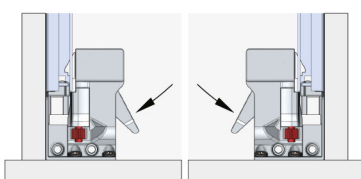

2-Fold concealed drawer slide(with handle)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 25kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: DP2341: ≤16mm
DP4341: ≤19mm
- Partial extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.

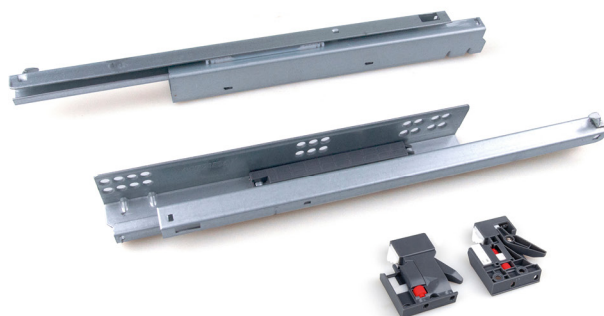



Length	Item No. DP2341	Item No. DP4341
	16mm with handle	19mm with handle
240mm	523.210.010	523.210.030
260mm	523.210.011	523.210.031
290mm	523.210.012	523.210.032
340mm	523.210.013	523.210.033
390mm	523.210.014	523.210.034
440mm	523.210.015	523.210.035
490mm	523.210.016	523.210.036
540mm	523.210.017	523.210.037
590mm	523.210.018	523.210.038

Installation dimensions

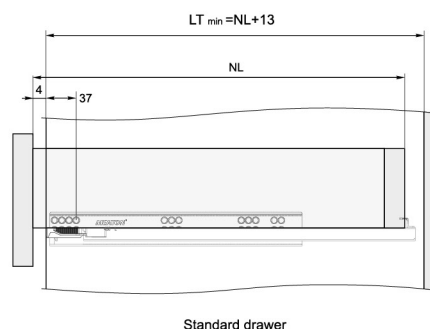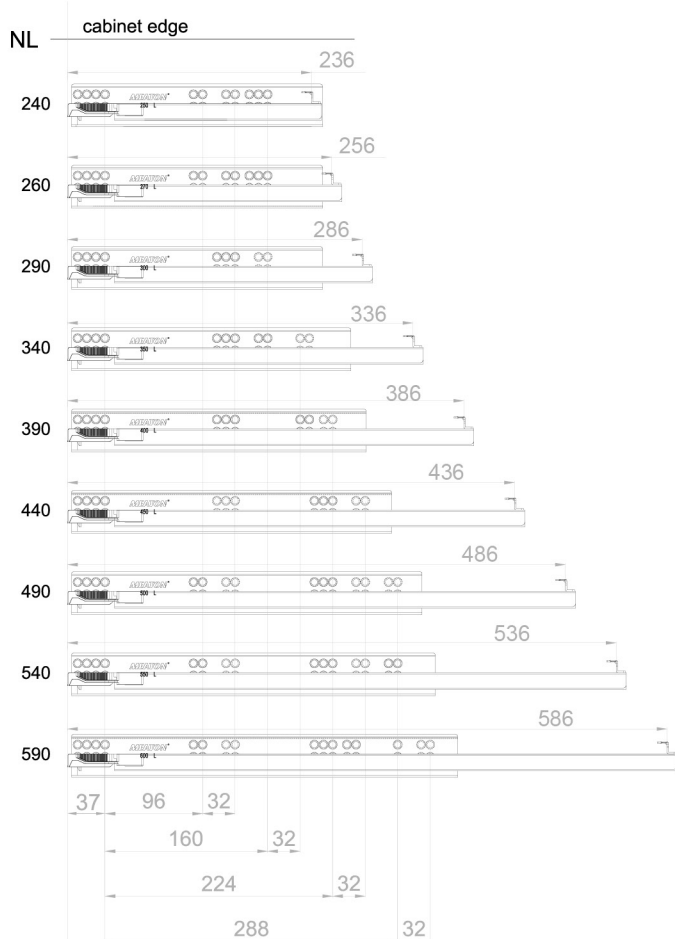

LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

DP2341 & DP4341 2-Fold concealed push-open drawer slide (with handle)

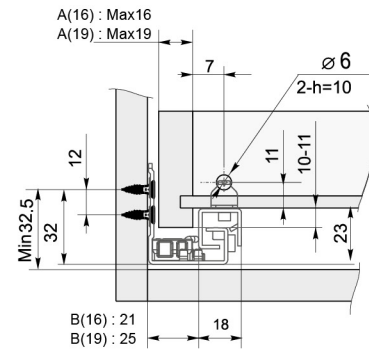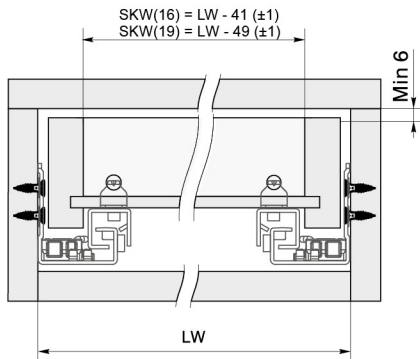


SKW(16) - Drawer inner width(≤16mm drawer side thickness)
SKW(19) - Drawer inner width(≤19mm drawer side thickness)


A(16) Be used for slide rails with a drawer side
A(19) thickness no thinner than 16mm.

B(16) Be used for slide rails with a drawer side
B(19) thickness no thinner than 19mm.


1. Install the slides on the cabinet

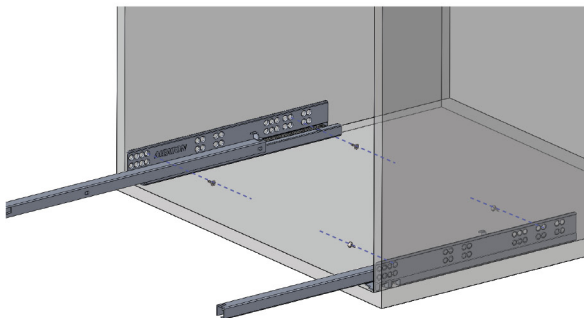


2. Install left/ right handle in the front of the drawer

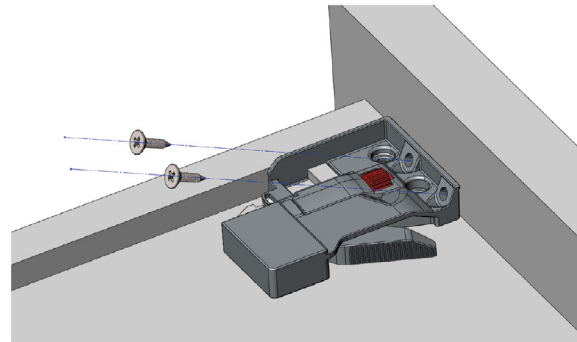



3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

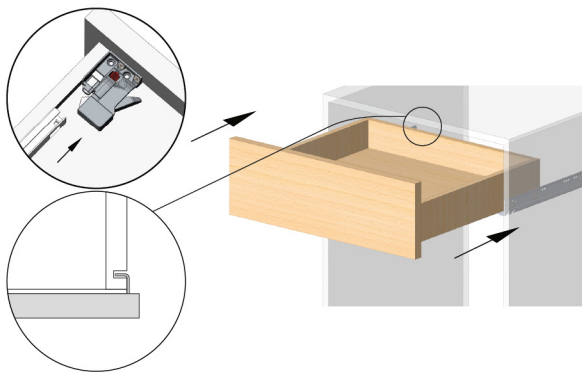

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

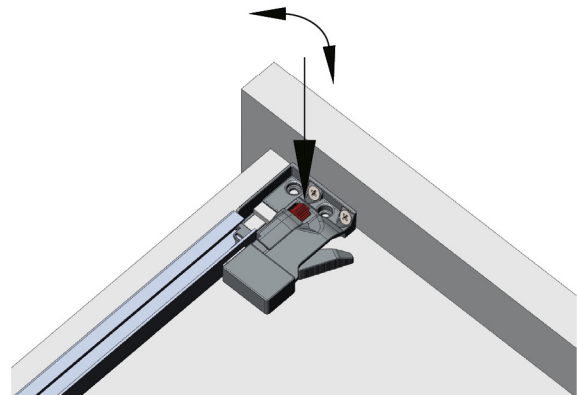


5. Push the handle lever to unlock the drawer, then pull out the drawer

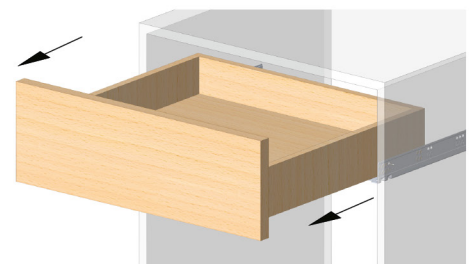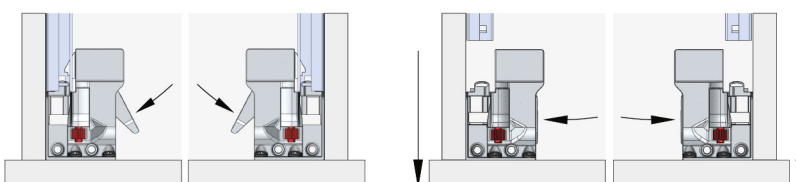

3-Fold concealed drawer slide(16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 16\text{mm}$.
- Full extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- DT3201 bear the synchronized system function.

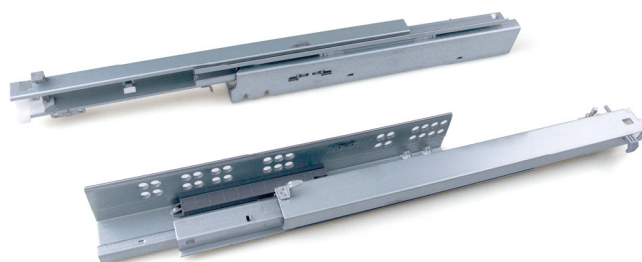


Length	Item No. DP3201	Item No. DT3201
	Push-open	Synchronized
250mm	523.340.000	523.340.040
270mm	523.340.001	523.340.041
300mm	523.340.002	523.340.042
350mm	523.340.003	523.340.043
400mm	523.340.004	523.340.044
450mm	523.340.005	523.340.045
500mm	523.340.006	523.340.046
550mm	523.340.007	523.340.047
600mm	523.340.008	523.340.048


Installation dimensions

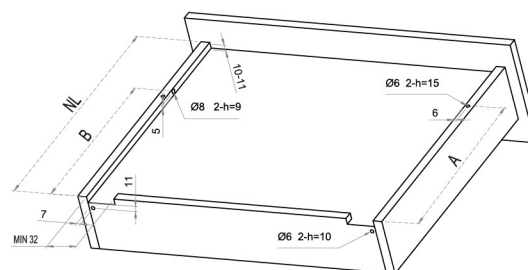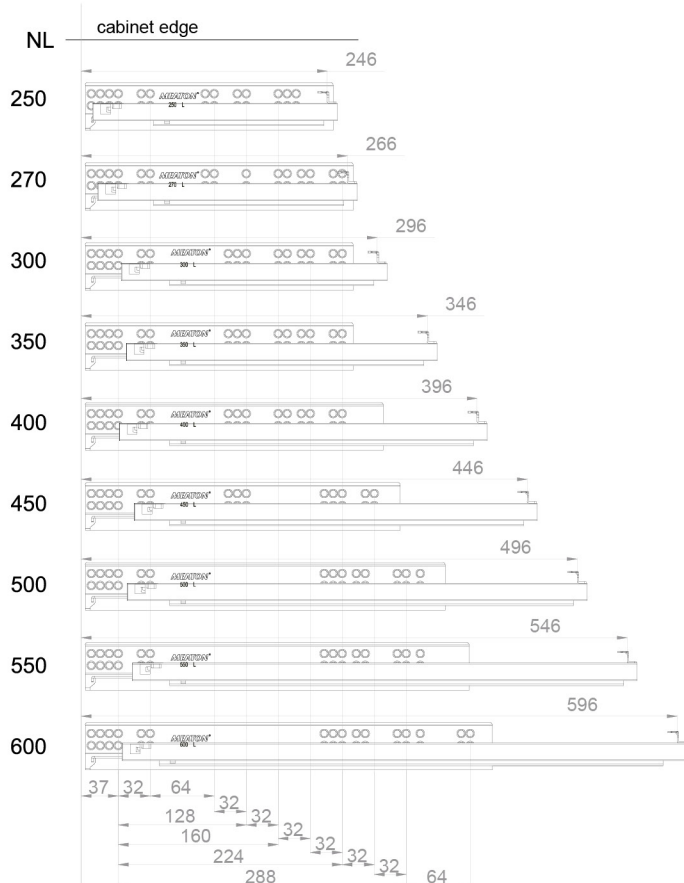

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	220.5	235.5	242	287	344	379	436	481	531


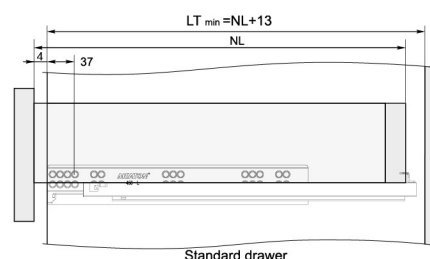


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness



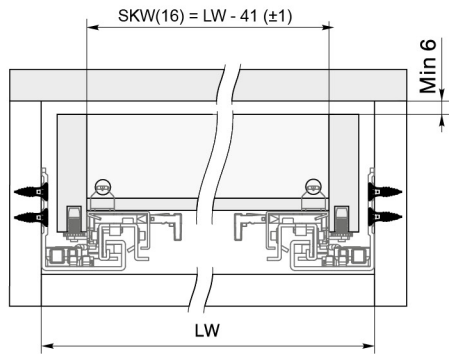
DP3201 & DT3201 3-Fold concealed drawer slide(16mm with bolt locking)


LW - Cabinet inner width


SKW(16) - Drawer inner width(≤16mm drawer side thickness)

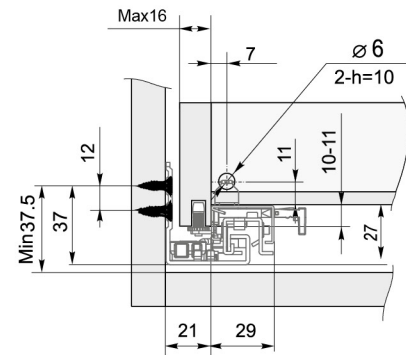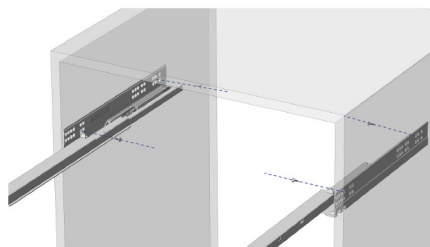
1. Install the slides on the cabinet

2. Set the drawer on the slides

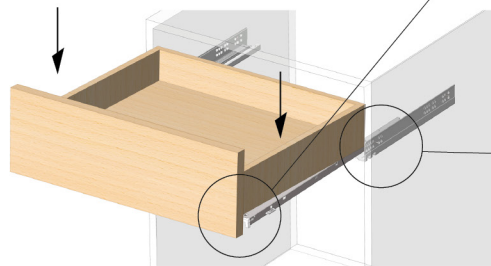
- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

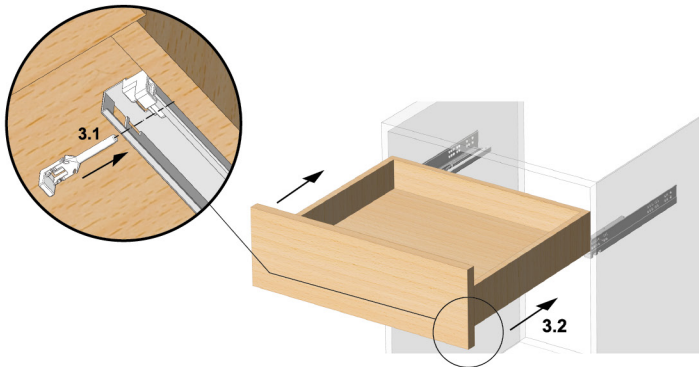- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer


4. Disassembly of the drawer


- 4.1 Take out the plastic pin to separate the drawer from the slides
- 4.2 Take up the drawer
- 4.3 Draw out the drawer

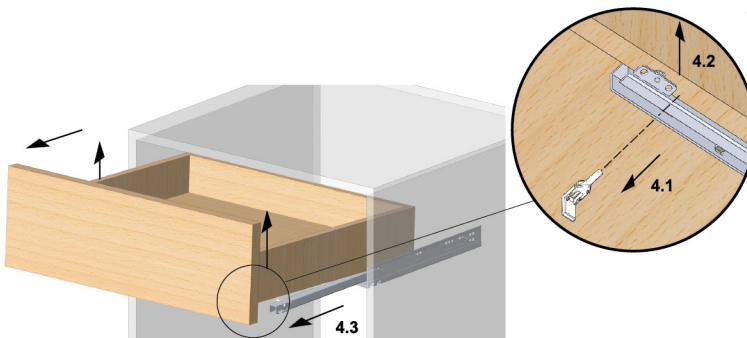

3-Fold concealed drawer slide(19mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 19\text{mm}$.
- Full extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT5201 bear the synchronized system function.

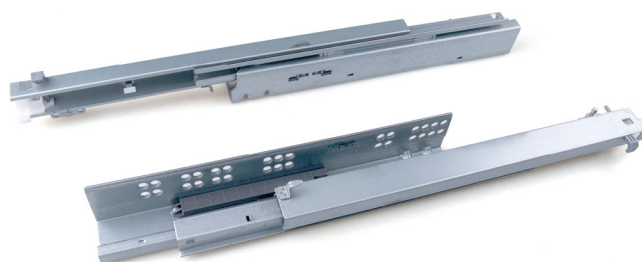


Length	Item No. DP5201	Item No. DT5201
	Push-open	Synchronized
250mm	523.340.020	523.340.060
270mm	523.340.021	523.340.061
300mm	523.340.022	523.340.062
350mm	523.340.023	523.340.063
400mm	523.340.024	523.340.064
450mm	523.340.025	523.340.065
500mm	523.340.026	523.340.066
550mm	523.340.027	523.340.067
600mm	523.340.028	523.340.068


Installation dimensions

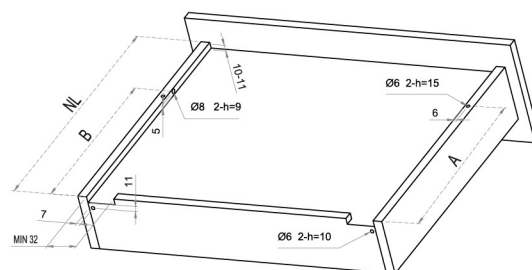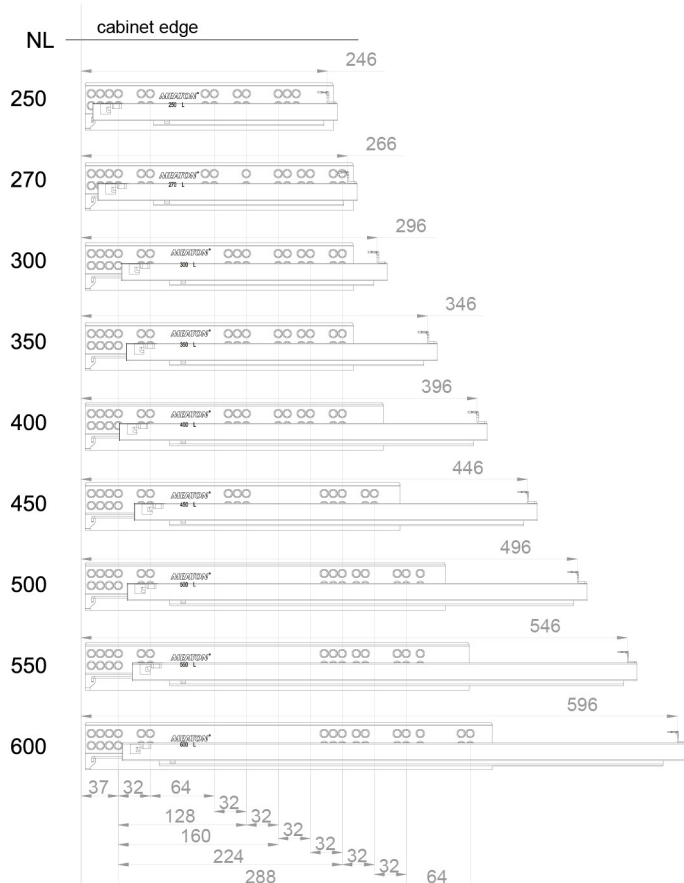

NL	250	270	300	350	400	450	500	550	600
A	206	221	231	276	301	336	361	406	426
B	220.5	235.5	242	287	344	379	436	481	531

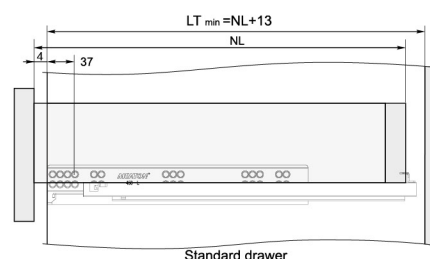


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

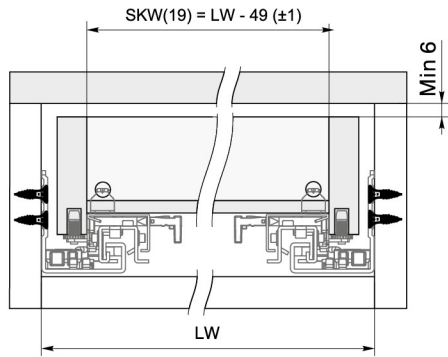
DP5201 & DT5201 3-Fold concealed drawer slide(19mm with bolt locking)


LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)



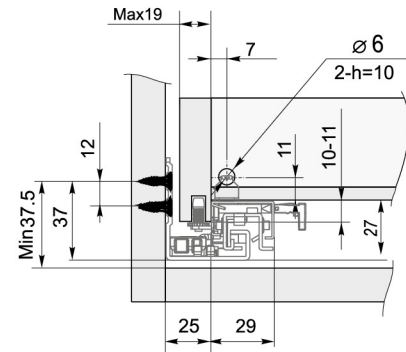


1. Install the slides on the cabinet

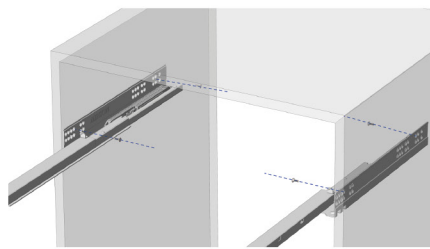


2. Set the drawer on the slides

- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal

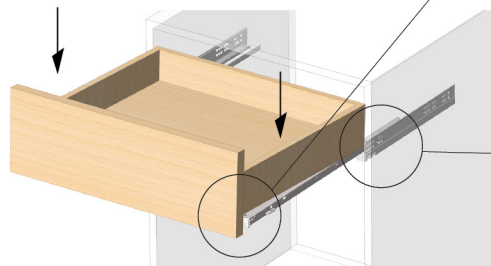


3. Fix the drawer and slides

- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer

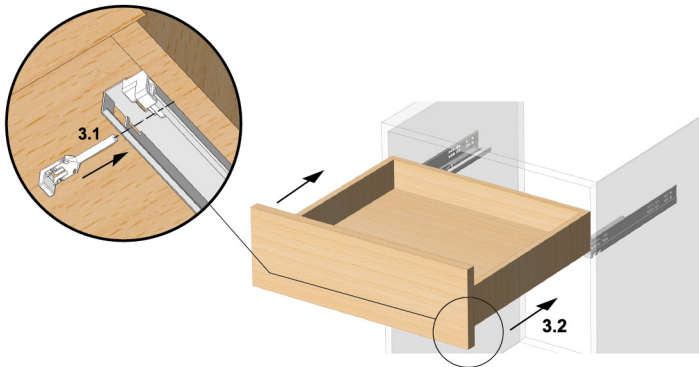

4. Disassembly of the drawer


- 4.1 Take out the plastic pin to separate the drawer from the slides
- 4.2 Take up the drawer
- 4.3 Draw out the drawer

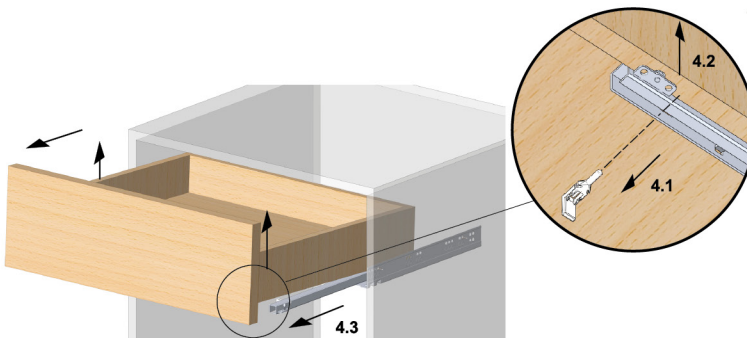

3-Fold concealed drawer slide(16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 16\text{mm}$.
- Full extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismounting for drawers.
- DT3221 bear the synchronized system function.

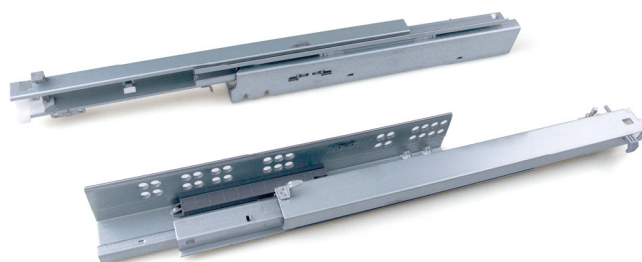


Longitud	Item No. DP3221	Item No. DT3221
	Push-open	Synchronized
240mm	523.340.010	523.340.050
260mm	523.340.011	523.340.051
290mm	523.340.012	523.340.052
340mm	523.340.013	523.340.053
390mm	523.340.014	523.340.054
440mm	523.340.015	523.340.055
490mm	523.340.016	523.340.056
540mm	523.340.017	523.340.057
590mm	523.340.018	523.340.058


Installation dimensions

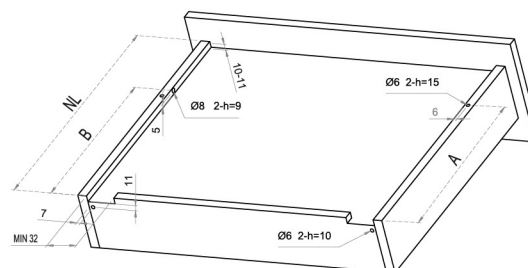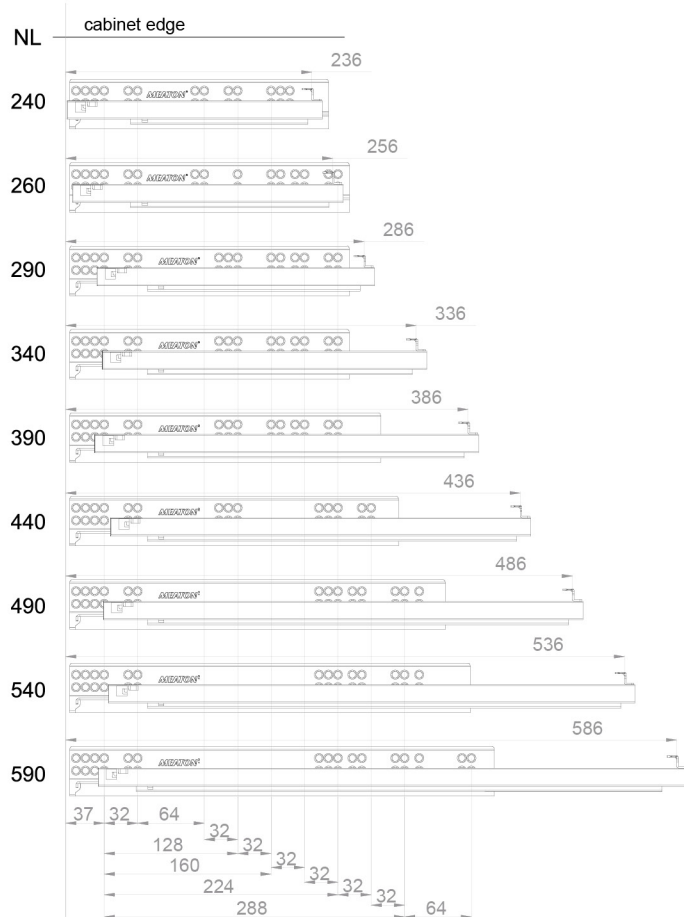

NL	240	260	290	340	390	440	490	540	590
A	190	205	245	270	305	330	355	390	415
B	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5


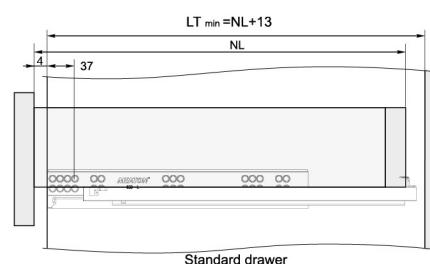


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness



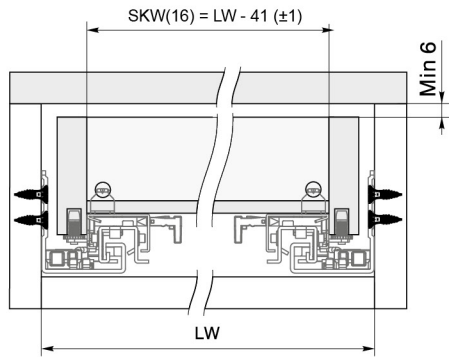
DP3221 & DT3221 3-Fold concealed drawer slide(16mm with bolt locking)


LW - Cabinet inner width



SKW(16) - Drawer inner width(≤16mm drawer side thickness)

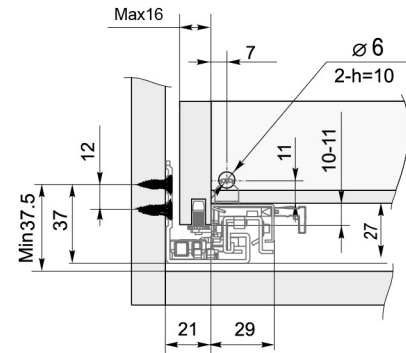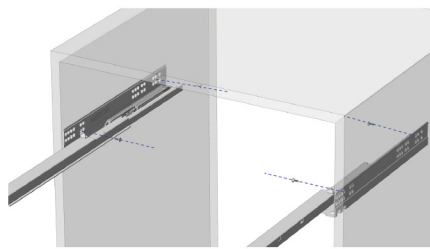
1. Install the slides on the cabinet

2. Set the drawer on the slides

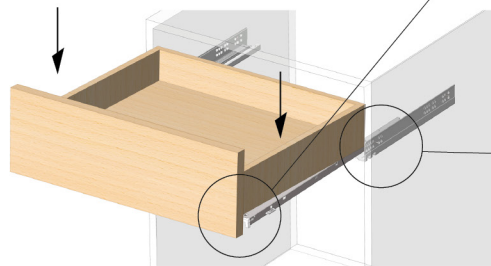
- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal


3. Fix the drawer and slides

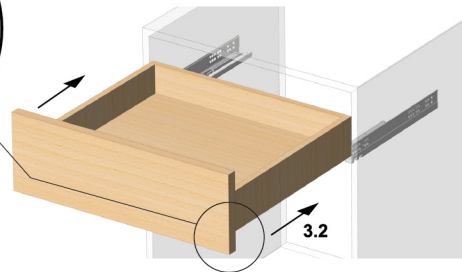- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer


4. Disassembly of the drawer


- 4.1 Take out the plastic pin to separate the drawer from the slides
- 4.2 Take up the drawer
- 4.3 Draw out the drawer

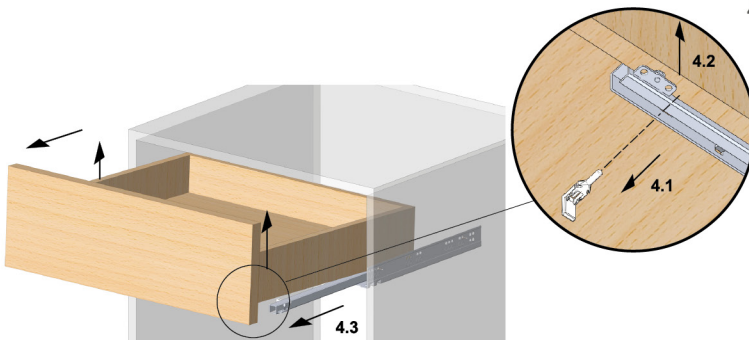

3-Fold concealed drawer slide(19mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 19\text{mm}$.
- Full extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT5221 bear the synchronized system function.

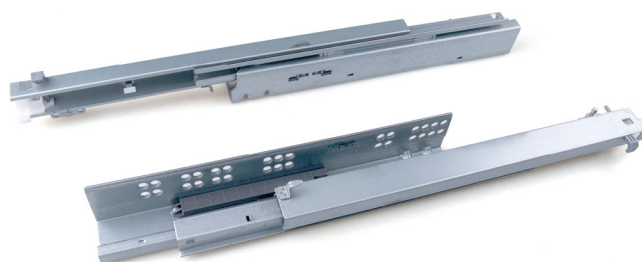


Longitud	Item No. DP5221	Item No. DT5221
	Push-open	Synchronized
240mm	523.340.030	523.340.070
260mm	523.340.031	523.340.071
290mm	523.340.032	523.340.072
340mm	523.340.033	523.340.073
390mm	523.340.034	523.340.074
440mm	523.340.035	523.340.075
490mm	523.340.036	523.340.076
540mm	523.340.037	523.340.077
590mm	523.340.038	523.340.078


Installation dimensions

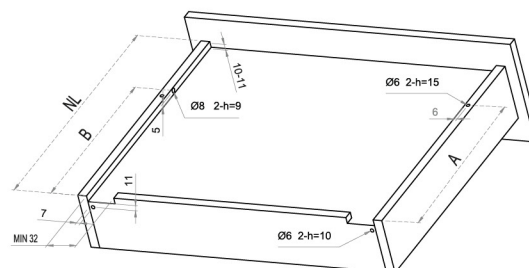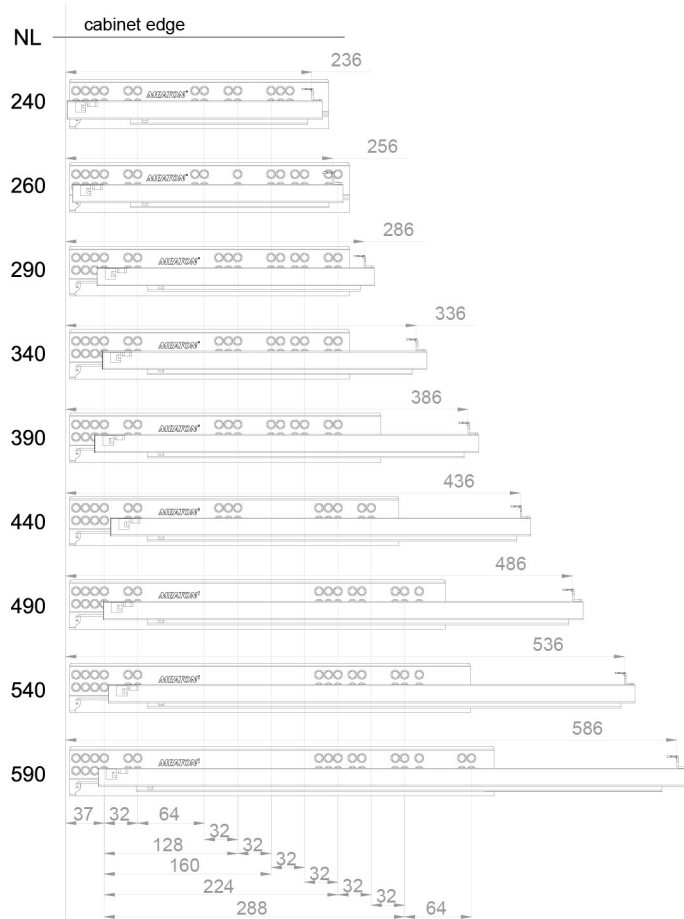

NL	240	260	290	340	390	440	490	540	590
A	190	205	245	270	305	330	355	390	415
B	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5

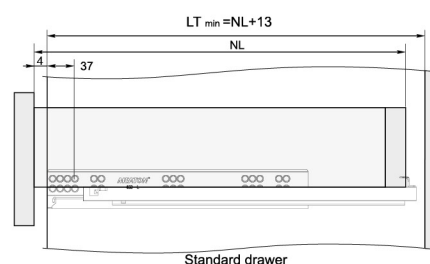


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

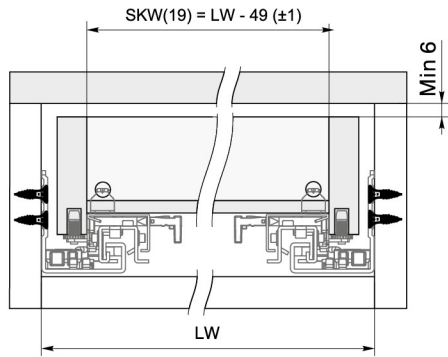
DP5221 & DT5221 3-Fold concealed drawer slide(19mm with bolt locking)


LW - Cabinet inner width

SKW(19) - Drawer inner width(≤19mm drawer side thickness)





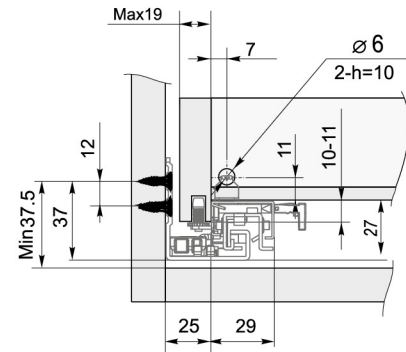


1. Install the slides on the cabinet

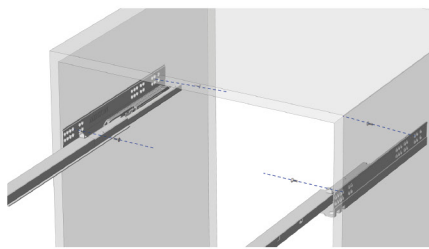

2. Set the drawer on the slides

- 2.1 Insert the slide hook into the drawer back holes
- 2.2 Insert the slide adjustable screw into the drawer side wall
- 2.3 Adjust the left/right screw to make the drawer horizontal

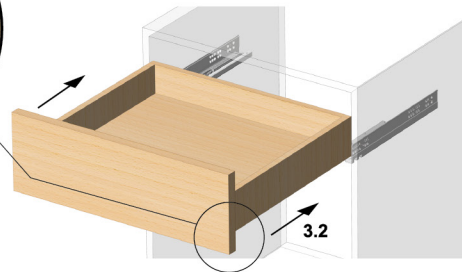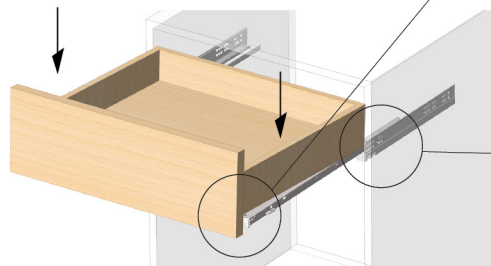


3. Fix the drawer and slides

- 3.1 insert the left/right plastic pins into the pre-drilled holes on the drawer side walls
- 3.2 Close the drawer

4. Disassembly of the drawer

- 4.1 Take out the plastic pin to separate the drawer from the slides
- 4.2 Take up the drawer
- 4.3 Draw out the drawer

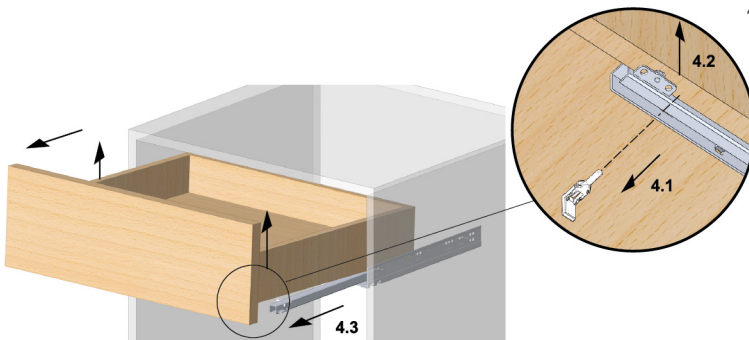

3-Fold concealed drawer slide(16mm with handle)

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: ≤16mm.





PN with this handle DP3305&DT3305

PN with this handle DP3331&DT3331


- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT3331 bear the synchronized system function.

Length	Item No. DP3331	Item No. DT3331
	Push-open	Synchronized
250mm	523.310.000	523.310.040
270mm	523.310.001	523.310.041
300mm	523.310.002	523.310.042
350mm	523.310.003	523.310.043
400mm	523.310.004	523.310.044
450mm	523.310.005	523.310.045
500mm	523.310.006	523.310.046
550mm	523.310.007	523.310.047
600mm	523.310.008	523.310.048

Installation dimensions

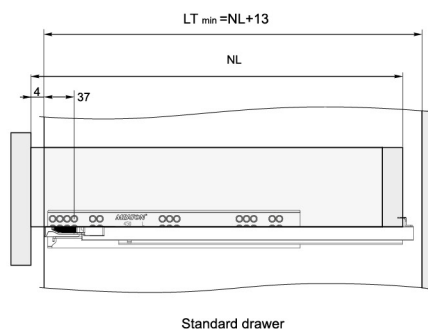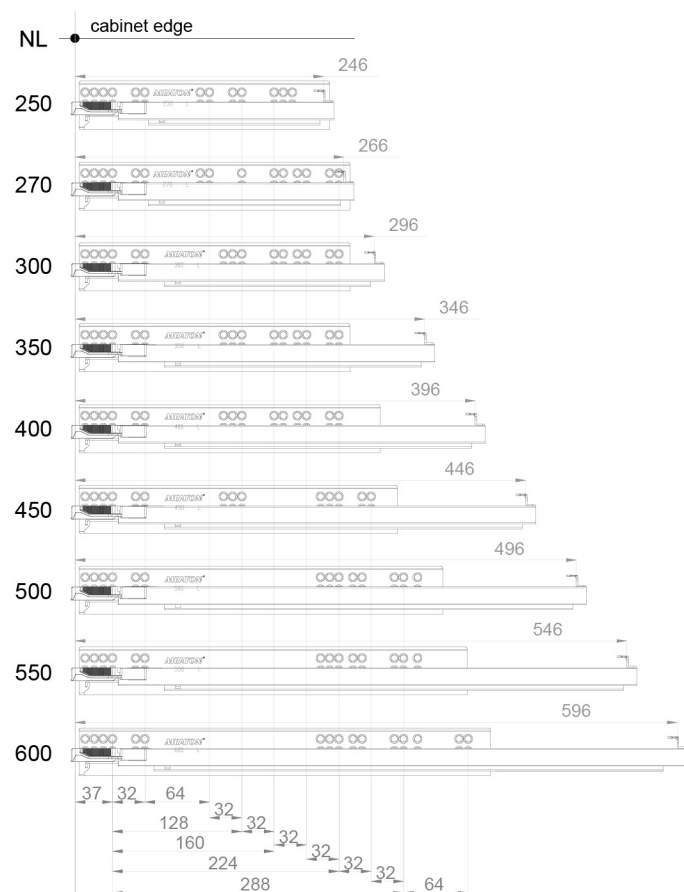


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

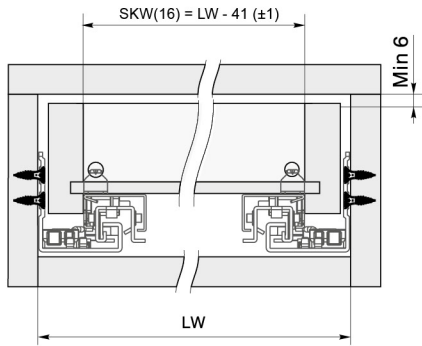
DP3331 & DT3331 3-Fold concealed drawer slide(16mm with handle)


LW - Cabinet inner width


SKW(16) - Drawer inner width(≤16mm drawer side thickness)

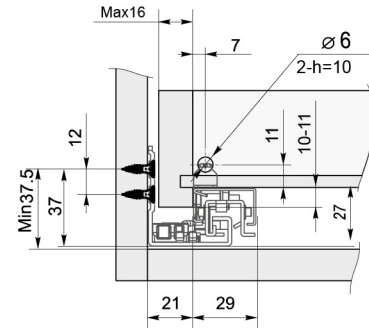


1. Install the slides on the cabinet

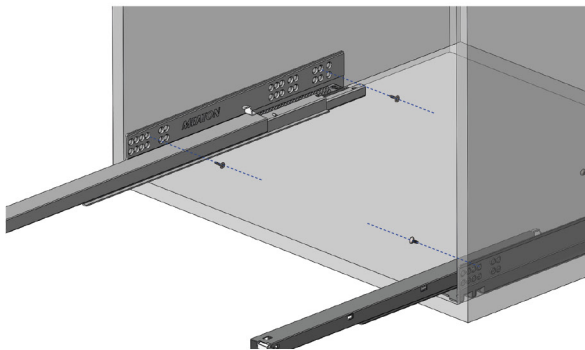


2. Install left/ right handle in the front of the drawer

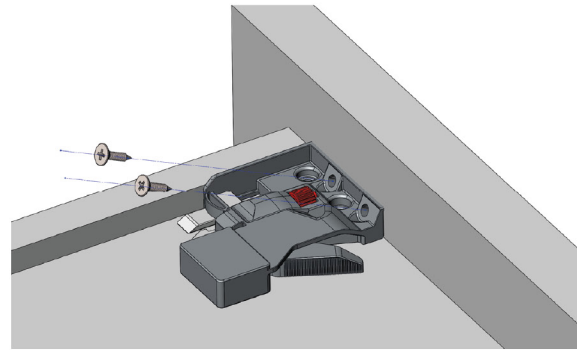




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

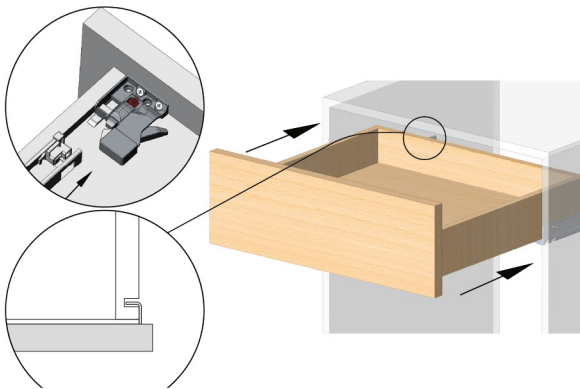

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

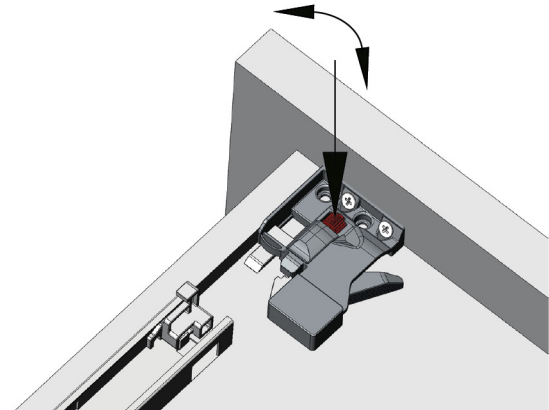

5. Push the handle lever to unlock the drawer, then pull out the drawer

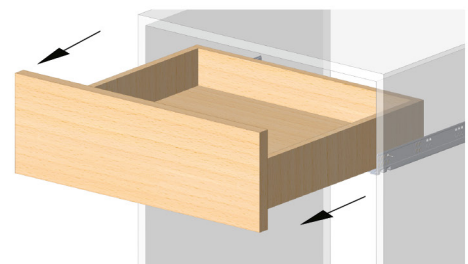

3-Fold concealed drawer slide(19mm with handle)

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 19\text{mm}$.





PN with this handle DP5305&DT5305

PN with this handle DP5331&DT5331


- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT5331 bear the synchronized system function.

Length	Item No. DP5331	Item No. DT5331
	Push-open	Synchronized
250mm	523.310.020	523.310.060
270mm	523.310.021	523.310.061
300mm	523.310.022	523.310.062
350mm	523.310.023	523.310.063
400mm	523.310.024	523.310.064
450mm	523.310.025	523.310.065
500mm	523.310.026	523.310.066
550mm	523.310.027	523.310.067
600mm	523.310.028	523.310.068



Installation dimensions

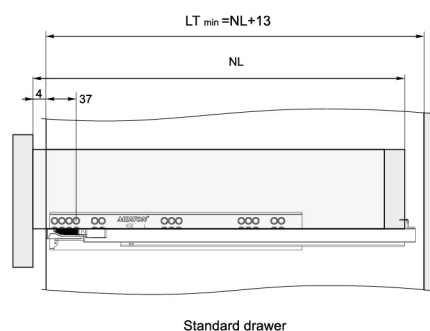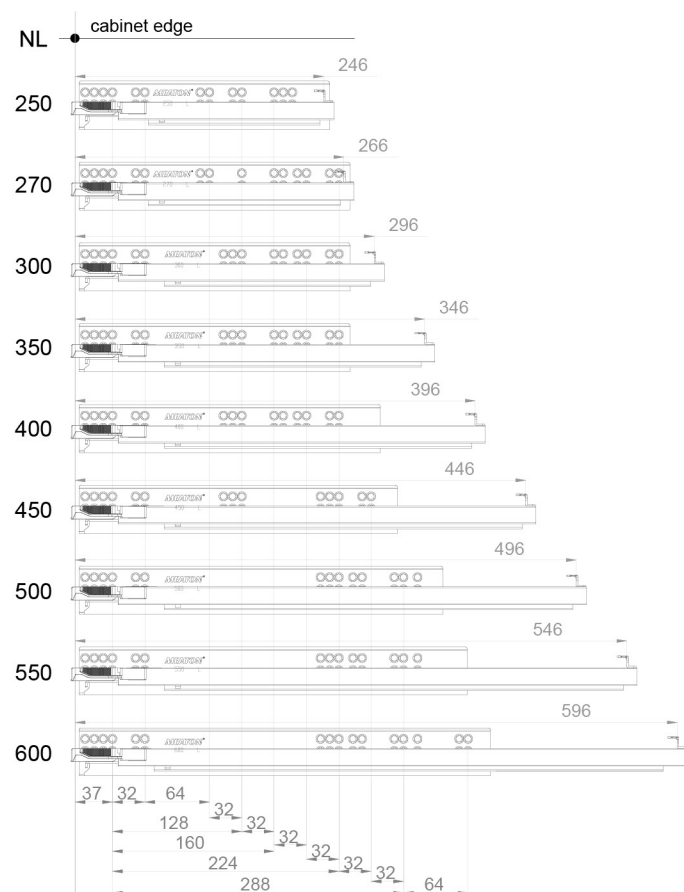



LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

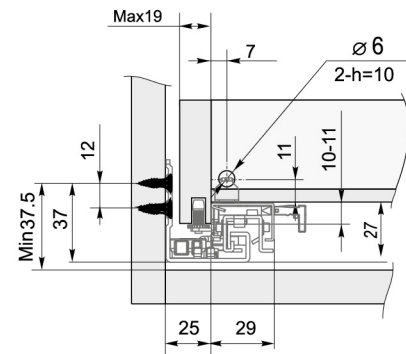




2. Install left/ right handle in the front of the drawer

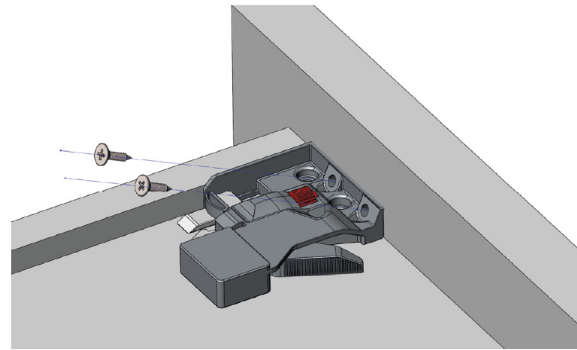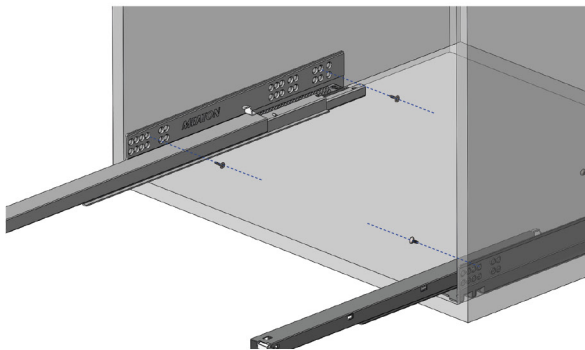

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

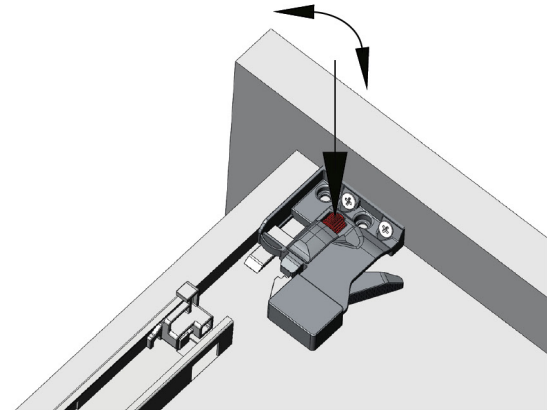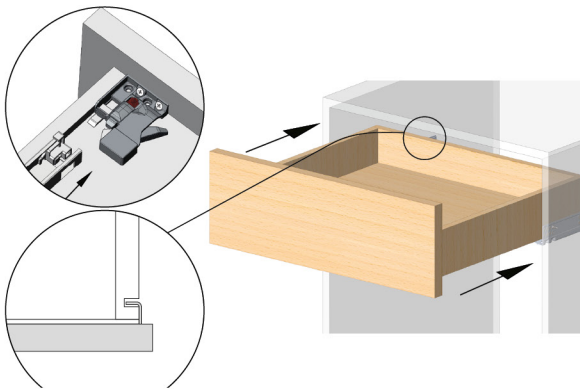

- 5.** Push the handle lever to unlock the drawer, then pull out the drawer

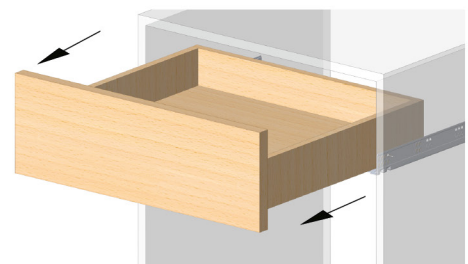

3-Fold concealed drawer slide(16mm with handle)

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 16\text{mm}$.





PN with this handle DP3325&DT3325

PN with this handle DP3341&DT5341


- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT3341 bear the synchronized system function.

Length	Item No. DP3341	
	Push-open	Synchronized
240mm	523.310.010	523.310.050
260mm	523.310.011	523.310.051
290mm	523.310.012	523.310.052
340mm	523.310.013	523.310.053
390mm	523.310.014	523.310.054
440mm	523.310.015	523.310.055
490mm	523.310.016	523.310.056
540mm	523.310.017	523.310.057
590mm	523.310.018	523.310.058

Installation dimensions

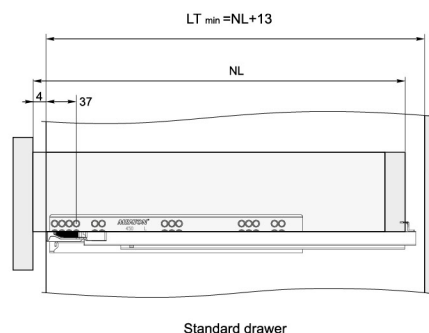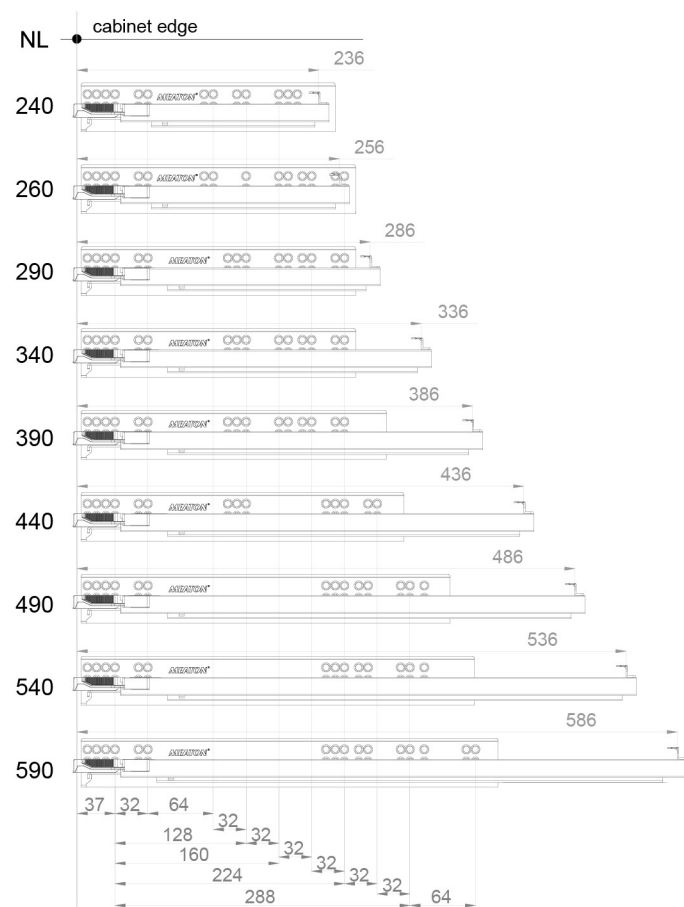


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

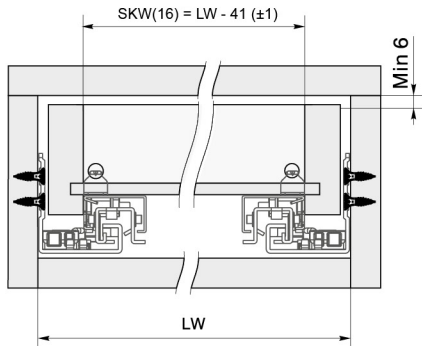
DP3341 & DT3341 3-Fold concealed drawer slide(16mm with handle)


LW - Cabinet inner width


SKW(16) - Drawer inner width(≤16mm drawer side thickness)

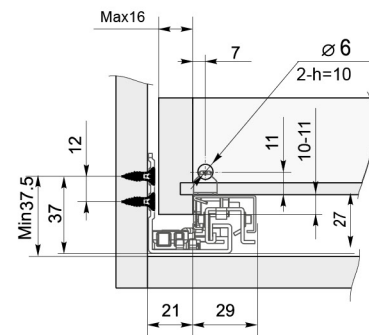


1. Install the slides on the cabinet

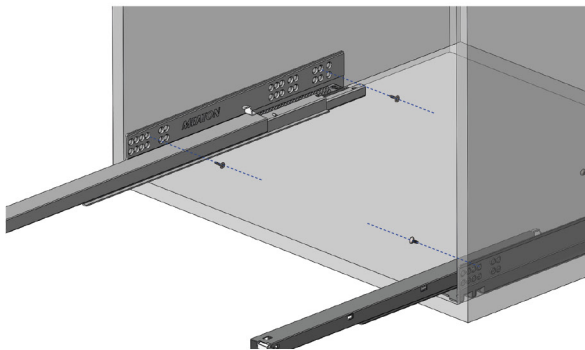


2. Install left/ right handle in the front of the drawer

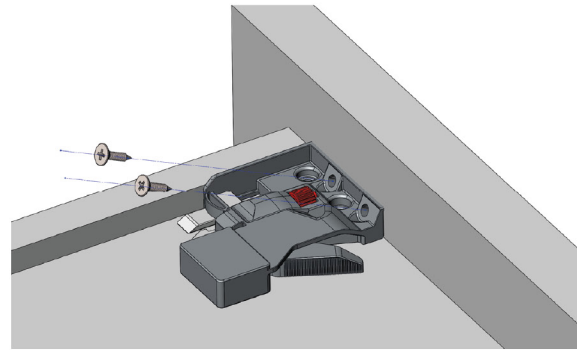




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

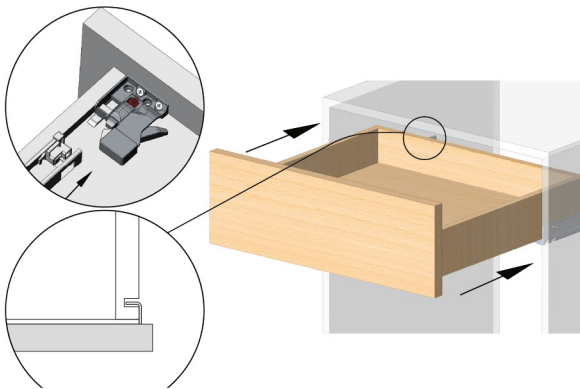

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

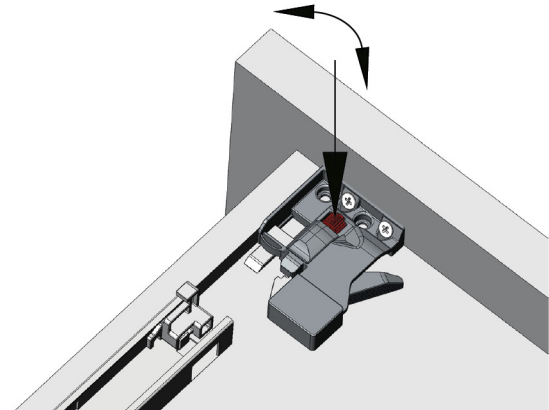

5. Push the handle lever to unlock the drawer, then pull out the drawer

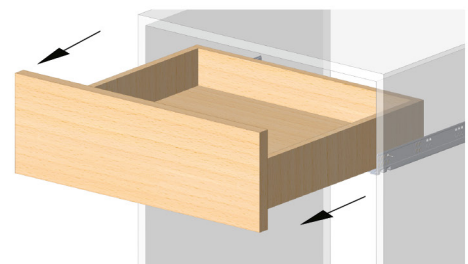

3-Fold concealed drawer slide(19mm with handle)

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 19\text{mm}$.





PN with this handle DP5325&DT5325

PN with this handle DP5341&DT5341


- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT5341 bear the synchronized system function.

Length	Item No. DP5341	Item No. DT5341
	Push-open	Synchronized
240mm	523.310.030	523.310.070
260mm	523.310.031	523.310.071
290mm	523.310.032	523.310.072
340mm	523.310.033	523.310.073
390mm	523.310.034	523.310.074
440mm	523.310.035	523.310.075
490mm	523.310.036	523.310.076
540mm	523.310.037	523.310.077
590mm	523.310.038	523.310.078

Installation dimensions

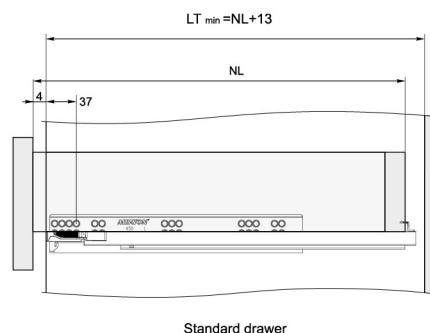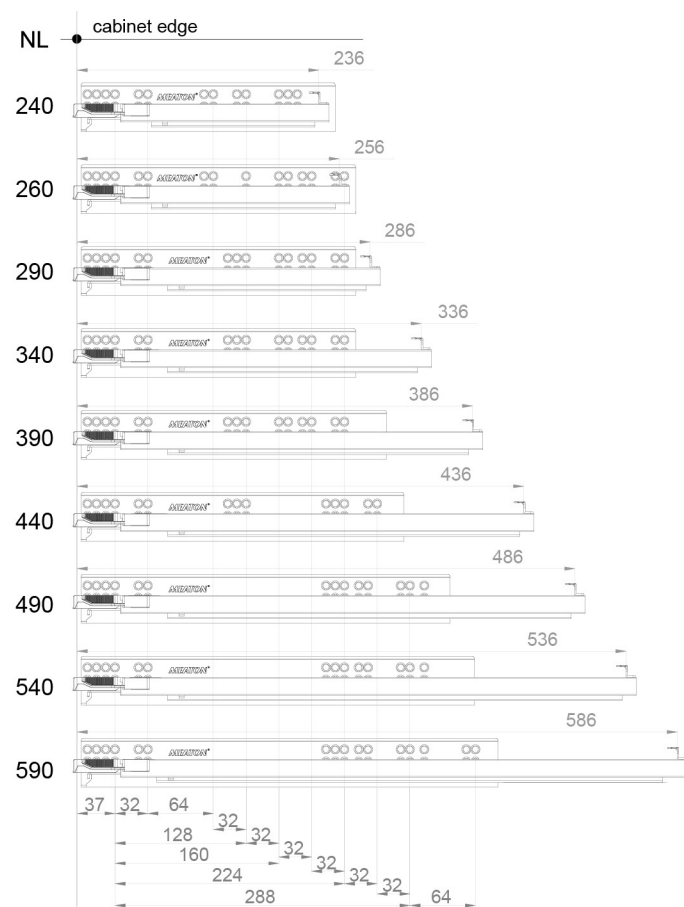


LT - Cabinet inner depth
NL - Nominal slide length
X - Board thickness

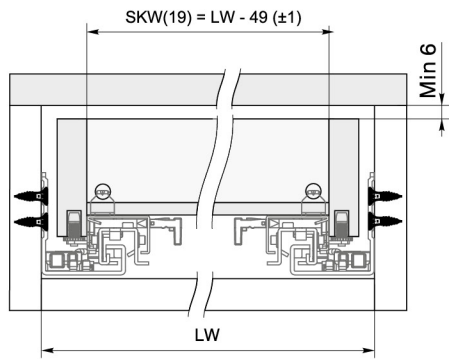
DP5341 & DT5341 3-Fold concealed drawer slide(19mm with handle)


LW - Cabinet inner width


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

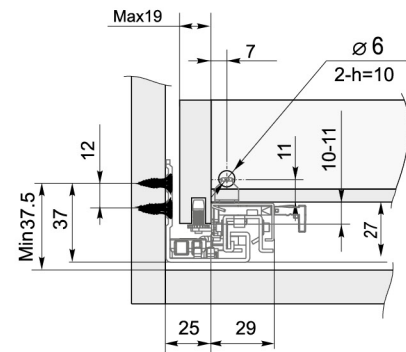


1. Install the slides on the cabinet

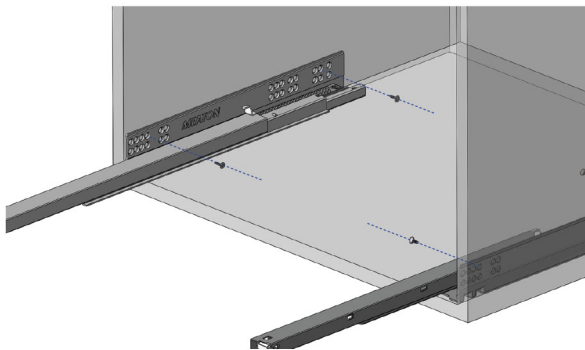


2. Install left/ right handle in the front of the drawer

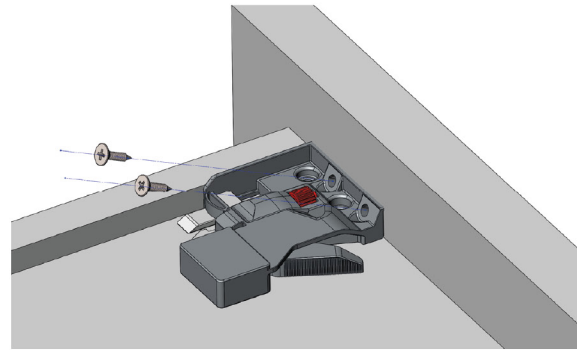




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

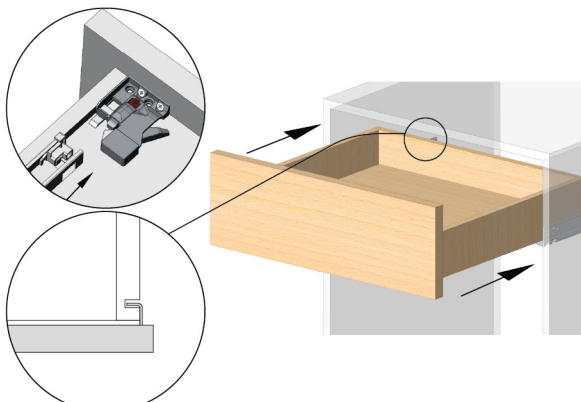

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

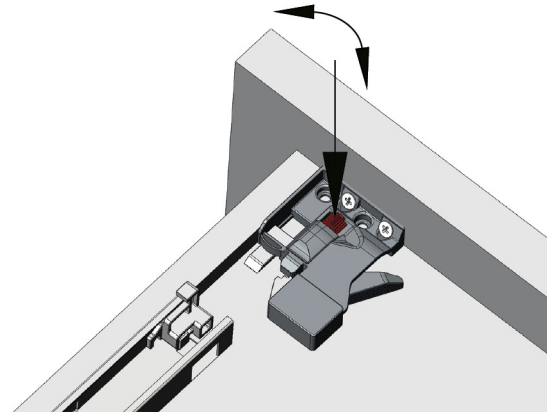

5. Push the handle lever to unlock the drawer, then pull out the drawer

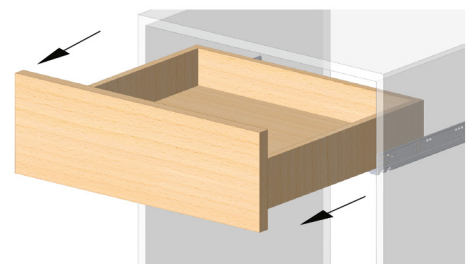

3-Fold concealed drawer slide(16mm with handle) - American type

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 16\text{mm}$.
- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT3326 bear the synchronized system function.




PN with this handle DP3317&DT3317


PN with this handle DP3326&DT3326

Length	Item No. DP3326	Item No. DT3326
	Push-open	Synchronized
305mm	523.310.080	523.310.090
381mm	523.310.081	523.310.091
457mm	523.310.082	523.310.092
533mm	523.310.083	523.310.093

Installation dimensions

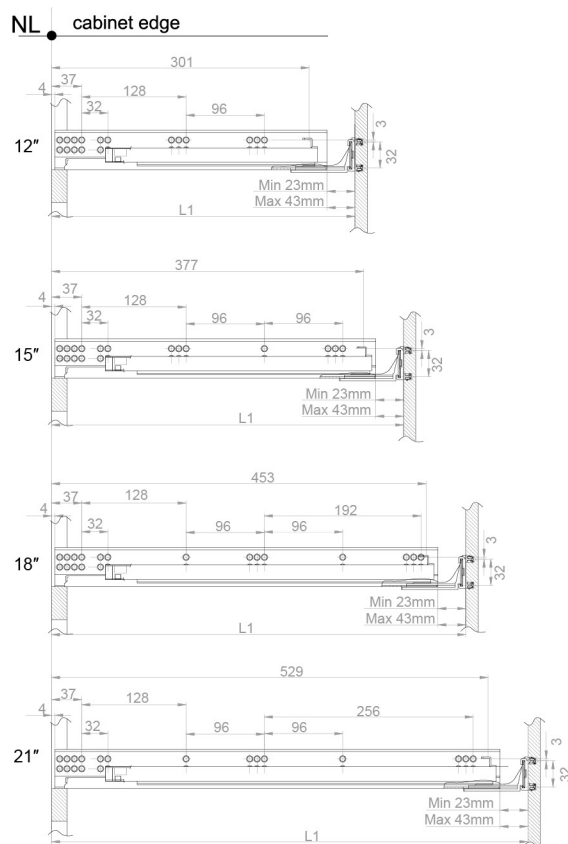


NL	NL	Min L1	Max L1
12"	305	338	358
15"	381	416	436
18"	457	494	514
21"	533	568	588

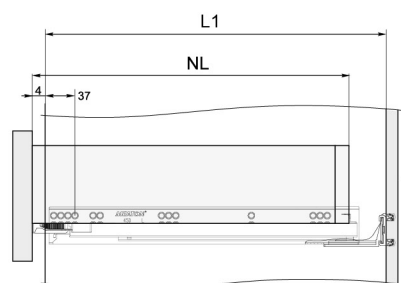

Standard drawer


NL - nominal slide length

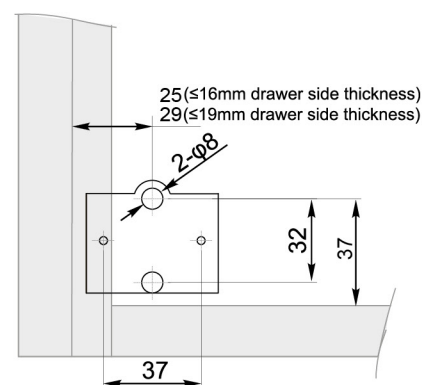

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

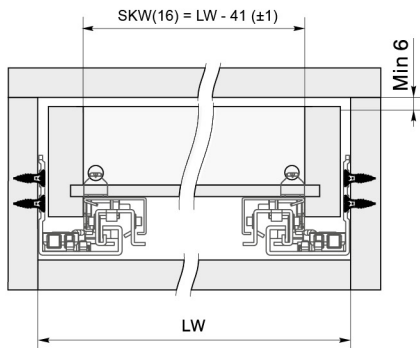DP3326&DT3326 3-Fold concealed drawer slide(16mm with handle) - American type


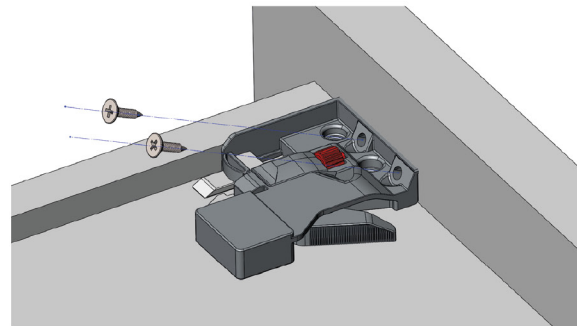
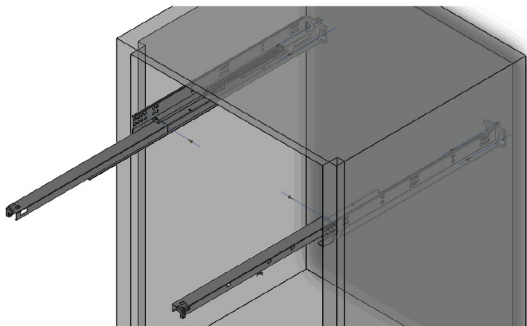
LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)

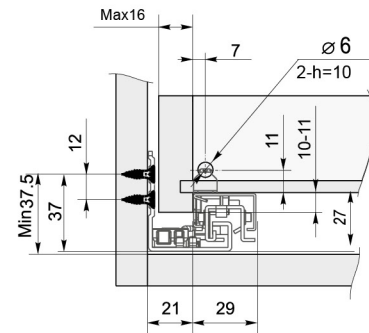



1. Install the slides on the cabinet

2. Install left/ right handle in the front of the drawer






3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

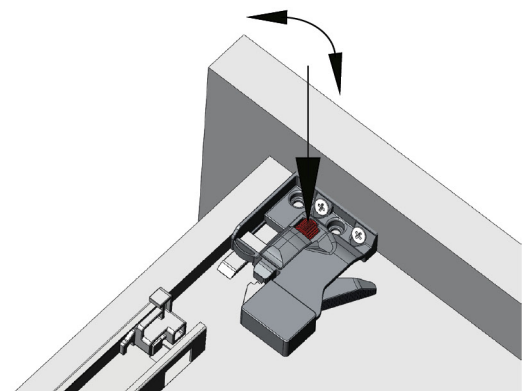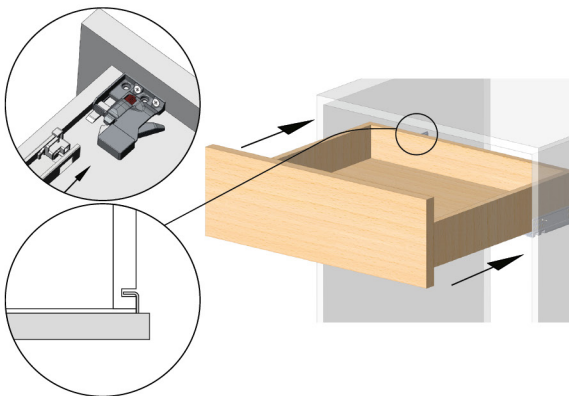

5. Push the handle lever to unlock the drawer, then pull out the drawer

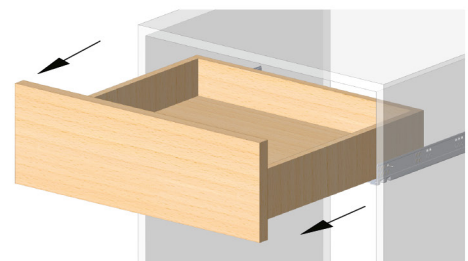

3-Fold concealed drawer slide(19mm with handle) - American type

Technical specifications:

- Main material: galvanized sheet.
- Max loading capacity: 30kg.
- Life guarantee: 50,000 cycles.
- Usage: variety of drawers.
- Thickness of board: $\leq 19\text{mm}$.
- Full extension, handle front fixing device, easy height adjustment.
- Outstanding sliding stability.
- Easy and safe mounting and dismantling for drawers.
- DT3326 bear the synchronized system function.




PN with this handle DP5317&DT5317


PN with this handle DP5326&DT5326

Length	Item No. DP5326	Item No. DT5326
	Push-open	Synchronized
305mm	523.310.100	523.310.110
381mm	523.310.101	523.310.111
457mm	523.310.102	523.310.112
533mm	523.310.103	523.310.113

Installation dimensions

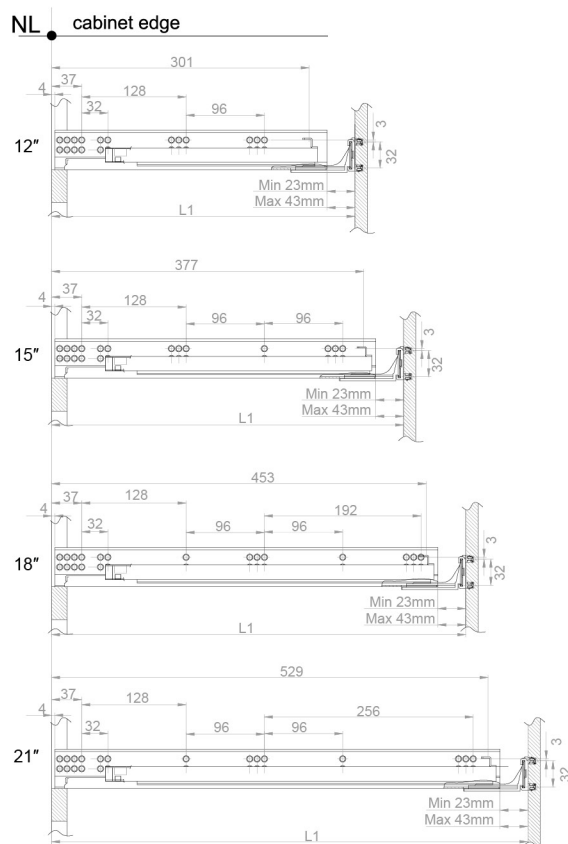


NL	NL	Min L1	Max L1
12"	305	338	358
15"	381	416	436
18"	457	494	514
21"	533	568	588

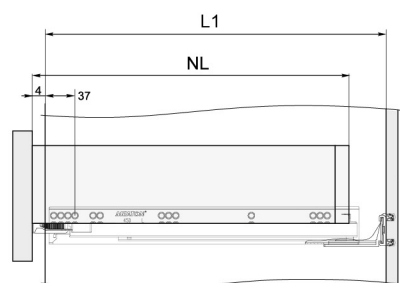

Standard drawer


NL - nominal slide length

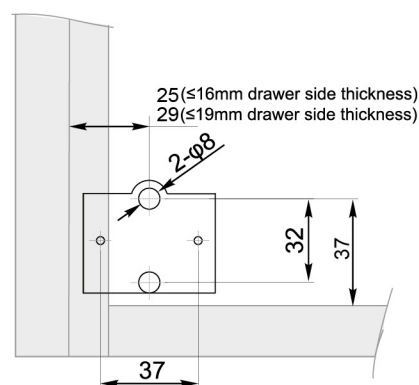

LT - Cabinet inner depth


NL - Nominal slide length

X - Board thickness

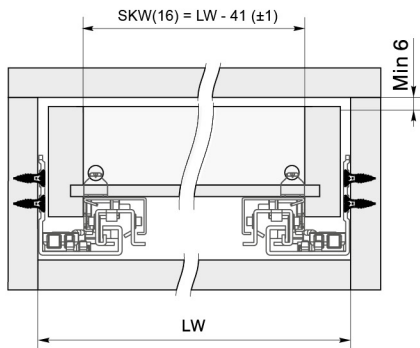


LW - Cabinet inner width


SKW(19) - Drawer inner width(≤19mm drawer side thickness)

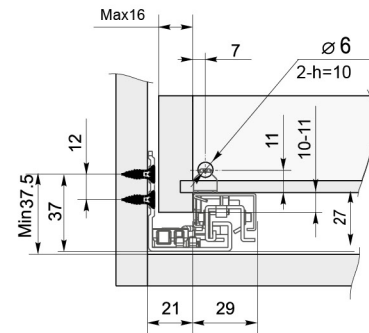


1. Install the slides on the cabinet

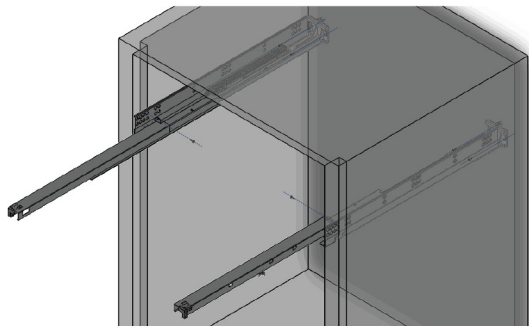


2. Install left/ right handle in the front of the drawer

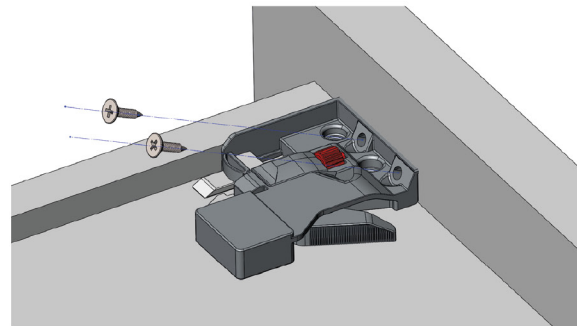




3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

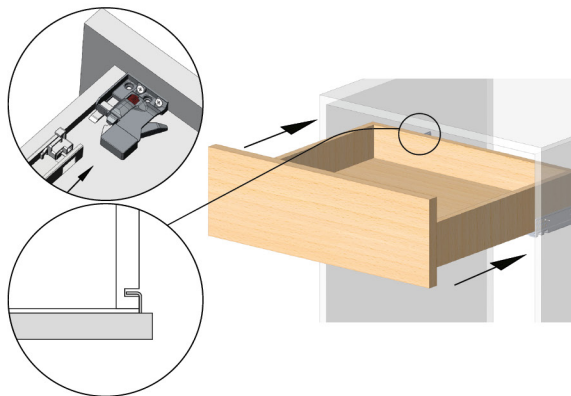

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

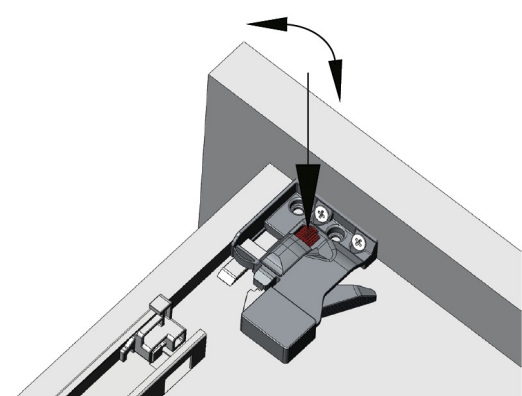


5. Push the handle lever to unlock the drawer, then pull out the drawer

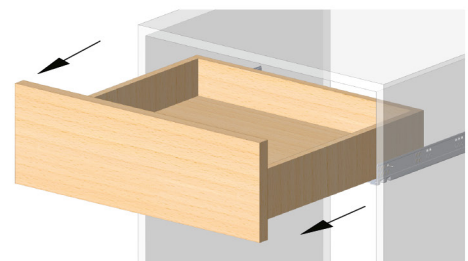

2-Fold light concealed drawer slider (16mm with bolt locking)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 20kg.
 - Life guarantee: 40,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
-
- Partial extension, bolt front fixing, easy height adjustment, make an economical solution for industry.
 - Excellent stability and silence effect.
 - Special installation method to meet the needs of specific customer installation habits.
 - Gently opening and closing for comfortable lifestyle.

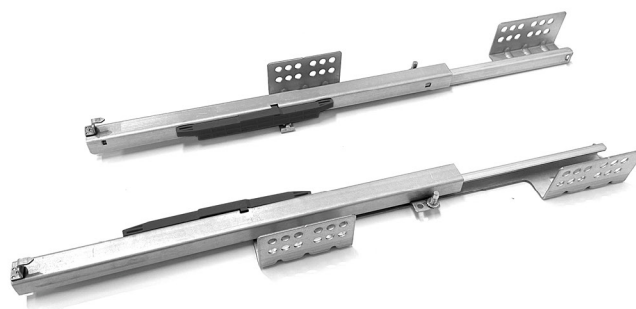


Length	Item No. DP6201
	Push-open
250mm	523.240.040
300mm	523.240.042
350mm	523.240.043
400mm	523.240.044
450mm	523.240.045
500mm	523.240.046



Installation dimensions

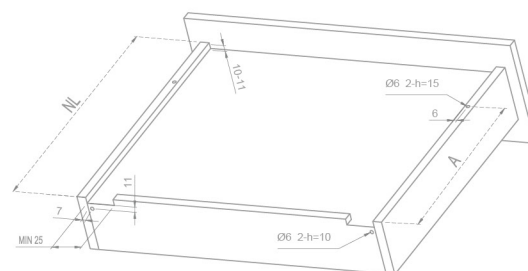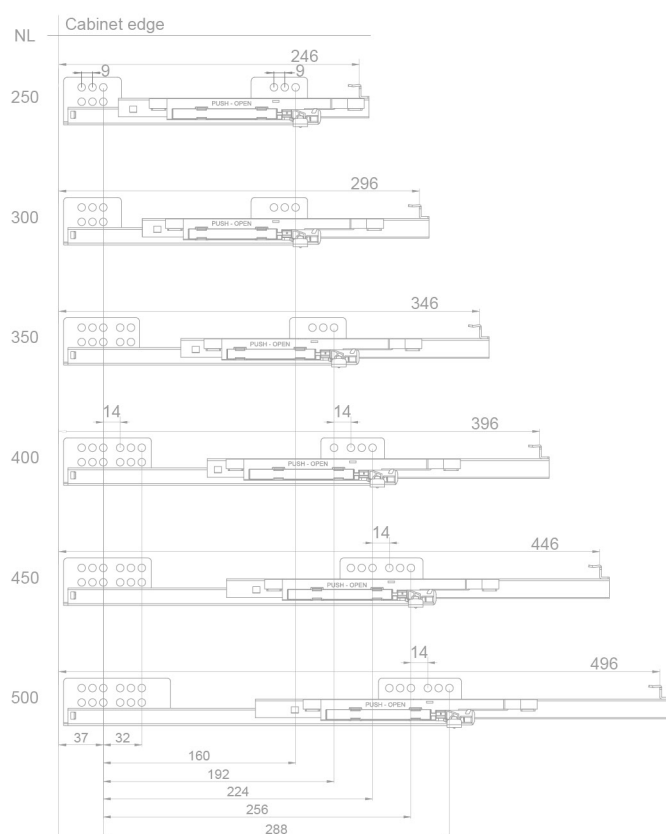

NL	250	300	350	400	450	500
A	188.5	188.5	221.5	249.5	283.5	309.5

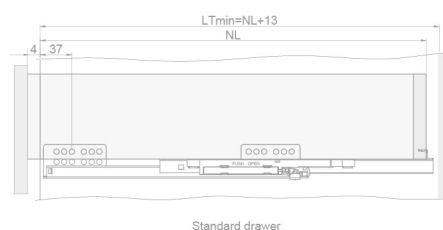


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

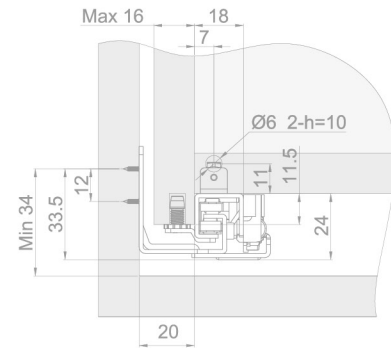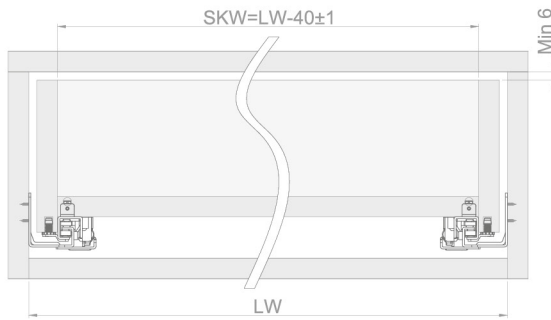DP6201 2-Fold light concealed drawer slider (16mm with bolt locking)


LW - Cabinet inner width

SKW(16) - Drawer inner width (≤16mm drawer side thickness)

1. Insert the slides into the cabinet

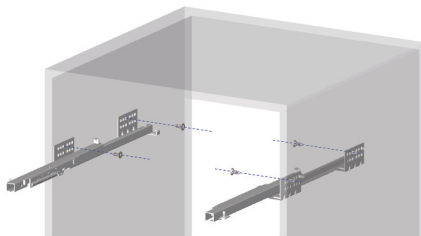


2. Set the drawer on the slides

2.1 Insert the slide hook into the drawer back holes

2.2 Insert the slide adjustable screw into the drawer side wall


2.3 Adjust the left / right screw to make the drawer horizontal

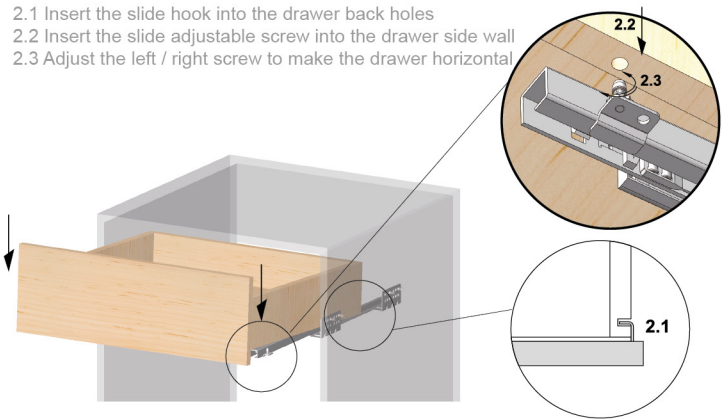

3. Fixing the drawer and slides

3.1 Insert the tapping screws into the corresponding holes on the left / right slides and tap into the drawer

3.2 Close the drawer

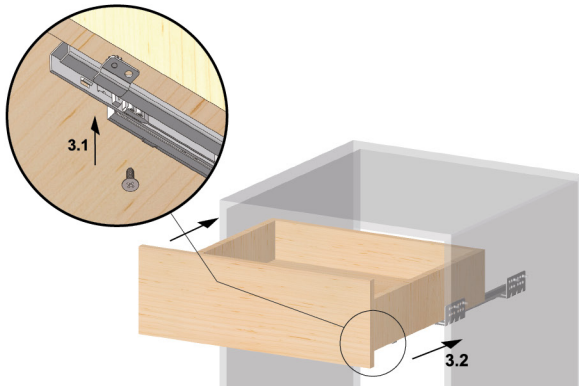


4. Disassembly of the drawer

4.1 Take out the tapping screw to separate the drawer from the slides

4.2 Take up the drawer

4.3 Draw out the drawer

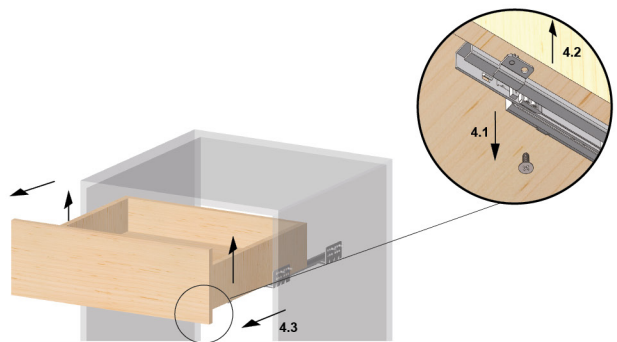

2-Fold light concealed drawer slider (16mm with handle)



Technical specifications:

- Main material: galvanized sheet.
 - Max loading capacity: 20kg.
 - Life guarantee: 40,000 cycles.
 - Thickness of board: $\leq 16\text{mm}$.
-
- Partial extension, handle front fixing device, easy height adjustment, make an economical solution for industry.
 - Excellent stability and silence effect.
 - Special installation method to meet the needs of specific customer installation habits.
 - Gently opening and closing for comfortable lifestyle.




Length	Item No. DP6331
	Push-open
250mm	523.210.040
300mm	523.210.042
350mm	523.210.043
400mm	523.210.044
450mm	523.210.045
500mm	523.210.046

Installation dimensions

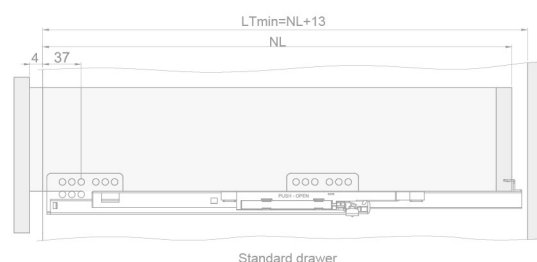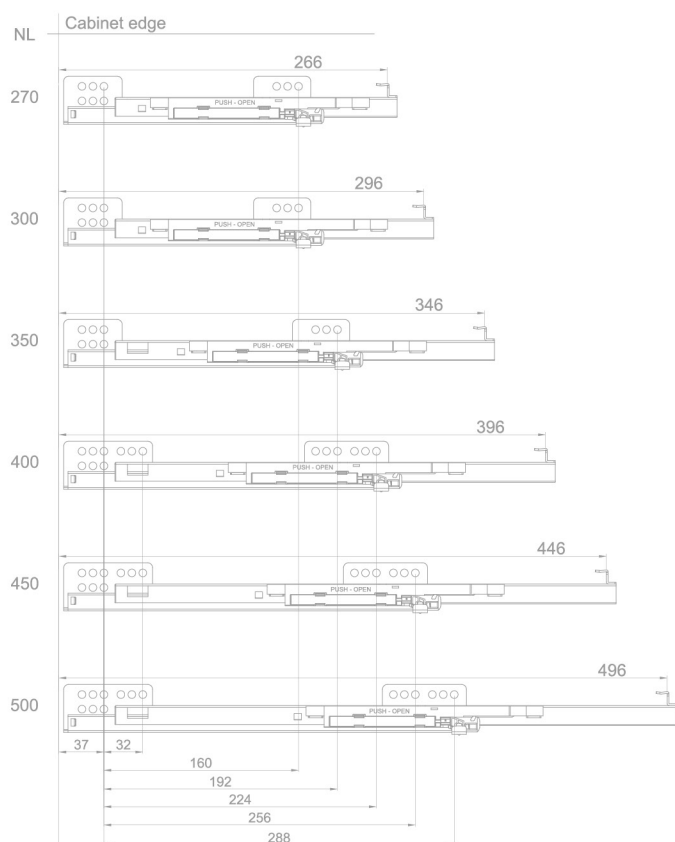


LT - Cabinet inner depth
 NL - Nominal slide length
 X - Board thickness

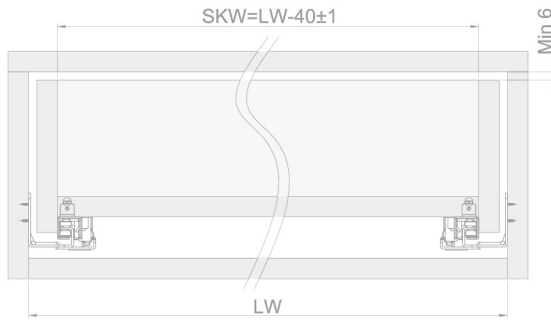DP6331 2-Fold light concealed drawer slider (16mm with handle)


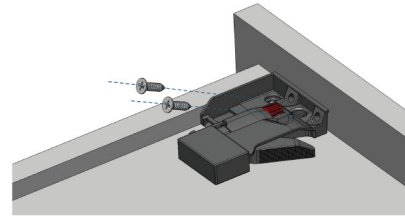
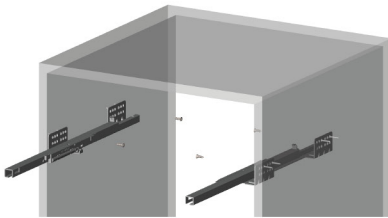
LW - Cabinet inner width

SKW(16) - Drawer inner width(≤16mm drawer side thickness)

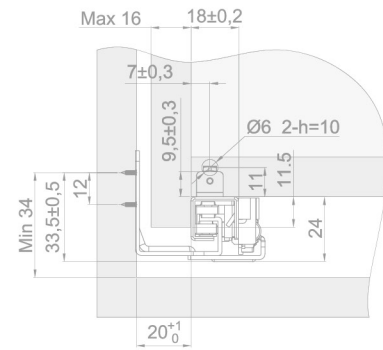



1. Install the slides on the cabinet

2. Install left/ right handle in the front of the drawer



3. Install the drawer on the slides, slide hooks insert into the pre-drilled holes on the drawer back panel

4. Adjust the front panel with plastic wheel on the handle, 0-2.5mm

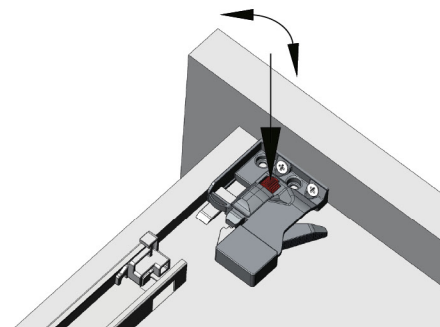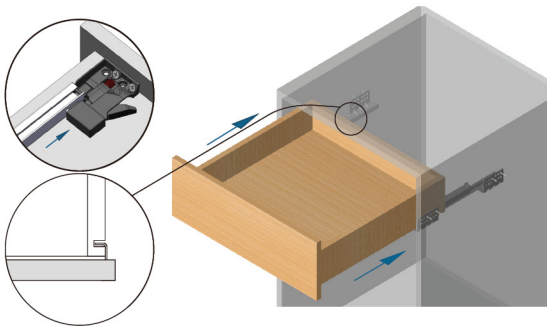

6. Push the handle lever to unlock the drawer, then pull out the drawer

